

Photo/TV Checklist

Mission Operations Directorate Operations Division

Generic, Rev I
June 5, 2007

NOTE

For STS-120 and subsequent flights

National Aeronautics and
Space Administration

Lyndon B. Johnson Space Center
Houston, Texas



Verify this is the correct version for the pending operation (training, simulation or flight).
Electronic copies of FDF books are available. URL: <http://mod.jsc.nasa.gov/do3/FDF/index.html>

PHOTO/TV C/L

GENERIC, REV I (June 5, 2007)

PCN-8 (Jan 4, 2010) Sheet 1 of 1

List of Implemented Change Requests (482s):

P/TV-00743


Incorporate the following:

1. Replace iii thru vi
2. Replace 4-1 and 4-2, 4-21 and 4-22, 4-29 thru 4-32
After 4-32, add 4-33 thru 4-38 (6 pages)
3. Replace 5-5 and 5-6, 5-19 thru 5-22
4. Replace 7-15 and 7-16
5. Replace 11-1 thru 11-6
6. Replace section 17 (17-1 and 17-2)


NOTE

For STS-130 and subsequent flights

Prepared by:


Mission Lead
Publication Manager

Approved by:


Lead, Shuttle Photo/TV Group
Manager, Flight Procedures

Accepted by:


FDF Manager

Encl: 34 pages

File this PCN immediately behind the front cover as a permanent record

PHOTO/TV C/L

GENERIC, REV I (June 5, 2007)

PCN-7 (Sept 30, 2009) Sheet 1 of 1

List of Implemented Change Requests (482s):

P/TV-00741

P/TV-00742

Incorporate the following:


1. Replace iii thru viii
2. Replace 4-1 and 4-2
3. Replace 5-1 and 5-2
4. Replace 7-1 and 7-2, 7-15 thru 7-18 (4 pages),
After 7-18, add 7-18a and 7-18b (2 pages)
Replace 7-23 and 7-24
5. Replace 8-1 and 8-2
6. Replace section 9 (4 pages)
7. Replace 12-15 thru 12-18 (4 pages)
8. Replace 13-3 and 13-4
9. Replace section 16 (16-1 thru 16-6)
10. Replace section 20 (20-1 thru 20-22)
11. Replace section 21 (21-1 and 21-2)

NOTE

For STS-129 and subsequent flights

Prepared by:


 Mission Lead


 Publication Manager

Approved by:


 Lead, Shuttle Photo/TV Group


 Manager, Flight Procedures

Accepted by:


 FDF Manager

Encl: 62 pages

File this PCN immediately behind the front cover as a permanent record

PHOTO/TV C/L

GENERIC, REV I (June 5, 2007)

PCN-6 (May 20, 2009) Sheet 1 of 1

List of Implemented Change Requests (482s):

P/TV-00740

Incorporate the following:

1. Replace iii thru viii
2. Replace section 4 (4-1 thru 4-32)
3. Delete section 4A
4. Replace section 5 (5-1 thru 5-24)
5. Delete section 5A
6. Replace section 7 (7-1 thru 7-24)
7. Delete section 7A
8. Replace section 9 (9-1 thru 9-6)
9. After 12-12, add 12-12a and 12-12b

NOTE

For STS-127 and subsequent flights

Prepared by:


Mission Lead
Publication Manager

Approved by:


Lead, Shuttle Photo/TV Group
Manager, Flight Procedures

Accepted by:


FDF Manager

Encl: 94 pages

File this PCN immediately behind the front cover as a permanent record

PHOTO/TV C/L	GENERIC, REV I (June 5, 2007)
--------------	-------------------------------

PCN-5 (Oct 17, 2008) Sheet 1 of 1

List of Implemented Change Requests (482s):

P/TV-0722

P/TV-0723


<p>NOTE For STS-126 and subsequent flights</p>


Incorporate the following:


1. Replace iii thru viii
2. After 5-38, add section 5A (5A-1 thru 5A-24)
3. After 7-16, add section 7A (7A-1 thru 7A-24)

Prepared by: 
Mission Lead


Publication Manager

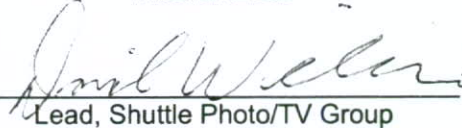Approved by: 
Lead, Shuttle Photo/TV Group


Manager, Shuttle Procedures Management

Accepted by: 
FDF Manager

Encl: 54 pages

File this PCN immediately behind the front cover as a permanent record

PHOTO/TV C/L	GENERIC, REV I (June 5, 2007)
--------------	-------------------------------

PCN-4 (Aug 22, 2008) Sheet 1 of 1

List of Implemented Change Requests (482s):


P/TV-0718

P/TV-0719


Incorporate the following:


1. Replace iii thru viii
2. After 4-30, add section 4A (4A-1 thru 4A-32)


NOTE For STS-125 and subsequent flights

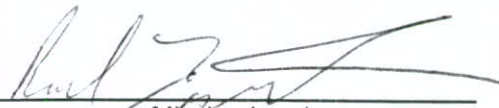Prepared by: 
Mission Lead


Publication Manager

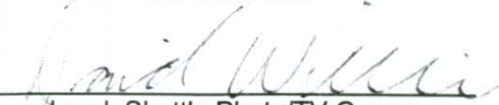Approved by: 
Lead, Shuttle Photo/TV Group


Manager, Shuttle Procedures Management

Accepted by: 
FDF Manager

Encl: 38 pages

File this PCN immediately behind the front cover as a permanent record

PHOTO/TV C/L	GENERIC, REV I (June 5, 2007)
--------------	-------------------------------

PCN-3 (April 4, 2008) Sheet 1 of 1

List of Implemented Change Requests (482s):

P/TV-0717

Incorporate the following:


1. Replace iii thru vi
2. Replace 11-9 and 11-10

<p>NOTE For STS-124 and subsequent flights</p>

Prepared by: 
Mission Lead


Publication Manager

Approved by: 
Lead, Shuttle Photo/TV Group

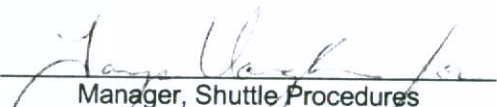
Manager, Shuttle Procedures Management

Accepted by: 
FDF Manager

Encl: 6 pages

File this PCN immediately behind the front cover as a permanent record

PHOTO/TV C/L	GENERIC, REV I (June 5, 2007)
--------------	-------------------------------

PCN-2 (Nov 7, 2007) Sheet 1 of 1

List of Implemented Change Requests (482s):

P/TV-0716

Incorporate the following:

1. Replace iii thru vi
2. Replace 7-9 and 7-10
3. Replace 11-1 and 11-2, 11-5 thru 11-10
4. Replace 20-1 and 20-2, 20-7 and 20-8, 20-15 and 20-16

<p>NOTE For STS-122 and subsequent flights</p>

Prepared by: *David Walker FOR PAUL TWERINA* Mission Lead *Carol H. Pierce* Publication Manager

Approved by: *David Walker* Lead, Shuttle Photo/TV Group *(Timberly Johnson)* Manager, Shuttle Procedures Management

Accepted by: *Michael T. Alt* FDF Manager

Encl: 20 pages

File this PCN immediately behind the front cover as a permanent record

PHOTO/TV C/L

GENERIC, REV I (June 5, 2007)

PCN-1 (Sept 14, 2007) Sheet 1 of 1

List of Implemented Change Requests (482s):

P/TV-0714
P/TV-0715

Incorporate the following:

1. Replace iii thru vi
2. Replace 4-11 and 4-12, 4-19 thru 4-24
3. Replace Section 5 (38 pages)
After 5-38, delete 5-39 and 5-40
4. Replace 9-3 thru 9-6
5. Replace 11-9 thru 11-12
6. Replace 12-1 and 12-2, 12-13 thru 12-20
7. Replace 16-3 and 16-4
8. Replace 20-3 thru 20-6, 20-13 and 20-14, 20-17 thru 20-20



NOTE

For STS-120 and subsequent flights

Prepared by:


Mission Lead
Publication Manager

Approved by:

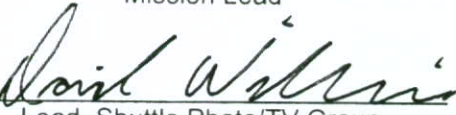
Lead, Shuttle Photo/TV Group
Manager, Shuttle Procedures
Management

Accepted by:


FDF Manager

Encl: 80 pages

File this PCN immediately behind the front cover as a permanent record

MISSION OPERATIONS DIRECTORATE

PHOTO/TV CHECKLIST

GENERIC, REVISION I
June 5, 2007

PREPARED BY:



C. Pierce
Publication Manager

APPROVED BY:



D. Williams
Technical Lead, Shuttle Photo/TV Group

K. Johnson
Manager, Shuttle Procedures Management

ACCEPTED BY:



Michael T. Hurt
FDF Manager

This document is under the configuration control of the Crew Procedures Control Board (CPCB). All proposed changes must be submitted via FDF Workflow Crew Procedure Change Request (CR) to DO3/FDF Manager.

Additional distribution of this book, for official use only, may be requested in writing to DO3/PMO Administrator. The request must include justification and requester's name, organization, position, and phone number. Contractor requests are made through the NASA or DOD organization supported. Deletions, reduction in quantity, or change of address may be submitted to DO3/FDF Management Office, 281-244-1184.

Incorporates the following:	
482#:	P/TV-0710 P/TV-0711 P/TV-0712 P/TV-0713

AREAS OF TECHNICAL RESPONSIBILITY

Publication Manager	DO35/C. Pierce	281-483-6087
Backup Publication Manager	DO35/L. Giles	281-244-9068
Technical Lead, Shuttle Photo/TV Group	DX34/D. Williams	281-244-7882

PHOTO/TV CHECKLIST

LIST OF EFFECTIVE PAGES

GENERIC	11/13/87	PCN-4	08/22/08
REV I	06/05/07	PCN-5	10/17/08
PCN-1	09/14/07	PCN-6	05/20/09
PCN-2	11/07/07	PCN-7	09/30/09
PCN-3	04/04/08	PCN-8	01/04/10

Sign Off	*	ALL/GEN I	4-29	†	ALL/GEN I,8
ii.....	*	ALL/GEN I	4-30	†	ALL/GEN I,8
iii.....	*	ALL/GEN I,8	4-31	†	ALL/GEN I,8
iv.....	*	ALL/GEN I,8	4-32	†	ALL/GEN I,8
v	*	ALL/GEN I,8	4-33	†	ALL/GEN I,8
vi.....	*	ALL/GEN I,7	4-34	†	ALL/GEN I,8
vii.....	*	ALL/GEN I,7	4-35	†	ALL/GEN I,8
viii.....	*	ALL/GEN I	4-36	†	ALL/GEN I,8
1-i.....		ALL/GEN I	4-37	†	ALL/GEN I,8
1-ii		ALL/GEN I	4-38	†	ALL/GEN I,8
1-1	Δ	ALL/GEN I	5-1	†	ALL/GEN I,6
1-2.....	Δ	ALL/GEN I	5-2	†	ALL/GEN I,7
2-1	Δ	ALL/GEN I	5-3	†	ALL/GEN I,6
2-2.....	Δ	ALL/GEN I	5-4	†	ALL/GEN I,6
3-1	Δ	ALL/GEN I	5-5	†	ALL/GEN I,8
3-2.....	Δ	ALL/GEN I	5-6	†	ALL/GEN I,6
4-i.....		ALL/GEN I	5-7	†⊗	ALL/GEN I,6
4-ii		ALL/GEN I	5-8	†⊗	ALL/GEN I,6
4-1	†	ALL/GEN I,8	5-9	†⊗	ALL/GEN I,6
4-2.....	†	ALL/GEN I,7	5-10	†	ALL/GEN I,6
4-3.....	†	ALL/GEN I,6	5-11	†	ALL/GEN I,6
4-4.....	†	ALL/GEN I,6	5-12	†	ALL/GEN I,6
4-5.....	†⊗	ALL/GEN I,6	5-13	†⊗	ALL/GEN I,6
4-6.....	†⊗	ALL/GEN I,6	5-14	†⊗	ALL/GEN I,6
4-7.....	†⊗	ALL/GEN I,6	5-15	†⊗	ALL/GEN I,6
4-8.....	†	ALL/GEN I,6	5-16	†⊗	ALL/GEN I,6
4-9.....	†	ALL/GEN I,6	5-17	†	ALL/GEN I,6
4-10.....	†	ALL/GEN I,6	5-18	†	ALL/GEN I,6
4-11.....	†	ALL/GEN I,6	5-19	†	ALL/GEN I,8
4-12.....	†	ALL/GEN I,6	5-20	†	ALL/GEN I,6
4-13.....	†	ALL/GEN I,6	5-21	†	ALL/GEN I,6
4-14.....	†	ALL/GEN I,6	5-22	†	ALL/GEN I,8
4-15.....	†	ALL/GEN I,6	5-23	†	ALL/GEN I,6
4-16.....	†	ALL/GEN I,6	5-24	†	ALL/GEN I,6
4-17.....	†	ALL/GEN I,6	6-1	†	ALL/GEN I
4-18.....	†	ALL/GEN I,6	6-2	†	ALL/GEN I
4-19.....	†	ALL/GEN I,6	6-3	†	ALL/GEN I
4-20.....	†	ALL/GEN I,6	6-4	†	ALL/GEN I
4-21.....	†	ALL/GEN I,6	6-5	†⊗	ALL/GEN I
4-22.....	†⊗	ALL/GEN I,8	6-6	†⊗	ALL/GEN I
4-23.....	†⊗	ALL/GEN I,6	6-7	†	ALL/GEN I
4-24.....	†⊗	ALL/GEN I,6	6-8	†	ALL/GEN I
4-25.....	†⊗	ALL/GEN I,6	6-9	†	ALL/GEN I
4-26.....	†⊗	ALL/GEN I,6	6-10.....	†	ALL/GEN I
4-27.....	†⊗	ALL/GEN I,6	6-11.....	†	ALL/GEN I
4-28.....	†⊗	ALL/GEN I,6	6-12.....	†	ALL/GEN I

- * – Omit from flight book
- Δ – Replace with pages from Flight Supplement
- † – May be replaced with CD in flight book only
- ⊗ – Flight copies of this page contain color

6-13	†	ALL/GEN I	10-13	†	ALL/GEN I
6-14	†	ALL/GEN I	10-14	†	ALL/GEN I
6-15	†	ALL/GEN I	10-15	†	ALL/GEN I
6-16	†	ALL/GEN I	10-16	†	ALL/GEN I
6-17	†	ALL/GEN I	10-17	†	ALL/GEN I
6-18	†	ALL/GEN I	10-18	†	ALL/GEN I
7-1	†	ALL/GEN I,7	10-19	†	ALL/GEN I
7-2	†	ALL/GEN I,7	10-20	†	ALL/GEN I
7-3	†	ALL/GEN I,6	10-21	†	ALL/GEN I
7-4	†	ALL/GEN I,6	10-22	†	ALL/GEN I
7-5	†	ALL/GEN I,6	10-23	†	ALL/GEN I
7-6	†	ALL/GEN I,6	10-24	†	ALL/GEN I
7-7	†⊗	ALL/GEN I,6	10-25	†	ALL/GEN I
7-8	†	ALL/GEN I,6	10-26	†	ALL/GEN I
7-9	†	ALL/GEN I,6	11-1	†	ALL/GEN I
7-10	†	ALL/GEN I,6	11-2	†	ALL/GEN I,8
7-11	†	ALL/GEN I,6	11-3	†	ALL/GEN I
7-12	†	ALL/GEN I,6	11-4	†	ALL/GEN I,8
7-13	†	ALL/GEN I,6	11-5	†	ALL/GEN I,8
7-14	†	ALL/GEN I,6	11-6	†	ALL/GEN I,2
7-15	†⊗	ALL/GEN I,8	11-7	†	ALL/GEN I,2
7-16	†	ALL/GEN I,7	11-8	†	ALL/GEN I,2
7-17	†	ALL/GEN I,7	11-9	†	ALL/GEN I
7-18	†	ALL/GEN I,7	11-10	†	ALL/GEN I,3
7-18a	†	ALL/GEN I,7	11-11	†⊗	ALL/GEN I,1
7-18b	†	ALL/GEN I,7	11-12	†	ALL/GEN I,1
7-19	†	ALL/GEN I,6	12-1	†	ALL/GEN I,1
7-20	†	ALL/GEN I,6	12-2	†	ALL/GEN I
7-21	†	ALL/GEN I,6	12-3	†	ALL/GEN I
7-22	†	ALL/GEN I,6	12-4	†	ALL/GEN I
7-23	†⊗	ALL/GEN I,6	12-5	†	ALL/GEN I
7-24	†⊗	ALL/GEN I,7	12-6	†	ALL/GEN I
8-1	†	ALL/GEN I	12-7	†	ALL/GEN I
8-2	†	ALL/GEN I,7	12-8	†	ALL/GEN I
8-3	†	ALL/GEN I	12-9	†	ALL/GEN I
8-4	†	ALL/GEN I	12-10	†	ALL/GEN I
8-5	†	ALL/GEN I	12-11	†	ALL/GEN I
8-6	†	ALL/GEN I	12-12	†	ALL/GEN I
9-1	†	ALL/GEN I,7	12-12a	†	ALL/GEN I,6
9-2	†	ALL/GEN I,7	12-12b	†	ALL/GEN I,6
9-3	†⊗	ALL/GEN I,7	12-13	†	ALL/GEN I,1
9-4	†⊗	ALL/GEN I,7	12-14	†⊗	ALL/GEN I,1
9-5	†	deleted	12-15	†	ALL/GEN I,1
9-6	†	deleted	12-16	†	ALL/GEN I,7
10-1	†	ALL/GEN I	12-17	†	ALL/GEN I,7
10-2	†	ALL/GEN I	12-18	†	ALL/GEN I,1
10-3	†	ALL/GEN I	12-19	†	ALL/GEN I,1
10-4	†	ALL/GEN I	12-20	†	ALL/GEN I,1
10-5	†	ALL/GEN I	13-1	†	ALL/GEN I
10-6	†⊗	ALL/GEN I	13-2	†	ALL/GEN I
10-7	†	ALL/GEN I	13-3	†	ALL/GEN I
10-8	†	ALL/GEN I	13-4	†⊗	ALL/GEN I,7
10-9	†	ALL/GEN I	13-5	†⊗	ALL/GEN I
10-10	†	ALL/GEN I	13-6	†⊗	ALL/GEN I
10-11	†	ALL/GEN I	13-7	†⊗	ALL/GEN I
10-12	†	ALL/GEN I	13-8	†⊗	ALL/GEN I

† – May be replaced with CD in flight book only

⊗ – Flight copies of this page contain color

13-9	†	ALL/GEN I	20-7	†	ALL/GEN I,7
13-10	†	ALL/GEN I	20-8	†	ALL/GEN I,7
13-11	†	ALL/GEN I	20-9	†	ALL/GEN I,7
13-12	†	ALL/GEN I	20-10	†	ALL/GEN I,7
14-1	†	ALL/GEN I	20-11	†	ALL/GEN I,7
14-2	†	ALL/GEN I	20-12	†	ALL/GEN I,7
14-3	†	ALL/GEN I	20-13	†	ALL/GEN I,7
14-4	†	ALL/GEN I	20-14	†	ALL/GEN I,7
15-1	†	ALL/GEN I	20-15	†⊗	ALL/GEN I,7
15-2	†	ALL/GEN I	20-16	†	ALL/GEN I,7
15-3	†	ALL/GEN I	20-17	†	ALL/GEN I,7
15-4	†	ALL/GEN I	20-18	†⊗	ALL/GEN I,7
15-5	†	ALL/GEN I	20-19	†	ALL/GEN I,7
15-6	†	ALL/GEN I	20-20	†	ALL/GEN I,7
15-7	†	ALL/GEN I	20-21	†	ALL/GEN I,7
15-8	†	ALL/GEN I	20-22	†	ALL/GEN I,7
15-9	†	ALL/GEN I	21-1	†	ALL/GEN I
15-10	†	ALL/GEN I	21-2	†	ALL/GEN I,7
15-11	†	ALL/GEN I			
15-12	†	ALL/GEN I			
15-13	†	ALL/GEN I			
15-14	†	ALL/GEN I			
15-15	†	ALL/GEN I			
15-16	†	ALL/GEN I			
16-1	†	ALL/GEN I,7			
16-2	†	ALL/GEN I			
16-3	†	ALL/GEN I,7			
16-4	†	ALL/GEN I,7			
16-5	†	ALL/GEN I,7			
16-6	†	ALL/GEN I,7			
17-1	†	ALL/GEN I			
17-2	†	ALL/GEN I,8			
18-1	†	ALL/GEN I			
18-2	†	ALL/GEN I			
18-3	†	ALL/GEN I			
18-4	†	ALL/GEN I			
18-5	†	ALL/GEN I			
18-6	†	ALL/GEN I			
19-1	†	ALL/GEN I			
19-2	†	ALL/GEN I			
19-3	†	ALL/GEN I			
19-4	†	ALL/GEN I			
19-5	†	ALL/GEN I			
19-6	†	ALL/GEN I			
19-7	†	ALL/GEN I			
19-8	†	ALL/GEN I			
19-9	†	ALL/GEN I			
19-10	†	ALL/GEN I			
19-11	†	ALL/GEN I			
19-12	†	ALL/GEN I			
20-1	†	ALL/GEN I,7			
20-2	†	ALL/GEN I,7			
20-3	†	ALL/GEN I,7			
20-4	†	ALL/GEN I,7			
20-5	†	ALL/GEN I,7			
20-6	†	ALL/GEN I,7			

† – May be replaced with CD in flight book only

⊗ – Flight copies of this page contain color

This Page Intentionally Blank

TABLE OF CONTENTS

	<u>PAGE</u>
<u>FLIGHT SPECIFIC</u>	
<u>SCENES</u>	flt suppl
<u>REFERENCED PROCEDURES</u>	flt suppl
<u>CUE CARD CONFIGURATION</u>	flt suppl
<u>GENERIC</u>	
<u>NIKON D2Xs</u>	4-1
<u>D2Xs EVA CAMR</u>	5-1
<u>EVA IR CAMR</u>	6-1
<u>CANON G1</u>	7-1
<u>SONY V10</u>	8-1
<u>PORTABLE MONITORS</u>	9-1
<u>CCTV</u>	10-1
<u>CENTERLINE (C/L) CAMR</u>	11-1
<u>DTV</u>	12-1
<u>BPSMU</u>	13-1
<u>MINI-CAM</u>	14-1
<u>WIRELESS VIDEO SYSTEM (WVS)</u>	15-1
<u>SEQUENTIAL STILL VIDEO (SSV)</u>	16-1
<u>BINOCULARS</u>	17-1
<u>FIBERSCOPE</u>	18-1
<u>LASER DYNAMIC RANGE IMAGER (LDRI)</u>	19-1
<u>LASER CAMR SYSTEM (LCS)/INTEGRATED SENSOR INSPECTION SYSTEM DIGITAL CAMR (IDC)</u>	20-1
<u>BATTS & FUSES</u>	21-1

This Page Intentionally Blank

This Page Intentionally Blank

Replace this page with section 1 of the Flight Supplement

I

This Page Intentionally Blank

Replace this page with section 2 of the Flight Supplement

I

This Page Intentionally Blank

Replace this page with section 3 of the Flight Supplement

I

This Page Intentionally Blank

NOTE

The hardcopy version of sections 4 thru 21 may be replaced with a CD for flight and inserted in the back of the PHOTO/TV flight-supplement flight book

This Page Intentionally Blank

NIKON D2Xs

	<u>PAGE</u>
SPECIFICATIONS.....	4-2
CAMR BODY	4-2
FLASH	4-2
LENS DATA.....	4-3
NOMENCLATURE.....	4-4
CAMR MENU.....	4-12
NOMINAL SETUP	4-22
SB-800 REMOTE FLASH.....	4-29
DATE/TIME SET.....	4-33
DELETING SINGLE IMAGES.....	4-34
ADDING .WAV FILES TO AN IMAGE	4-34
DELETING .WAV FILE FROM AN IMAGE	4-34
.WAV FILE PLAYBACK.....	4-34
IMAGE FILE TRANSFER	4-35
DNLK FROM FLASH CARD	4-35
DCS FILE TO HARD DRIVE.....	4-35
RECOVER LOST IMAGES.....	4-36

D2Xs

SPECIFICATIONS

CAMR BODY

CMOS SENSOR SIZE: 23.7mm x 15.7mm
PIXEL COUNT: 4288 x 2848
DISK/FRAME: 1 GB, ~90 frames; 4 GB, ~360 frames
RAW FILE SIZE: ~10 MB (compressed)
EXPOSURE CONTROL: Auto (program, shutter priority, aperture priority), Manual
METER PATTERN: 3D Color Matrix, Center Weighted, Spot
EXPOSURE COMP: ± 5 in 1, 1/3, 1/2 EV steps
SHUTTER:
 Program & Aperture Priority – 1/8000 thru 30 sec (virtually stepless)
 Manual & Shutter Priority – 1/8000 thru 30 sec (1,1/3,1/2) stop increments), 250x, and Bulb (manual only)
ISO Setting: 100-3200; >800 controlled by menu
FRAME RATE: Single, C_H – 5 fps, C_L – 1-4 fps
 Burst Rate: Mode dependent
CAMR BATT: Li-ION EN-EL4A
CAMR BATT VOLTAGE: 11.1VDC
CAMR BATT LIFETIME: ~1000 frames
CAMR WEIGHT: 2.4 lb (w/Batt & Memory Card)

FLASH

SB-28 DX
 BATT: 4AA
 BATT LIFETIME: 200+ images
 WEIGHT: w/o Batts – 0.85 lb

SB-800 DX
 BATT: 4AA
 BATT LIFETIME: 200+ images
 WEIGHT: w/o Batts – .77 lb

D2Xs (Continued)

LENS DATA

NOTE


Do not use non-AF lens w/D2Xs

Lens	Aperture Range (f/stop)	Approximate Field of View (FOV)			Approx Minimum Focus Distance (ft)	Weight (lb)	Filter Size	M-A Switch
		Horizontal	Vertical	Diagonal				
10.5mm AF DXG	f/2.8-f/22	–	–	180°	0.5	.67	Rear	
12-24mm AF DXG	f/4.0-f/22	89°-53°	66°-36°	100°-61°	1.0	1.02	77mm	Yes
16mm AF	f/2.8-f/22	73°	52°	83°	1.0	0.69	Rear	
17-35mm AFD	f/2.8-f/22	70°-37°	50°-25°	80°-44°	1.0	1.64	77mm	Yes
20mm AF	f/2.8-f/22	61°	43°	71°	0.85	0.62	62mm	
20-35mm AFD	f/2.8-f/22	61°-37°	43°-25°	71-44°	1.7	1.36	77mm	Yes
28mm AF	f/2.8-f/22	46°	31°	54°	1.25	0.46	52mm	
28mm AFD	f/1.4-f/16	46°	31°	54°	1.14	1.15	72mm	Yes
28-70mm AFD	f/2.8-f/22	46°-19°	31°-13°	54°-23°	2.3 (1.5 ft macro)	1.95	77mm	Yes
35mm AF	f/2.0-f/22	37°	25°	44°	0.9	0.51	52mm	
24-50mm AF	f/3.3(4.5)-f/22	52°-27°	36°-18°	61°-32°	2.0 (1.6 ft macro)	0.86	62mm	
35-70mm AF	f/2.8-f/22	37°-19°	25°-13°	44°-23°	2.0 (0.9 ft macro)	1.5	62mm	
50mm AFD	f/1.4-f/16	27°	18°	32°	1.5	0.59	52mm	
60mm AF	f/2.8-f/32	22°	15°	27°	0.73	0.93	62mm	Yes
85mm AF	f/1.4-f/16	16°	11°	19°	2.8	1.23	77mm	Yes
105mm AF	f/2.8-f/32	13°	9°	15°	1.0	1.22	52mm	Yes
180mm AFD	f/2.8-f/22	8°	5°	9°	5.0	1.72	72mm	Yes
80-200mm AFD	f/2.8-f/22	16°-7°	11°-4.5°	20°-8°	6.0	2.98	77mm	Yes
300mm AF	f/2.8-f/22	4°	3°	5°	10.0	6.36	39mm	Yes
400mm AFD	f/2.8-f/22	3.4°	2.2°	4.1°	9.75	10.58	52mm	Yes

D2Xs (Continued)

NOMENCLATURE

CAMR – FRONT

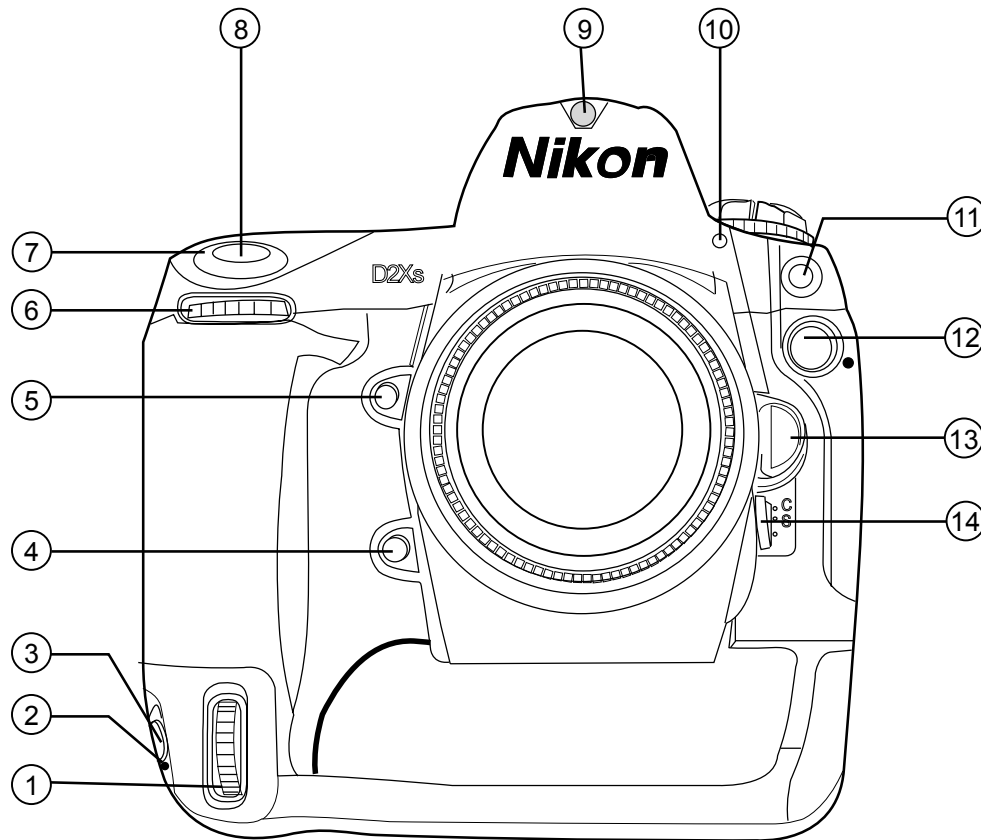


- ① Vertical Shooting Sub-command Dial
- ② Vertical Shooting Shutter-release Lock pb
- ③ Vertical Shooting Shutter-release pb
- ④ Function pb
- ⑤ Depth-of-field Preview pb
- ⑥ Sub-command Dial
- ⑦ Power sw
- ⑧ Shutter Release pb
- ⑨ Ambient Light Sensor
- ⑩ Self-timer LED
- ⑪ Flash Sync Terminal
- ⑫ 10-pin Remote Terminal
- ⑬ Lens Release pb
- ⑭ Focus mode Selector

jsc48037_152.cvx

D2Xs (Continued)

NOMENCLATURE (Continued)

CAMR – BACK

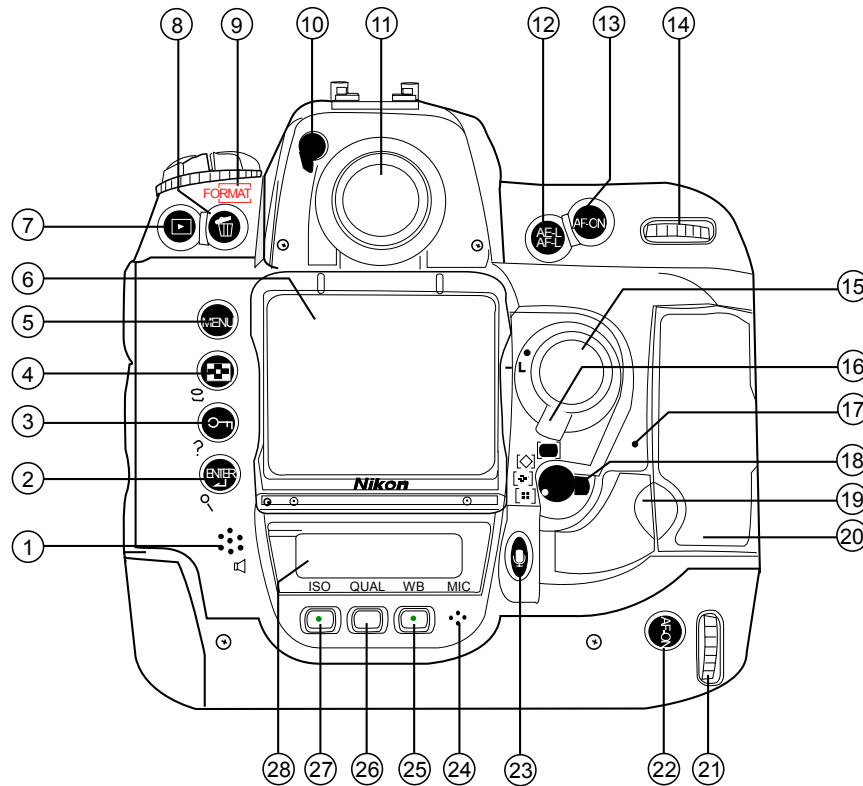


- ① Speaker
- ② ENTER (ENTER)/Playback Zoom (Z) pb
- ③ Protect (P)/HELP (?) pb
- ④ Thumbnail (T) pb
- ⑤ MENU (MENU) pb
- ⑥ Monitor
- ⑦ Playback (R) pb
- ⑧ Delete (X) pb
- ⑨ FORMAT (FORMAT) pb
- ⑩ Eyepiece Shutter Lever
- ⑪ Viewfinder Eyepiece
- ⑫ AE/AF Lock (AE-L) pb
- ⑬ AF-ON (AF-ON) pb
- ⑭ Main Command Dial
- ⑮ Multi Selector
- ⑯ Focus Selector Lock
- ⑰ Memory Card Access Lamp
- ⑱ AF-area Mode Selector
- ⑲ Card-slot Cover Release Button (under Cover)
- ⑳ Memory Card Slot Cover
- ㉑ Main Command Dial for Vertical Shooting
- ㉒ AF-ON (AF-ON) for Vertical Shooting pb
- ㉓ Microphone (MIC) pb
- ㉔ Microphone
- ㉕ White Balance (WB) pb
- ㉖ Image Quality/Size (QUAL) pb
- ㉗ ISO Sensitivity (ISO) pb
- ㉘ Rear Control Panel








JSC48037_153.cvx

D2Xs (Continued)

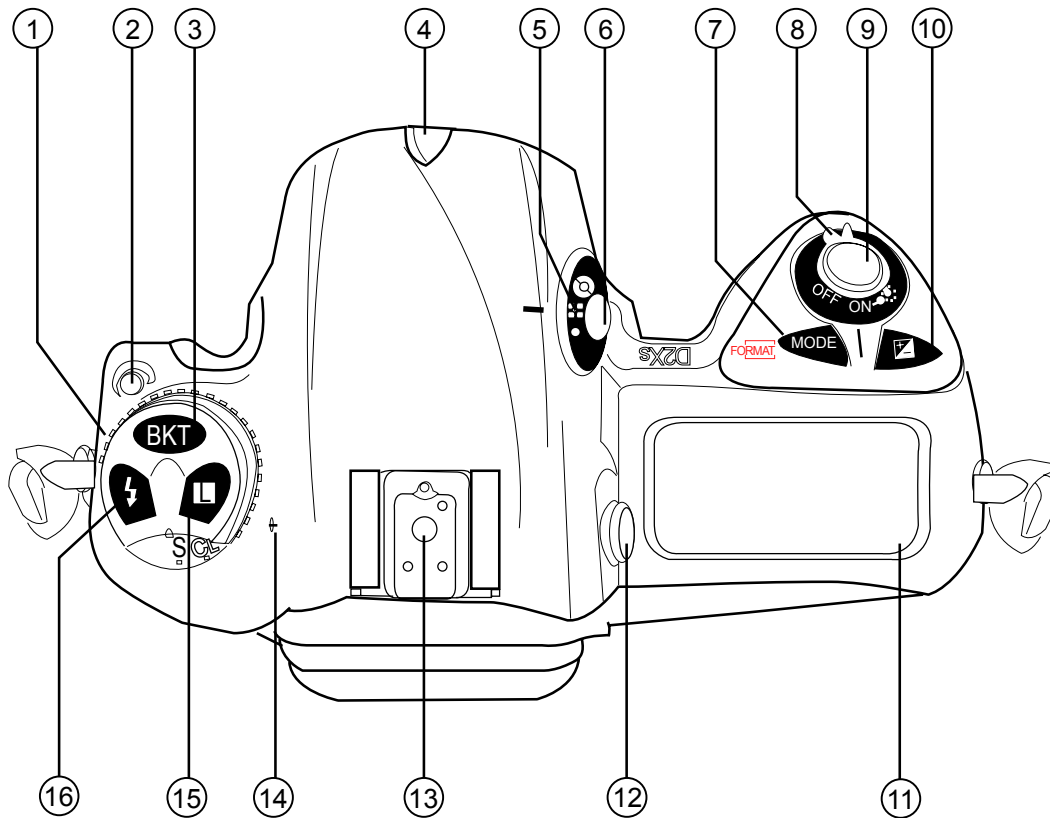NOMENCLATURE (Continued)

CAMR – TOP




- ① Shooting Mode Dial
- ② Shooting Mode Dial Lock Release
- ③ Bracket () pb
- ④ Ambient Light Sensor
- ⑤ Meter Selector
- ⑥ Meter Selector Lock pb
- ⑦ Exposure Mode ()/Format () pb
- ⑧ Power sw
- ⑨ Shutter-release pb
- ⑩ Exposure Compensation () pb
- ⑪ Top LCD
- ⑫ Diopter Adjustment Knob
- ⑬ Accessory Shoe
- ⑭ Focal Plane Mark ()
- ⑮ Lock () pb
- ⑯ Flash Sync Mode () pb

jsc48037_154.cvx


D2Xs (Continued)

NOMENCLATURE (Continued)

CAMR – LEFT SIDE

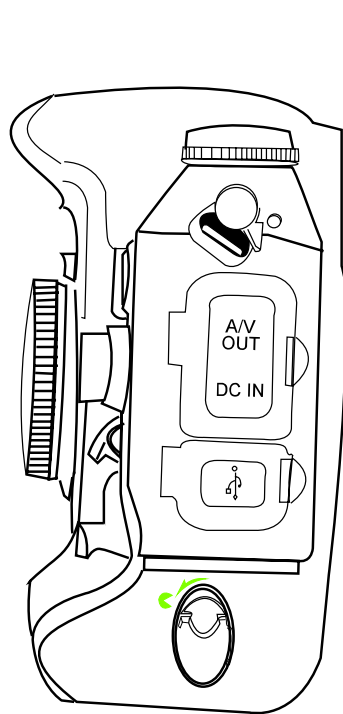

Housing Doors Closed

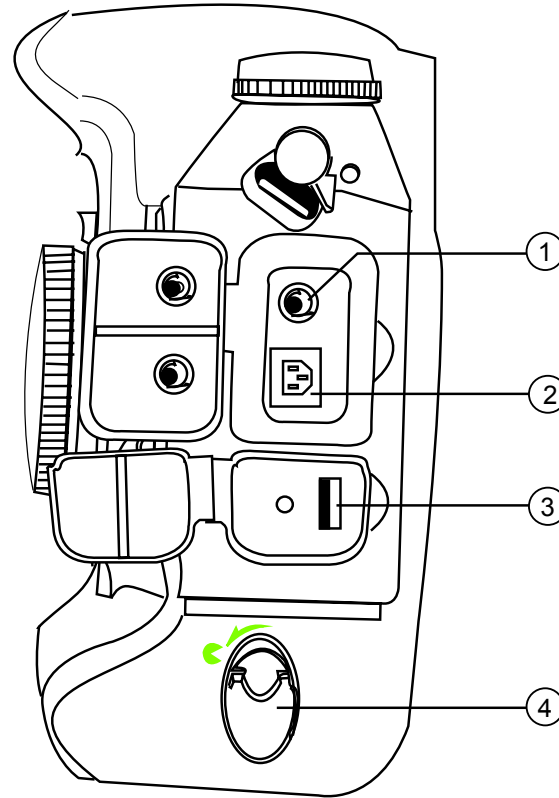

Housing Doors Open


- ① Audio/video (A/V) Connector
- ② DC-in Connector
- ③ USB Connector
- ④ Battery Cover Latch

jsc48037_155.cvx

D2Xs (Continued)

NOMENCLATURE (Continued)

CAMR – TOP CONTROL PANEL

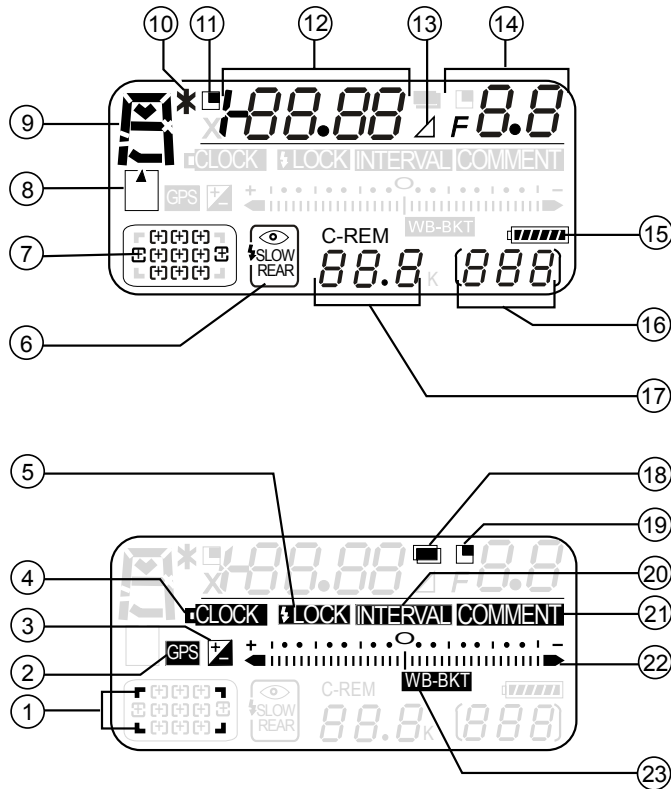


- ① High Speed Crop
- ② GPS Connection
- ③ Exposure Compensation
- ④ Clock Battery
- ⑤ Flash Exposure Lock
- ⑥ Flash Sync Mode
- ⑦ AF Area Mode
- ⑧ Memory Card
- ⑨ Exposure Mode
- ⑩ Flexible Program
- ⑪ Shutter Speed Lock Icon
- ⑫ Shutter Speed
Exposure Compensation Value
- ⑬ Aperture Delta
- ⑭ Aperture (f/number)
- ⑮ Battery
- ⑯ Frame Count
- ⑰ Number of Remaining Exposures
- ⑱ Multiple Exposure
- ⑲ Aperture Lock Icon
- ⑳ Interval Timer
- ㉑ Image Comment
- ㉒ Manual Exposure Meter
Bracketing Progress Indicator
- ㉓ Bracketing Indicator

jsc48037_156.cvx

D2Xs (Continued)

NOMENCLATURE (Continued)

CAMR – REAR CONTROL PANEL

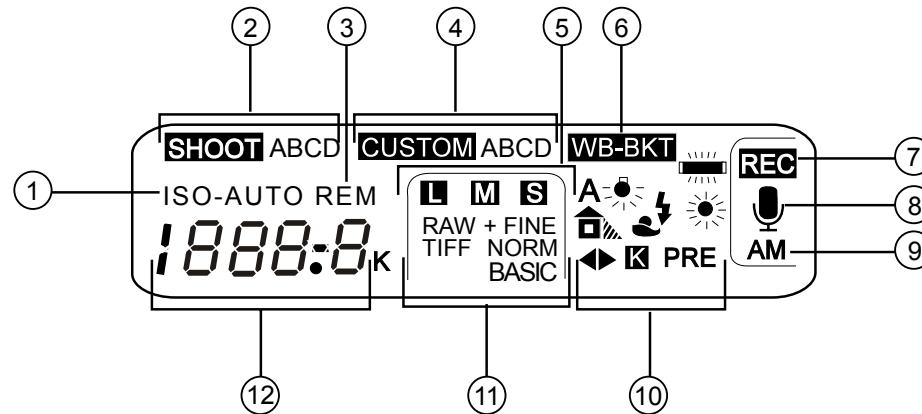


- | | |
|--------------------------------------|--|
| ① ISO Sensitivity Indicator | ⑦ Voice Memo Recording Indicator (Shooting Mode) |
| ② Shooting Menu Settings Bank | ⑧ Voice Memo Status Indicator |
| ③ Remaining Exposure Indicator | ⑨ Voice Memo Recording Mode |
| ④ Custom Settings Bank | ⑩ White Balance Mode |
| ⑤ Image Size | ⑪ Image Quality |
| ⑥ White Balance Bracketing Indicator | ⑫ ISO Sensitivity Length of Voice Memo |

jsc48037_157.cvx

D2Xs (Continued)

NOMENCLATURE (Continued)

VIEWFINDER DISPLAY – LOWER BAR

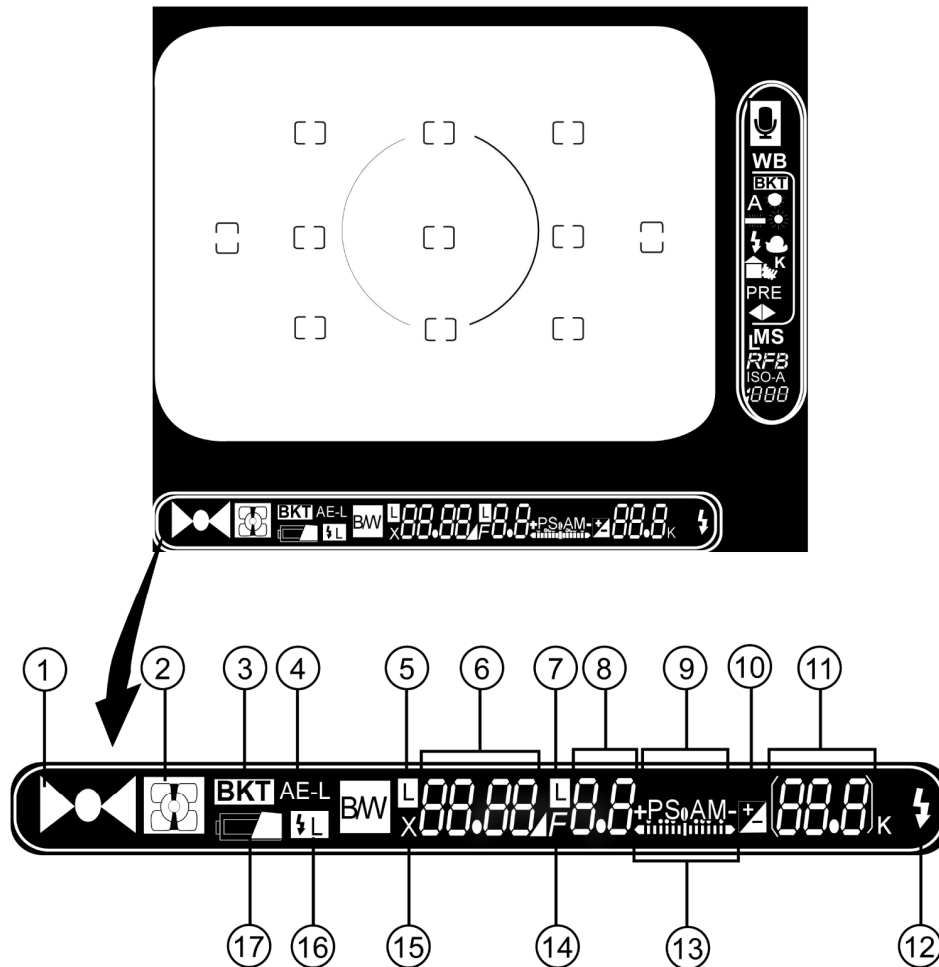


- ① Focus Indicator
- ② Metering
- ③ Bracketing Indicator
- ④ Autoexposure (AE) Lock
- ⑤ Shutter Speed Lock Icon
- ⑥ Shutter Speed
- ⑦ Aperture Lock Icon
- ⑧ Aperture (f/number)
- ⑨ Exposure Mode
- ⑩ Exposure Compensation Indicator
- ⑪ Frame Counter
- ⑫ Flash Ready Indicator
- ⑬ Electronic Analog Exposure Display
- ⑭ Aperture Stop Indicator
- ⑮ Sync Indicator
- ⑯ FV Lock Indicator
- ⑰ Battery Indicator

jsc48037_158.cvx

D2Xs (Continued)

NOMENCLATURE (Concluded)

VIEWFINDER DISPLAY – RIGHT SIDE BAR

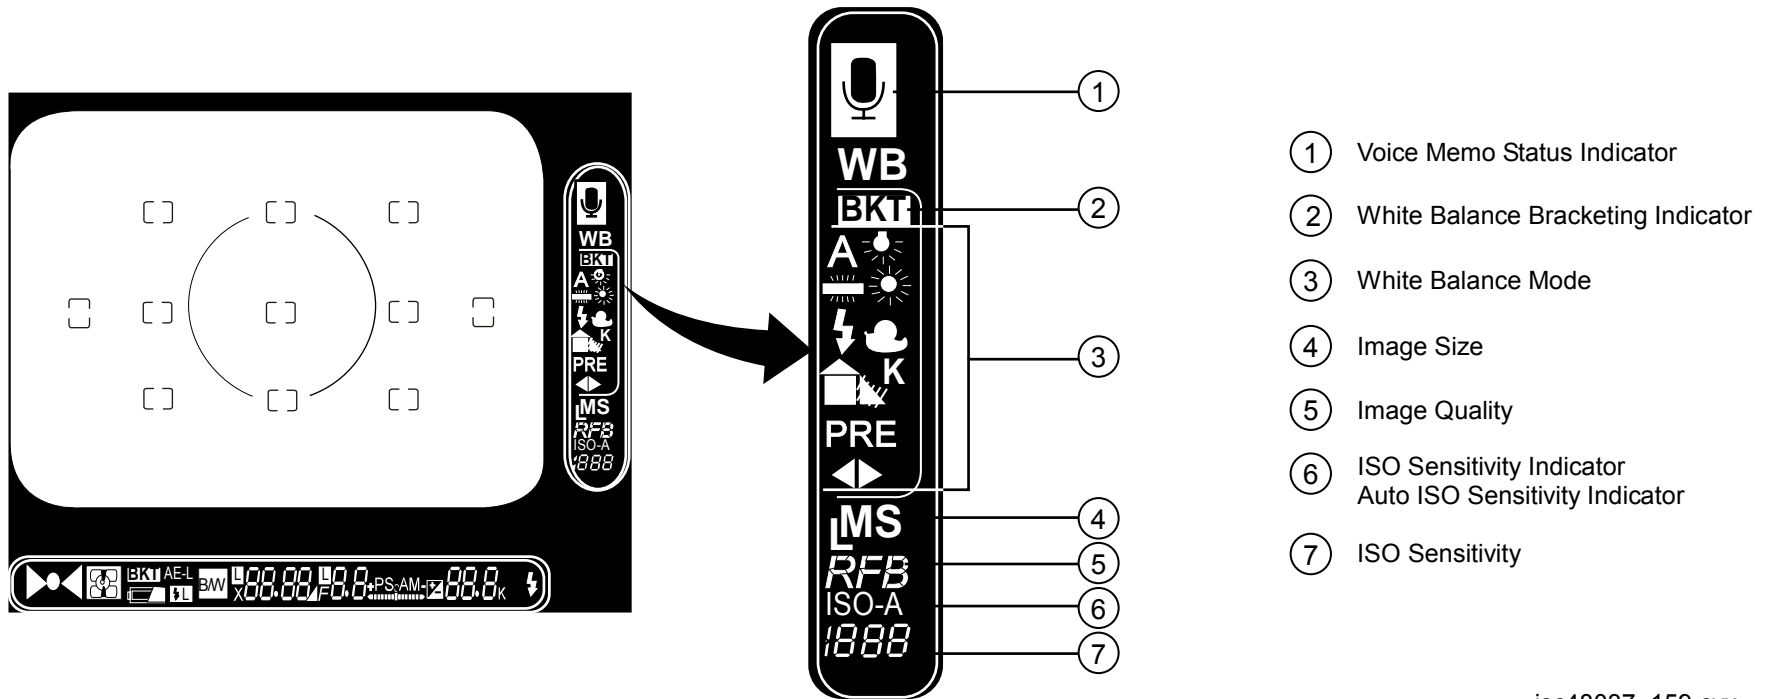

jsc48037_159.cvx

D2Xs (Continued)

CAMR MENU

Level 1	Level 2	Level 3	Level 4	Level 5	
PLAYBACK MENU	Delete	Selected	<i>Choose Image</i>		
		All			
	Playback folder	ND2XS			
		All			
		Current			
	Slide show	Start			
		Frame interval	2 s		
			3 s		
			5 s		
			10 s		
		Audio playback	Off		
	On				
	Hide image	Select/set	<i>Choose Image</i>		
		Deselect all?	No		
			Yes		
	Print set	Select/set	<i>Choose Image</i>		
		Deselect all?	No		
			Yes		
	Display mode	Done			
		Data			
		Histogram			
		Highlight			
		RGB histogram			
Focus area					
Image review	Off				
	On				
After delete	Show next				
	Show previous				
	Continue as before				
Rotate tall	Off				
	On				

D2Xs (Continued)

CAMR MENU (Continued)

Level 1	Level 2	Level 3	Level 4	Level 5	
SHOOTING MENU	Shooting menu bank	A			
		B			
		C			
		D			
		Rename			
	Reset shooting menu	No			
		Yes			
	Active folder	New			<i>Pick number</i>
		Select folder			<i>Choose folder</i>
	File naming	File naming			<i>Create name</i>
	Image quality	NEF(RAW) + JPEG fine			
		NEF(RAW) + JPEG normal			
		NEF(RAW) + JPEG basic			
		NEF (RAW)			
		TIFF (RGB)			
		JPEG fine			
		JPEG normal			
		JPEG basic			
	Image size	Large			
		Medium			
		Small			
	High speed crop	Off			
		On			
JPEG Compression	Size priority				
	Optimal quality				

D2Xs (Continued)

CAMR MENU (Continued)

Level 1	Level 2	Level 3	Level 4	Level 5		
SHOOTING MENU (Continued)	RAW Compression	Off NEF(RAW)				
		On Comp, NEF(RAW)				
	White balance	Auto				
		Incandescent				
		Fluorescent				
		Direct sunlight				
		Flash				
		Cloudy				
		Shade				
		Choose color temp				
	White balance preset			<i>Select preset</i>	Set	
					Edit comment	
					Select image	
					Copy d-0	
	Long exp. NR	Off				
		On				
	High ISO NR	On (normal)				
		On (high)				
		OFF				
	ISO sensitivity	<i>Select ISO</i>				
	Image Sharpening	Auto				
		Normal				
		Low				
Medium Low						
Medium High						
None						

D2Xs (Continued)

CAMR MENU (Continued)

Level 1	Level 2	Level 3	Level 4	Level 5	
SHOOTING MENU (Continued)	Tone compensation	Auto			
		Normal			
		Less contrast			
		More contrast			
		Custom 1			
		Custom 2			
		Custom 3			
	Color space	sRGB			
		Adobe RGB			
	Color mode	I			
		II			
		III			
		Black-and-white (sRGB)			
	Hue adjustment	<i>Select adjustment</i>			
	Image overlay	<i>Select images</i>			
	Multiple Exposure	Done			
		Number of shots			
		Auto gain			On
					Off
	Trim	<i>Select Image</i>			
	Intvl timer Shooting	Status			
Start		Now			
		Start time			
Current time					
Start time		<i>Adjust</i>			
Interval		Set Interval			

D2Xs (Continued)

CAMR MENU (Continued)

Level 1	Level 2	Level 3	Level 4	Level 5	
SHOOTING MENU (Concluded)	Intvl timer Shooting (Concluded)	Select intvl x no. of shots	Select no. of Intervals & shots		
		Remaining (Intvl x shots)	Off On		
	Non-CPU lens data	Focal length (mm)	N/A		
			6-45mm		
			50-180mm		
		Maximum aperture	Select aperture		
	CUSTOM SETTINGS MENU	Bank select	A		
B					
C					
D					
Rename					
Menu reset		No			
		Yes			
a Autofocus		a1 AF-C mode priority	fps rate		
			fps rate + AF		
			Focus		
		a2 AF-S mode priority	Focus		
			Release		
		a3 Group dynamic AF	Pattern 1		Center area
					Closest subject
			Pattern 2		Center area
		Closest subject			
a4 Lock-On	Long				
	Normal				
	Short				
	Off				

D2Xs (Continued)

CAMR MENU (Continued)

Level 1	Level 2	Level 3	Level 4	Level 5	
CUSTOM SETTINGS MENU (Continued)	a Autofocus (Concluded)	a5 AF activation	Shutter/AF-ON		
			AF-ON only		
		a6 Focus area illum	Manual focus mode		On
					Off
			Continuous mode		On
					Off
		When selected	9.2 s		
			1 s		
		a7 Focus area	No wrap		
			Wrap		
		a8 Vertical AF-ON	AF-ON+focus Area		
			AF-ON		
	AE/AF-L+Focus area				
	AE/AF-L				
	Focus area				
	b Metering/exposure	b1 ISO auto	Off		
			On		
			Max. sensitivity	200	
				400	
		800			
		Min. shutter speed	<i>Select shutter speed</i>		
			b2 ISO step value	1/3 step	
				1/2 step	
		1 step			
b3 EV step		1/3 step			
		1/2 step			
		1 step			
b4 Exposure comp. EV	1/3 step				
	1/2 step				
	1 step				

D2Xs (Continued)

CAMR MENU (Continued)

Level 1	Level 2	Level 3	Level 4	Level 5
CUSTOM SETTINGS MENU (Continued)	b Metering/exposure (Concluded)	b5 Exposure comp.	Off	
			On	
			On (auto reset)	
		b6 Center- weight	6mm	
			8mm	
			10mm	
			13mm	
			Average	
		b7 Fine tune exposure	No	
	Yes			
	c Timers/AE& AF lock	c1 AE lock	Off	
			On	
		c2 AE-L/AF-L	AF/AF lock	
			AE lock only	
			AE lock hold/ reset	
			AE lock hold	
			AF lock	
			AF-on	
		c3 Auto meter- off	4 s	
			6 s	
8 s				
16 s				
No limit				
c4 Self-timer	2 s			
	5 s			
	10 s			
	20 s			

D2Xs (Continued)

CAMR MENU (Continued)

Level 1	Level 2	Level 3	Level 4	Level 5	
CUSTOM SETTINGS MENU (Continued)	c Timers/AE& AF lock (Concluded)	c5 Monitor off	10 s		
			20 s		
			1 m		
			5 m		
			10 m		
	d Shooting/display	d1 Shooting speed	7 fps		
			6 fps		
			5 fps		
			4 fps		
			3 fps		
			2 fps		
			1 fps		
		d2 Maximum shots	Select shots		
		d3 Exp. delay mode	Off		
			On		
		d4 File no. seq.	Off		
			On		
			Reset		
		d5 Cntrl panel/ finder	Rear control panel		ISO sensitivity
					Exposures remaining
	Viewfinder display		Frame count		
	d6 Illumination	Lamp on switch			
		Any button			
	e Bracketing/flash	e1 Flash sync speed	Select speed		
			Select speed		
		e2 Flash shutter speed	On		
			Off		
e3 AA flash mode		On			
	Off				
e4 Modeling flash	On				
	Off				

D2Xs (Continued)

CAMR MENU (Continued)

Level 1	Level 2	Level 3	Level 4	Level 5
CUSTOM SETTINGS MENU (Continued)	e Bracketing/flash (Concluded)	e5 Auto BKT set	AE & flash	
			AE only	
			Flash only	
			WB bracketing	
		e6 Manual mode bkting	Flash/speed	
			Flash/speed/ aperture	
			Flash/aperture	
			Flash only	
		e7 Auto BKT order	MTR>under>over	
			Under>MTR>over	
		e8 Auto BKT selection	Manual value select	
			Preset value select	
	f Controls	f1 Center button	Shooting mode	Center AF area
				Illuminate AF area
				Not used
			Playback mode	Thumbnail on/off
				Histogram on/off
				Zoon on/off
		f2 Multi selector	Do nothing	
			Reset mtr-off delay	
			Initiate autofocus	
		f3 Photo info/playback	Off	
			On	
f4 FUNC. Button		None		
		FV lock		
		Same as AE-L/AF-L		
		Flash off		
		Bracketing burst		
	Matrix metering			
	Center-weighted			
	Spot metering			

D2Xs (Continued)



CAMR MENU (Concluded)




Level 1	Level 2	Level 3	Level 4	Level 5	
CUSTOM SETTINGS MENU (Concluded)	f Controls (Concluded)	f5 FUNC. + command	None		
			Hi-speed crop		
			1 step spd/aperture		
			Non-CPI lens data		
		f6 Command dials	Rotate direction		Normal
					Reverse
			Change main/sub		Off
					On
			Aperture setting		Sub-command dial
					Aperture ring
		f7 Buttons and dials	Menus and playback		Off
					On
			f8 No CF card?		
SET UP MENU	Audio Output	Via speaker	Select output level		
		Via video out			
		OFF			
	USB	Mass storage			
		PTP			
	Dust off ref photo	Start			
	Battery info				
	Wireless LAN				
	Image authentication	Off			
		On			
	Save/load settings	Save settings			
		Load settings			
	Firmware version				
RECENT SETTINGS	Select Setting				

D2Xs (Continued)

NOMINAL SETUP



D2Xs PROGRAM w/FLASH

Lens – as reqd
Aperture – Min, locked
Body Focus Mode – S
√Batt installed
√Flash Card installed
Pwr – ON
Top LCD
√Batt
√Frames remaining sufficient
Exp Comp () – 0.0
Exp Mode – P
Meter – Matrix ()
Diopter – Adjust
Frame Rate – S
√BKT disabled – 0 F
Rear LCD
√ISO – 100
√QUAL – RAW
√WB – 0,A
AF Area Mode – [[]]
√Focus Area – Center
√Focus Selector Lock – L

SB-800 Flash Settings
√Diffuser Dome installed
ON/OFF pb – ON
√MODE –   
√Exp Comp – 0 EV
Tilt – 45° (Direct)

D2Xs SHUTTER PRIORITY (EARTH OBS)



SB-800 Flash Settings
ON/OFF pb – OFF


Lens – as reqd
Aperture – Min, locked
Body Focus Mode – S
√Batt installed
√Flash Card installed
Pwr – ON
Top LCD
√Batt
√Frames remaining sufficient
Exp Comp () – 0.0
Exp Mode – S
SS – 500
Meter – Matrix ()
Diopter – Adjust
Frame Rate – S
√BKT disabled – 0 F
Rear LCD
√ISO – 100
√QUAL – RAW
√WB – 0,A
AF Area Mode – [[]]
√Focus Area – Center
√Focus Selector Lock – L

D2Xs (Continued)



NOMINAL SETUP (Continued)

D2Xs APERTURE PRIORITY

Lens – as reqd
Aperture – Min, locked
Body Focus Mode – S
√Batt installed
√Flash Card installed
Pwr – ON
Top LCD
√Batt
√Frames remaining sufficient
Exp Comp () – 0.0
Exp Mode – A
f/stop – as reqd
Meter – Matrix ()
Diopter – Adjust
Frame Rate – S
√BKT disabled – 0 F
Rear LCD
√ISO – 100
√QUAL – RAW
√WB – 0,A
AF Area Mode – [[]]
√Focus Area – Center
√Focus Selector Lock – L

SB-800 Flash Settings
√Diffuser Dome installed
ON/OFF pb – ON
√MODE –  TTL BL
√Exp Comp – 0 EV
Tilt – 45° (Direct)

D2Xs MANUAL




Lens – as reqd
Aperture – Min, locked
Body Focus Mode – S
√Batt installed
√Flash Card installed
Pwr – ON
Top LCD
√Batt
√Frames remaining sufficient
Exp Comp () – 0.0
Exp Mode – M
SS – as reqd
f/stop – as reqd
Meter – Matrix ()
Diopter – Adjust
Frame Rate – S
√BKT disabled – 0 F
Rear LCD
√ISO – 100
√QUAL – RAW
√WB – 0,A
AF Area Mode – [[]]
√Focus Area – Center
√Focus Selector Lock – L

SB-800 Flash Settings
ON/OFF pb – OFF

D2Xs (Continued)

NOMINAL SETUP (Continued)




D2Xs CREW PHOTO

- Lens – 17-35mm @ 17mm
- Lens Focus Mode – M/A
- Aperture – Min, locked
- Body Focus Mode – S
- √Batt installed
- √Flash Card installed
- Pwr – ON
- Top LCD
 - √Batt
 - √Frames remaining sufficient
- Exp Comp () – 0.0
- Exp Mode – A
- f/stop – f/8
- Meter – Matrix ()
- Diopter – Adjust
- Frame Rate – Selftimer
- √BKT disabled – 0 F
- Rear LCD
 - √ISO – 100
 - √QUAL – RAW
 - √WB – 0,A
- AF Area Mode – [[]]
- √Focus Area – Center
- √Focus Selector Lock – L
- SB-800 Flash Settings
 - √Diffuser Dome installed
 - ON/OFF pb – ON
 - √MODE –  TTL BL
 - √Exp Comp – 0 EV
 - Tilt – 45° (Direct)
- Accessory Equipment
 - Shutter Release Cable – Install
 - Multiuse Brkt – Install
 - Multiuse Brkt, Clamp – Install as reqd

Technique

1. Focus on crewmember
2. Body Focus Mode – M
3. Frame, Fire

D2Xs EXPOSURE MATCH

- Lens – 12-24mm @ 18mm
- Lens Focus Mode – M/A
- Aperture – Min, locked
- Body Focus Mode – S
- √Batt installed
- √Flash Card installed
- Pwr – ON
- Top LCD
 - √Batt
 - √Frames remaining sufficient
- Exp Comp () – 0.0
- Exp Mode – P
- Meter – Matrix ()
- Diopter – Adjust
- Frame Rate – S
- √BKT disabled – 0 F
- Rear LCD
 - √ISO – 100
 - √QUAL – RAW
 - √WB – 0,A
- AF Area Mode – [[]]
- √Focus Area – Center
- √Focus Selector Lock – L
- SB-800 Flash Settings
 - √Diffuser Dome installed
 - ON/OFF pb – ON
 - √MODE –  TTL BL
 - √Exp Comp – 0 EV
 - Tilt – 45° (Direct)

Technique for Single Shots

1. Fill FOV w/sunlit subject
2. Activate D2Xs Camr
3. Auto Exp Lock – Depress, hold
- Expect values such as 250,f/11
4. Focus, Frame, Fire

Technique for Multiple Shots



1. Fill FOV w/sunlit subject
2. Activate D2Xs Camr
3. Note SS,f/stop
4. Expect values such as 250,f/11
5. Exp Mode – M
- SS – as noted
- Aperture – as noted

D2Xs (Continued)

NOMINAL SETUP (Continued)

D2Xs AURORA/AIRGLOW

Lens – 28mm

- Lens Focus Mode – A
- Aperture – Min, locked
- Body Focus Mode – S
- √Batt installed
- √Flash Card installed
- Pwr – ON
- Top LCD
 - √Batt
 - √Frames remaining sufficient
- Exp Comp () – 0.0
- Exp Mode – M
- SS – 1”
- f/stop – f/1.4
- Meter – Matrix ()
- Diopter – Adjust
- √BKT disabled – 0 F
- Rear LCD
 - √ISO – 800
 - √QUAL – RAW
 - √WB – 0,A
- AF Area Mode – [[]]
- √Focus Area – Center
- √Focus Selector Lock – L

SB-800 Flash Settings



ON/OFF pb – OFF

Technique

1. Dim cabin lights
2. Use dark clothing to shield window
3. Focus, Frame, Fire

D2Xs CITY LIGHTS/STARS

Lens – 28mm

- Lens Focus Mode – A
- Aperture – Min, locked
- Body Focus Mode – S
- √Batt installed
- √Flash Card installed
- Pwr – ON
- Top LCD
 - √Batt
 - √Frames remaining sufficient
- Exp Comp () – 0.0
- Exp Mode – M
- SS – 4
- f/stop – f/1.4
- Meter – Matrix ()
- Diopter – Adjust
- √BKT disabled – 0 F
- Rear LCD
 - ISO – 800
 - √QUAL – RAW
 - √WB – 0,A
- AF Area Mode – [[]]
- √Focus Area – Center
- √Focus Selector Lock – L

SB-800 Flash Settings

ON/OFF pb – OFF

Accessory Equipment

Shutter Release Cable – Install
Multiuse Brkt, Clamp – Install

Technique



1. Dim cabin lights
2. Use dark clothing to shield window
3. Focus, Frame, Fire

D2Xs (Continued)

NOMINAL SETUP (Continued)

D2Xs LIGHTNING

Lens – 28mm

- Lens Focus Mode – A
- Aperture – Min, locked
- Body Focus Mode – S
- √Batt installed
- √Flash Card installed
- Pwr – ON
- Top LCD
 - √Batt
 - √Frames remaining sufficient
- Exp Comp () – 0.0
- Exp Mode – M
- SS – 2”
- f/stop – f/1.4
- Meter – Matrix ()
- Diopter – Adjust
- Frame Rate – S
- √BKT disabled – 0 F
- Rear LCD
 - ISO – 400
 - √QUAL – RAW
 - √WB – 0,A
- AF Area Mode – [[]]
- √Focus Area – Center
- √Focus Selector Lock – L

SB-800 Flash Settings
ON/OFF pb – OFF



Accessory Equipment

- Shutter Release Cable – Install
- Multiuse Brkt, Clamp – Install as reqd

Technique

1. Fire Camr repeatedly. Luck reqd

D2Xs MOON



- Lens – as reqd
- Aperture – Min, locked
- Body Focus Mode – S
- √Batt installed
- √Flash Card installed
- Pwr – ON
- Top LCD
 - √Batt
 - √Frames remaining sufficient
- Exp Comp () – 0.0
- Exp Mode – M
- SS – 500
- f/stop – f/8
- Meter – Matrix ()
- Diopter – Adjust
- Frame Rate – S
- √BKT disabled – 0 F
- Rear LCD
 - √ISO – 100
 - √QUAL – RAW
 - √WB – 0,A
- AF Area Mode – [[]]
- √Focus Area – Center
- √Focus Selector Lock – L

SB-800 Flash Settings
ON/OFF pb – OFF

D2Xs (Continued)

NOMINAL SETUP (Continued)

D2Xs SILHOUETTE

- Lens – as reqd
- Aperture – Min, locked
- Body Focus Mode – S
- √Batt installed
- √Flash Card installed
- Pwr – ON
- Top LCD
 - √Batt
 - √Frames remaining sufficient
- Exp Comp () – 0.0
- Exp Mode – P
- Meter – Matrix ()
- Diopter – Adjust
- Frame Rate – S
- √BKT disabled – 0 F
- Rear LCD
 - √ISO – 100
 - √QUAL – RAW
 - √WB – 0,A
- AF Area Mode – [[]]
- √Focus Area – Center
- √Focus Selector Lock – L



SB-800 Flash Settings
ON/OFF pb – OFF

Technique

1. Fill FOV w/sunlit subject
2. Activate D2XS Camr
3. **Auto Exp Lock – Depress,hold**
Expect values such as 250,f/11
4. Focus, Frame, Fire

D2Xs SUNRISE/SUNSET

WARNING
DO NOT LOOK AT SUN

- Lens – as reqd
- Aperture – Min, locked
- Body Focus Mode – S
- √Batt installed
- √Flash Card installed
- Pwr – ON
- Top LCD
 - √Batt
 - √Frames remaining sufficient
- Exp Comp () – 0.0
- Exp Mode – P
- Meter – Matrix ()
- Diopter – Adjust
- √BKT disabled – 0 F
- Rear LCD
 - √ISO – 400**
 - √QUAL – RAW
 - √WB – 0,A
- AF Area Mode – [[]]
- √Focus Area – Center
- √Focus Selector Lock – L

SB-800 Flash Settings
ON/OFF pb – OFF



Technique

1. Focus, Frame, Fire

D2Xs (Continued)

NOMINAL SETUP (Concluded)

D2Xs SUN STAR EFFECT



Lens – 10.5mm
Aperture – Min, locked
Body Focus Mode – S
√Batt installed
√Flash Card installed
Pwr – ON
Top LCD
√Batt
√Frames remaining sufficient
Exp Comp () – 0.0
Exp Mode – A
f/stop – f/22
Meter – Matrix ()
Diopter – Adjust
Frame Rate – S
√BKT disabled – 0 F
Rear LCD
√ISO – 100
√QUAL – RAW
√WB – 0,A
AF Area Mode – [[]]
√Focus Area – Center
√Focus Selector Lock – L

SB-800 Flash Settings
ON/OFF pb – OFF

Technique

1. Place Sun w/Earth, orbiter, crewmember, etc. in FOV

D2Xs TV MONITOR

Lens – as reqd
Aperture – Min, locked
Body Focus Mode – S
√Batt installed
√Flash Card installed
Pwr – ON
Top LCD
√Batt
√Frames remaining sufficient
Exp Comp () – 0.0
Exp Mode – S
SS – 30
Meter – Matrix ()
Diopter – Adjust
Frame Rate – S
√BKT disabled – 0 F
Rear LCD
√ISO – 100
√QUAL – RAW
√WB – 0,A
AF Area Mode – [[]]
√Focus Area – Center
√Focus Selector Lock – L

SB-800 Flash Settings
ON/OFF pb – OFF

D2Xs (Continued)


SB-800 REMOTE FLASH

OBJECTIVE:

To set up off-Camera Flash(es) to be used as Remote Flash. Procedure can be used to set up more than one Remote Flash at a time.

1. SETTING UP OFF-CAMERA REMOTE FLASH

SB-800
Remote
Flash

- 1.1 pb ON/OFF → ON
- 1.2 pb SEL → Press, hold until custom settings appear
- 1.3 Navigate Pad
sel '' [pb SEL → Press (to select)]
- 1.4 Navigate Pad +/-
sel '**REMOTE**' [pb SEL → Press (to select)]
- 1.5 pb ON/OFF → Press (to exit custom settings)
- 1.6 √'**CH1**'

If CH not 1 then;
| pb SEL → Press (cycle until CH selected)
| Navigate Pad +/-
| sel '1'

D2Xs (Continued)

SB-800 REMOTE FLASH (Continued)

1.7 [Setting Remote Flash to Desired Group](#)

NOTE

Up to three groups of remote flashes may be set up. Remote flashes may be set up in group A, B, or C.

1.7.1 pb SEL → Press (cycle until GROUP selected)

1.7.2 Navigate Pad +/-
sel Desired group

1.8 Zoom – As desired

1.9 Adjust tilt and rotation so Remote Flash sensor will pick up light from Master Flash and place Remote Flash where desired.

1.10 As required for additional Remote Flashes, repeat steps [1.1](#) to [1.9](#).

2. [CONFIGURING CAMERA](#)
D2Xs Camera Configure Camera as desired.


D2Xs (Continued)

SB-800 REMOTE FLASH (Continued)

3. [SETTING UP ON-CAMERA FLASH AS MASTER](#)

SB-800 On-Camera Flash

- 3.1 pb ON/OFF → ON
- 3.2 pb SEL → Press, hold until custom settings appears
- 3.3 Navigate Pad

sel '  ' [pb SEL → Press (to select)]

- 3.4 Navigate Pad +/-
sel '**MASTER**' [pb SEL → Press (to select)]
- 3.5 pb ON/OFF → Press (to exit custom settings)

4. [CONTROLLING FLASHES VIA THE MASTER FLASH \(ON CAMERA FLASH\)](#)

4.1 √'**CH1**'

If CH not 1; then,
| pb SEL → Press (cycle until CH selected)
| Navigate Pad +/-
| sel '**1**'

4.2 [Setting Mode and Exposure for Flashes](#)

- 4.2.1 pb SEL → Press [cycle until desired flash group (M, A, B, C) is selected]

D2Xs (Continued)

SB-800 REMOTE FLASH (Continued)

4.2.2 pb MODE → Press (to select desired Mode)

NOTE

1. Set Mode to 'TTL' to turn Flash on.
2. Set Mode to '---' to turn Flash off.

4.2.3 Navigate Pad +/-
Adjust exposure as desired.

4.2.4 Repeat steps [4.2.1](#) to [4.2.3](#) for additional flashes.

NOTE

Flash must be on Camera prior to checking zoom.

4.2.5 If no Diffuser Dome
√Zoom – Auto (No 'M' displayed above 'Zoom')


D2Xs (Continued)

SB-800 REMOTE FLASH (Concluded)

5. DECONFIGURATION

SB-800 Flash 5.1 pb SEL → Press, hold until custom settings appears

5.2 Navigate Pad


sel ' [pb SEL → Press (to select)]

5.3 Navigate Pad
sel '**OFF**' [pb SEL → Press (to select)]

5.4 pb ON/OFF → Press (to exit custom settings)



5.5 Repeat steps [5.1](#) to [5.4](#) for all Flashes.

DATE/TIME SET





1. MENU pb – press
2. Navigate pad – sel Menu icon  setup menu
 - press (right)
 - sel WORLD TIME (up,down)
 - press (right)
 - sel DATE (up,down)
 - press (right)
3. Set DATE/TIME to GMT
 - Navigate pad – sel desired field (left,right)
 - sel desired setting (up,down)
4. ENTER pb – press
5. MENU pb – press twice

D2Xs (Continued)




DELETING SINGLE IMAGES

1. PLAYBACK  pb – press
2. Navigate pad – sel image (up,down)
3. DELETE  pb – press twice to delete




ADDING .WAV FILES TO AN IMAGE

1. PLAYBACK  pb – press
2. Navigate pad – sel image (up,down)
3. MICROPHONE  pb – press, hold (✓microphone icon  appears on rear LCD)
4. Talk to MIC
5. ✓Music Note icon  appears in upper left image

DELETING .WAV FILE FROM AN IMAGE

1. PLAYBACK  pb – press
2. Navigate pad – sel image (up,down)
3. DELETE  pb – press
4. Sel – Sound only
5. DELETE  pb – press

.WAV FILE PLAYBACK

1. PLAYBACK  pb – press
2. Navigate pad – sel image w/music note 
3. MICROPHONE  pb – press

D2Xs (Continued)

IMAGE FILE TRANSFER

DNLK FROM FLASH CARD

1. Insert Flash Card w/PCMCIA Adapter into **KFX PGSC**(any **networked PGSC**), brand name up
2. Inform MCC "files ready"

DCS FILE TO HARD DRIVE

1. Insert Flash Card w/PCMCIA Adapter into any **networked PGSC**, brand name up
2. Double click:
 - "My Computer" icon on desktop
 - "Removable Disk D" or appropriate drive
 - Folder "DCIM" or appropriate folder
 - Folder "100 ND2XS"
3. Select all files
4. Copy all files
5. Double click:
 - "Imagery Folder on KFX PGSC" shortcut on desktop
 - Appropriate subfolder (e.g., FD1, OMS Pod, etc.)
6. Paste files
7. Close all windows
8. Inform MCC "files ready" on PGSC
9. Stow card

D2Xs (Continued)

RECOVER LOST IMAGES

1. Insert suspect Flash Card into A31p, brand name up
2. Open SHUTTLE APPS | Photo Processing | mediaRECOVER
3. In 'mediaRECOVER' window
 - Sel 'Settings' in left-hand column
 - Under 'My image file size', move slider until '10.00 MB' displayed
 - Sel 'Recovery' in left-hand column
 - In 'Drive to recover' column, sel 'Removable Disk' in pulldown menu
 - Sel 'Next >'
4. In 'Where do you want to save recovered files?' column
 - Sel '...' button
 - In 'Choose directory...' window
 - Sel 'Local Disk (C)'
 - Sel 'OCA-down'
 - Sel 'Imagery'
 - Sel 'New Folder' option button
 - Type 'Recover' as new folder name
 - Press Enter
 - Click on 'Recover' folder
 - Sel 'OK'
 - Sel 'Next >'
5. In 'Progress' column
 - √'Preview' box
 - Sel 'Start'
6. In 'Analyze Drive' window

NOTE

Scan will take several min (~45 min)

Sel 'Use folder based recover'
Verify '√' in box next to 'Look for additional lost files'
Sel 'Continue'

D2Xs (Concluded)

RECOVER LOST IMAGES (Concluded)

7. When 'Preview' window appears, move 'Preview' window below 'mediaRECOVER' window to view progress bar

NOTE

When scan completed, 'Save Images' window will appear

8. In 'Save Images' window

NOTE

May take several minutes to save to 'Recover' folder

√All images have '√' in their select box

Sel 'Save Images'

9. When finished saving ('Save Images' window will automatically close), close 'mediaRECOVER' window
10. Close 'Photo Processing' window
11. Notify MCC regarding location of images

This Page Intentionally Blank

D2Xs EVA CAMR

	<u>PAGE</u>
SPECIFICATIONS.....	5-2
LENS DATA.....	5-3
NOMENCLATURE.....	5-4
D2XS EVA – CAMR ONLY.....	5-5
D2XS EVA – CAMR ONLY DISASSEMBLY	5-9
BETWEEN EVAS.....	5-9
POST-EVA.....	5-10
D2XS EVA – CAMR W/FLASH.....	5-11
D2XS EVA – CAMR W/FLASH DISASSEMBLY	5-19
BETWEEN EVAs	5-19
POST-EVA.....	5-20
DATE/TIME SET.....	5-22
D2XS FORMAT	5-22
STEREO PHOTOGRAMMETRY PROCEDURE.....	5-23

D2Xs EVA CAMR

SPECIFICATIONS

CAMR BODY

CMOS SENSOR SIZE: 15.7mm x 23.7mm

PIXEL COUNT: 4288 x 2848

DISK/FRAME: 1 GB, ~90 frames; 4 GB, ~360 frames

RAW FILE SIZE: ~10 MB

EXPOSURE CONTROL: Auto (program, shutter priority, aperture priority), Manual

METER PATTERN: 3D Color Matrix, Center Weighted, Spot

EXPOSURE COMP: ± 5 in 1, 1/3, 1/2 EV steps

SHUTTER:

Program & Aperture Priority – 1/8000 thru 30 sec (virtually stepless)

Manual & Shutter Priority – 1/8000 thru 30 sec (1, 1/3, 1/2) stop increments), 250x, and Bulb (manual only)

ISO Setting: 100-3200; >800 controlled by menu

FRAME RATE: Single, C_L – 3 fps, C_H – 5 fps

Burst Rate: Mode dependent

CAMR BATT: Li-ION EN-EL4A

CAMR BATT VOLTAGE: 11.1VDC

CAMR BATT LIFETIME: ~1000 frames

CAMR WEIGHT: 2.4 lb (w/Batt & Memory Card)

I

D2Xs EVA CAMR (Continued)

LENS DATA


NOTE

Do not use non-EVA lens w/D2Xs EVA

Lens	Aperture Range (f/stop)	Approximate Field of View (FOV)			Approx Minimum Focus Distance (ft)	Weight (lb)	Filter Size	M-A Switch
		Horizontal	Vertical	Diagonal				
28mm AF	f/2.8-f/22	46°	31°	54°	1.25	0.46	52mm	
35mm AF	f/2.0-f/22	37°	25°	44°	0.9	0.51	52mm	
50mm AFD	f/1.4-f/16	27°	18°	32°	1.5	0.59	52mm	
70-200mm AF	f/2.8-f/22	19°-7°	13°-4.5°	23°-8°	6.0	2.98	77mm	Yes
85mm AF	f/1.4-f/16	16°	11°	19°	2.8	1.23	77mm	Yes
105mm AF	f/2.8-f/32	13°	9°	15°	1.0	1.22	52mm	Yes
180mm AFD	f/2.8-f/22	7°	5°	9°	5.0	1.72	72mm	Yes

D2Xs EVA CAMR (Continued)

NOMENCLATURE

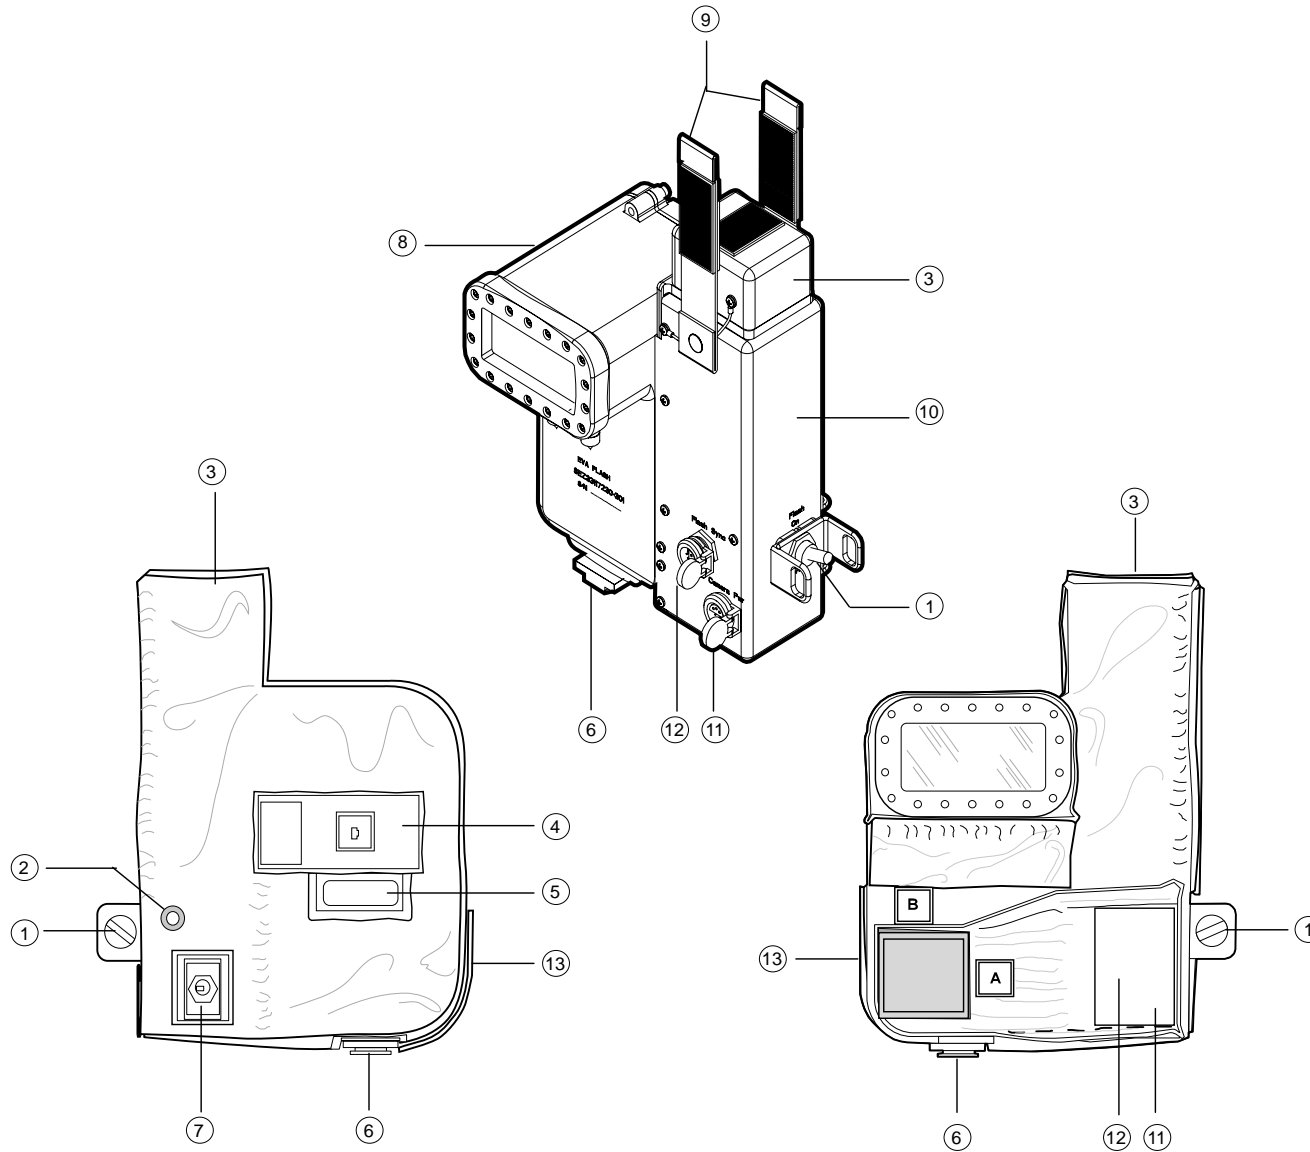

- ① Flash Pwr sw
- ② External Camr Batt Low Light/LED
- ③ Batt Cap
- ④ Rear Flash Display Window
- ⑤ Flash Ready Lt Window
- ⑥ Flash Mount Rail
- ⑦ Camr Batt Pwr sw
- ⑧ Flash Housing
- ⑨ Batt Cap Straps
- ⑩ Batt Housing
- ⑪ External Camr Pwr Port
- ⑫ Flash Sync Port
- ⑬ Flap F

jsc48037_175r1.cvx

D2Xs EVA CAMR (Continued)

D2XS EVA – CAMR ONLY

NOTE



When Camr not in use during EVA, Thermal Lens Cap must be installed

1. Unstow,assemble
D2Xs Camr
Lens – as reqd
If 28(35,50,105)mm EVA Lens:
√Circular Polar 52mm Filter w/o glass fully installed on lens

D2Xs Batt – fully charged
4 GB EVA Flash Card



2. Unstow but do not install
EVA Camr Blanket
Camr Mounting Assy w/Thermal Blanket and Tether
EVA Eyepiece w/Thermal Wrap,Tether

D2Xs

3. Camr Settings
Lens – as reqd
Aperture – Min, locked
Body Focus Mode – S
√Batt installed
√Flash Card installed
Pwr – ON
Top LCD
√Batt
√Frame count = 1
If >1, perform D2Xs FORMAT, 5-22
Exp Comp () – 0.0
Exp Mode – P
Meter – Matrix ()
Diopter – Full ccw
Frame Rate – S
√BKT disabled – 0 F

D2Xs EVA CAMR (Continued)

D2XS EVA – CAMR ONLY (Continued)

- D2Xs
3. Camr Settings (Concluded)
 - Rear LCD
 - √ISO – 100
 - √QUAL – RAW
 - √WB – 0,A
 - AF Area Mode – [[]]
 - √Focus Area – Center
 - √Focus Selector Lock – L
 - √Vertical Shooting Shutter Release Lock – L (L to white line) |
 - Menu Settings:
 - Menu pb – press
 - Navigate Pad sel – Playback Menu  > Image Review
 - OFF
 - Setup Menu  > Worldtime
 - √Date/Time set to GMT |
 - If reqd to set, perform DATE/TIME SET, 5-22
 4. Close Eyepiece shutter
 5. Remove IVA Eyepiece
 6. Open Eyepiece shutter
 7. Install EVA Camr Blanket starting at top of Camr
 8. √Lens Cap removed from Lens
 9. Activate Shutter Release:
 - √No “_FEE” in Viewfinder
 - If “_FEE” displayed:
 - Remove Lens
 - Aperture – Min, locked
 - Replace Lens
 - √Lens moves freely under EVA Camr Blanket
 10. Install 28mm, 35mm, 50mm Lens Cap (Thermal Cap)
 11. Install EVA Eyepiece

D2Xs EVA CAMR (Continued)

D2XS EVA – CAMR ONLY (Continued)

12. Thread Eyepiece Tether thru Hot Shoe openings on Camr Thermal Blanket
Close Hot Shoe Cover



13. Loop Thermal Wrap thru Tether



14. Wrap Thermal Wrap around Eyepiece



D2Xs EVA CAMR (Continued)

D2XS EVA – CAMR ONLY (Concluded)

15. Install Camr Mounting Assy w/Thermal Blanket from rear
16. ✓Camr Mounting Assy seated, will not slip off Camr. Release pb – out
17. Connect French Hook to D-Ring on left side of Camr



FINAL CONFIGURATION

18. Stow Camr until day of EVA
- If Remote Cord Assy used:
19. Connect Remote Cord Assy to Remote Release Port on D2Xs Camr (Connector will thread into place)



20. ✓Remote Cord Assy not locked
21. Remove 28mm, 35mm, 50mm Lens Cap (Thermal Cap)
22. Test fire D2Xs w/Remote Release (two shots)
23. Install 28mm, 35mm, 50mm Lens Cap (Thermal Cap)
24. Stow until day of EVA

D2Xs EVA CAMR (Continued)

D2XS EVA – CAMR ONLY DISASSEMBLY

BETWEEN EVAs

NOTE

Removal of Batt, Card and Camr turnaround main objectives

D2Xs

1. Disconnect Tether from D-Ring
2. Detach Camr Mounting Assy from D2Xs Camr
3. Lift back EVA Camr Blanket to access Batt, Card compartments
4. Remove, replace:
 - D2Xs Batt
 - 4 GB EVA Flash Card
5. Re-install Camr Blanket
6. Install Camr Mounting Assy w/ Thermal Blanket from rear
7. ✓ Camr Mounting Assy seated, will not slip off Camr. Release pb – out
8. Connect French Hook to D-Ring on left side of Camr



FINAL CONFIGURATION

9. Stow Camr until day of EVA

D2Xs EVA CAMR (Continued)

D2XS EVA – CAMR ONLY DISASSEMBLY (Concluded)


POST-EVA

NOTE

Removal of Batt, Card and stowing of EVA H/W and IVA use of D2Xs main objectives

1. Disconnect Tether from D-Ring
2. Detach Camr Mounting Assy and Thermal Wrap from D2Xs Camr
3. Disconnect Eyepiece Tether
4. Close Eyepiece shutter
5. Remove:
 - EVA Eyepiece
 - EVA Camr Blanket
 - D2Xs Batt
 - 4 GB EVA Flash Card
6. Replace IVA Eyepiece
7. Open Eyepiece shutter

If reqd:

8. Return Camr to Nominal Ops
 - Replace D2Xs Batt and 4 GB EVA Flash Card
 - Menu Settings:
 - MENU pb – press
 - Navigate Pad sel – Playback Menu  > Image Review
 - ON
 - press twice
 - Camr Pwr – OFF

D2Xs EVA CAMR (Continued)

D2XS EVA – CAMR W/FLASH

NOTE

When Camr not in use during EVA, Thermal Lens Cap must be installed

1. Unstow, Install
D2Xs Camr
Lens – As Reqd
If 28(35,50,105)mm EVA Lens:
√Circular Polar 52mm Filter w/o glass fully installed on lens

D2Xs Batt – fully charged
4 GB EVA Flash Card





2. Unstow but do not install
EVA Camr Blanket
Camr Mounting Assy w/Thermal Blanket and Tether
EVA Eyepiece w/Thermal Wrap and Tether
Bracket Assy w/Thermal Blanket
EVA Flash w/Thermal Blanket
Flash Sync Cable Assy w/Thermal Blanket
Remote Cord Assy (SED33112525-302)

D2Xs

3. Camr Settings
Lens – as reqd
Aperture – Min, locked
Body Focus Mode – S
√Batt installed
√Flash Card installed
Pwr – ON

D2Xs EVA CAMR (Continued)

D2XS EVA – CAMR W/FLASH (Continued)

- D2Xs
3. Camr Settings (Concluded)
 - Top LCD
 - √Batt
 - √Frame count = 1
 - If >1, perform D2Xs FORMAT, 5-22
 - Exp Comp () – 0.0
 - Exp Mode – P
 - Meter – Matrix ()
 - Diopter – Adjust
 - Frame Rate – S
 - √BKT disabled – 0 F
 - Rear LCD
 - √ISO – 100
 - √QUAL – RAW
 - √WB – 0,A
 - AF Area Mode – [[]]
 - √Focus Area – Center
 - √Focus Selector Lock – L
 - √Vertical Shooting Release Lock – L (L to white line)
 - Menu Settings:
 - Menu pb – press
 - Navigate Pad sel – Playback Menu  > Image Review
 - OFF
 - Setup Menu  > Worldtime
 - √Date/Time set to GMT
 - If reqd to set, perform DATE/TIME SET, 5-22
 4. Close Eyepiece shutter
 5. Remove IVA Eyepiece
 6. Open Eyepiece shutter
 7. Install EVA Camr Blanket starting at top of Camr
 8. √Lens Cap removed from Lens
 9. Activate Shutter Release:
 - √No “_FEE” in Viewfinder
 - If “_FEE” displayed:
 - Remove Lens
 - Aperture – Min, locked
 - Replace Lens
 - √Lens moves freely under EVA Camr Blanket

D2Xs EVA CAMR (Continued)

D2Xs EVA – CAMR w/FLASH (Continued)

10. Install 28mm, 35mm, 50mm Lens Cap (Thermal Cap)
11. Install EVA Eyepiece
12. Thread Eyepiece Tether thru Hot Shoe openings on Camr Thermal Blanket



13. Loop Thermal Wrap thru Tether




14. Wrap Thermal Wrap around Eyepiece



D2Xs EVA CAMR (Continued)


D2Xs EVA – CAMR w/FLASH (Continued)

- Brkt Assy
15. Obtain Bracket Assy w/Thermal Blanket
If Thermal Blanket not installed, install on Bracket Assy
 16. Insert Remote Cord Assy thru hole in Thermal Blanket (verify Remote Cord Assy not locked) and place lip of remote under Thermal Blanket

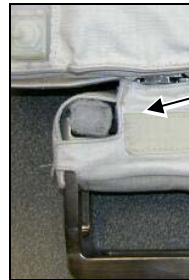

Remote Cord Lip

- D2Xs
17. Remove Flash Sync Cover from Flash Sync Cable
 18. Install Flash Sync Cable to Camr Hot Shoe:
Lock Flash Sync Cable – turn lever cw
Secure Camr Hot Shoe Flap to EVA Camr Blanket
 19. Reinstall Flash Sync Cover onto Flash Sync Cable Assy
 20. Install D2Xs Camr onto Bracket Assy (from front)
 21. Install EVA Flash onto Bracket Assy (from rear)

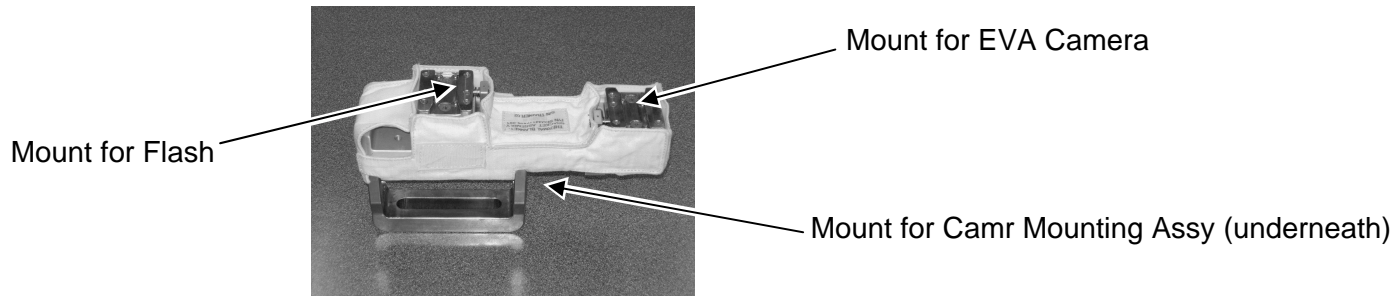

D2Xs EVA CAMR (Continued)

D2XS EVA – CAMR W/FLASH (Continued)

22. Install Camr Mounting Assy w/Thermal Blanket to Bracket Assy (from rear)
23. ✓D2Xs Camr, EVA Flash, and Camr Mounting Assy seated, will not slip off Bracket Assy. Release pb – out
24. Connect French Hook to D-Ring on left side of Camr

- EVA Flash
25. Open Flaps A,B,F
 26. Under Flap B, tuck excess Remote Cord Assy (three coils) into pocket on EVA Flash unit
 27. Close Flap B using two snaps



(Remote Cord Coil)

28. Connect Remote Cord Assy to Remote Release Port on D2Xs Camr (Connector will thread into place)

NOTE

Adjustments to cables may be reqd during installation

- D2Xs
29. Connect Flash Sync Cable Assy to Flash Sync Port on EVA Flash



Sync Port

Ext Camr Pwr Port (not used)

D2Xs EVA CAMR (Continued)

D2XS EVA – CAMR W/FLASH (Continued)

30. Close Flap A over Flash Sync Cable Assy, secure w/Velcro




31. Secure Flash Sync Cable and Remote Cord Assy under Flap F on right side of Flash



- EVA Flash
32. Access Flash Batt Compartment (remove Flap(s) C as reqd)
 33. Remove Batt Cap
 34. Install one DCS 760 Batt into FLASH slot (align arrows)
 35. Reinstall Batt Cap
 36. Flash – ON
 37. Activate Camr

D2Xs EVA CAMR (Continued)

D2XS EVA – CAMR W/FLASH (Continued)

38. Open Flap D; verify following:
√Mode – 
√Zoom – “M” not displayed
If “M” displayed, contact MCC
- D2Xs 39. Remove 28mm, 35mm, 50mm Lens Cap (Thermal Cap)
40. Test fire Camr w/Flash using Remote Release (two shots)
41. √Flash fired
- EVA Flash 42. Flash – OFF
43. Close Flap D
44. Remove DCS 760 Batt from FLASH slot
- D2Xs 45. Install 28mm, 35mm, 50mm Lens Cap (Thermal Cap)
46. Stow until day of EVA



PRIOR TO ENTERING AIRLOCK:


If Camr only:

1. Remove 28mm, 35mm, 50mm Lens Cap (Thermal Cap)
2. Activate Shutter Release:
√No “fEE” in Viewfinder
If “fEE” displayed:
Remove Lens
Aperture – Min, locked
Replace Lens
3. Test fire Camr
4. Install 28mm, 35mm, 50mm Lens Cap

D2Xs EVA CAMR (Continued)

D2XS EVA – CAMR W/FLASH (Concluded)

PRIOR TO ENTERING AIRLOCK; (Concluded)

- EVA Flash
- ~
|
If Camr w/Flash:
5. Remove Batt Cap
 6. Install DCS 760 Batt into Flash slot (align arrows)
 7. Reinstall Batt Cap
 8. Flash – ON
 9. Activate Camr
 10. Open Flap D; verify following:
 - √Mode – 
 - √Zoom – “M” not displayed
If “M” displayed, contact MCC
 11. Remove 28mm, 35mm, 50mm Lens Cap (Thermal Cap)
 12. Test fire Camr w/Flash
 13. Install 28mm, 35mm, 50mm Lens Cap (Thermal Cap)
 14. Flash – OFF
 15. Close Flap D
 16. Close Flap C



D2Xs EVA CAMR (Continued)

D2XS EVA – CAMR W/FLASH DISASSEMBLY

BETWEEN EVAS

NOTE

Removal of Batts,Cards main objective

FLASH

1. Flash – OFF
2. Open Flap C to access Flash Batt compartment
3. Remove Batt Cap
4. Remove DCS 760 Batt
5. Install Batt Cap
6. Close Flap C

CAMR

1. Disconnect Remote Cord Assy from D2Xs Camr
2. Disconnect Flash Sync Cable Assy from Camr Hot Shoe:
Unlock Flash Sync Cable Assy – turn ccw
3. Disconnect French Hook from D-Ring
4. Detach D2Xs Camr from Bracket Assy
5. Lift back EVA Camr Blanket to access Batt,card components
6. Remove,replace:
D2Xs Batt
4GB EVA Flash Card
7. Re-install Camr Blanket
8. Install D2Xs Camr onto Bracket Assy (from front)
9. √D2Xs Camr, EVA Flash, and Camr Mounting Assy seated, will not slip off Bracket Assy. Release pb – out
10. Connect French Hook to D-Ring on left side of Camr
11. Connect Remote Cord Assy to Remote Release Port on D2Xs Camr (Connector will thread into place)

NOTE

Adjustments to cables may be reqd during installation

12. Connect Flash Sync Cable Assy to Camr Hot Shoe
13. Lock Flash Sync Cable – turn lever cw
14. Re-install Flash Sync Cover onto Flash Sync Cable Assy
15. Stow until day of EVA

D2Xs EVA CAMR (Continued)

D2XS EVA – CAMR W/FLASH DISASSEMBLY (Continued)

POST-EVA

NOTE

Stowing of EVA H/W and IVA use of D2Xs main objective

CAMR W/FLASH

1. Disconnect Remote Cord Assy from D2Xs Camr
2. Disconnect Flash Sync Cable Assy from Camr Hot Shoe:
Unlock Flash Sync Cable Assy – turn ccw
3. Disconnect French Hook from D-Ring
4. Detach Camr Mount,D2Xs Camr from Bracket Assy

CAMR

NOTE

Eyepiece shutter must be closed in order to remove Eyepiece

1. Disconnect Eyepiece Tether from Camr
2. Close Eyepiece Shutter
3. Remove:
EVA Eyepiece
EVA Camr Blanket
D2Xs Batt
4 GB EVA Flash Card
4. Replace IVA Eyepiece
5. Open Eyepiece shutter

D2Xs EVA CAMR (Continued)


D2XS EVA – CAMR W/FLASH DISASSEMBLY (Concluded)

POST-EVA (Concluded)

EVA FLASH AND FLASH BRACKET

1. Flash – OFF
2. Open Flap C to access Flash Batt compartment
3. Open Batt Cap and remove DCS 760 Batt
4. Secure Batt Cap
5. Close Flap C
6. Open Flaps A,B,F
7. Disconnect Flash Sync Cable Assy from Flash
8. Remove Remote Cord Assy, Flash Sync Cable from Flap B
9. Close Flaps A,B,F
10. Remove EVA Flash from Bracket Assy
11. Remove Remote Cord Assy from Thermal Blanket
12. Stow all EVA H/W as reqd

RETURN CAMR TO NOM OPS (AS REQD)

1. Replace D2Xs Batt and 4 GB EVA Flash Card
2. Camr Settings:
 - Camr Pwr sw – ON
 - Menu Settings:
 - MENU pb – press
 - Navigate Pad sel – Playback Menu  > Image Review
 - ON
 - MENU pb – press twice
 - Nom Ops settings
3. Camr Pwr – OFF

D2Xs EVA CAMR (Continued)

DATE/TIME SET

1. MENU pb – press
2. Navigate pad – sel SET UP Menu icon **Y**
 - press (right)
 - sel World time (up,down)
 - press (right)
 - sel DATE (up,down)
 - press (right)
3. Set TIME/DATE to GMT
 - Navigate pad – sel desired field (left,right)
 - sel desired setting (up,down)
4. ENTER pb – press
5. MENU pb – press twice

D2XS FORMAT

1. Pwr – ON
2. MENU pb – press
3. Navigate pad – sel SET UP MENU **Y**
 - sel 'Format'
 - sel 'Yes'
4. ENTER pb – press
5. 'Formatting'
6. 'Done'
7. MENU pb – press twice

D2Xs EVA CAMR (Concluded)


STEREO PHOTOGRAMMETRY PROCEDURE

CAMR SETTINGS – ACTIVATION

1. Rcd CAMR and LENS S/Ns
2. Perform EVA – CAMR ONLY (CAMR w/BRACKET ONLY, CAMR w/FLASH)
3. Install Lens – 35mm(28mm) EVA
Exp Mode – P
Flash Settings:
ON/OFF – OFF

TECHNIQUE

1. Distance to subject: 5-7 ft
2. Take mapping images normal to surface, followed by one additional convergent view on each side
3. Shoot photos in pairs. Offset each image laterally 2 in/ft of subject distance, ~10-14 in
4. An additional row of photos may be taken at a 90-60 deg angle to surface to capture critical details not covered in previous images
5. Repeat as time permits

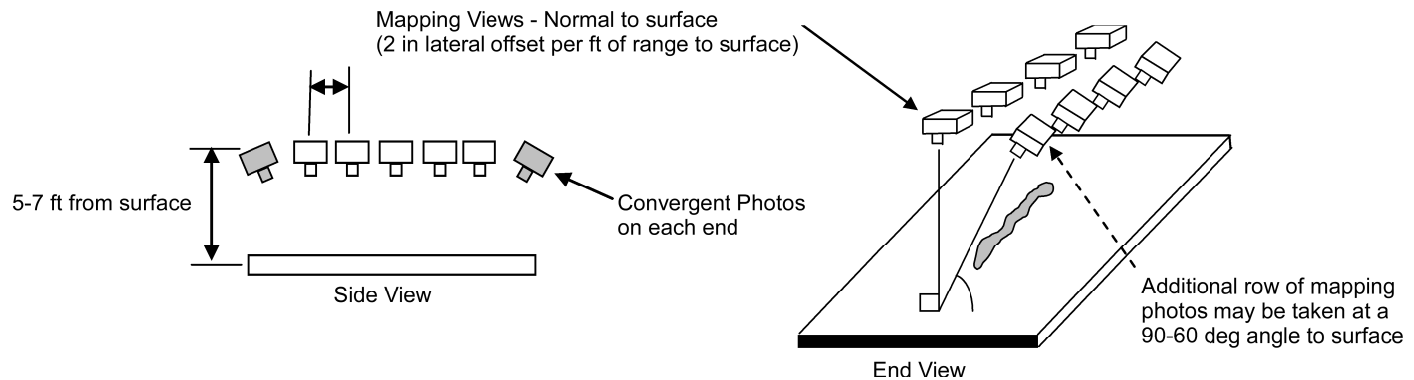

This Page Intentionally Blank

EVA IR CAMR

	<u>PAGE</u>
SPECIFICATIONS.....	6-3
NOMENCLATURE.....	6-4
CAMR SETUP.....	6-8
IR CAMR BRACKET ASSEMBLY.....	6-8
NOMINAL MENU SETTINGS.....	6-9
MOVIE RECORDING.....	6-10
MOVIE PLAYBACK.....	6-10
DOWNLINKING FILES.....	6-10
DELETING FILES.....	6-10
DELETE SINGLE FILES ON CF CARD.....	6-10
DELETE ALL FILES ON CF CARD.....	6-10
LEVEL/SPAN MODES.....	6-11
MANUAL ADJUST MODE.....	6-11
CONTINUOUS ADJUST MODE.....	6-11
DATE/TIME SET.....	6-11
SELECTING DIFFERENT PALETTES.....	6-11
RESET TO NASA PROFILE.....	6-11
DEACTIVATION.....	6-11
MALS.....	6-12
6.1 NO LCD PWR/DISPLAY.....	6-12
6.2 RCU pbs NOT RESPONDING.....	6-13
6.3 BATT LED NOT SOLID GREEN.....	6-14
6.4 IR CAMR WILL NOT RECORD.....	6-15
6.5 WHITE LCD WITH "HOT" TEXT.....	6-16
6.6 MOVIE TRANSFER ERROR.....	6-17

This Page Intentionally Blank

EVA IR CAMR

SPECIFICATIONS

CAMR

PIXEL COUNT: 320 x 240

SPECTRAL RANGE: 7.5 μ m-13 μ m (Far IR)

INTERNAL RAM MEMORY: 600 images

CF CARD/FRAME: 1 GB/6000 images

FILE SIZE: ~167 KB per image

TEMPERATURE SENSING RANGE: -40°F to +250°F(-40°C to +120°C)

LEVEL/SPAN: Auto(Manual)

EMISSIVITY RANGE: 0.01 to 1.0

BATT: EHIP


BATT VOLTAGE: 6V

LENS FOV: 24°x18°


POINTING LASER: Wavelength = 635nm

EVA IR CAMR (Continued)

NOMENCLATURE

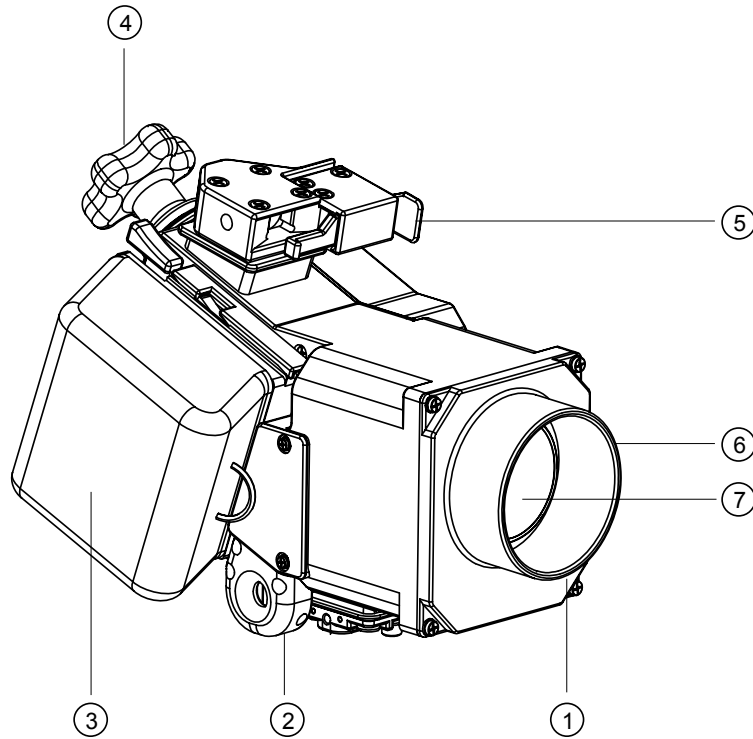

- ① Pointing Laser - Lower side of Baffle (not shown)
- ② RCU Cable Strain Relief
- ③ EHIP Batt
- ④ EVA Knob (provides handhold for pointing)
- ⑤ STD Slide-Lock (holds remote during translation)
- ⑥ Lens Baffle


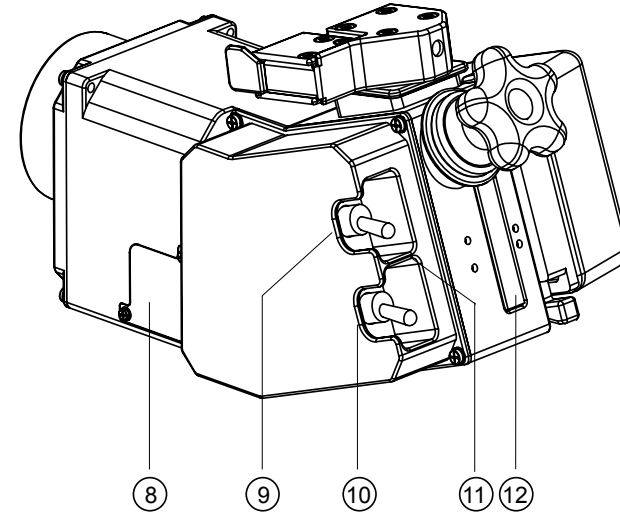


- ⑦ Lens
- ⑧ Access Cover
- ⑨ ENABLE sw
- ⑩ MASTER sw
- ⑪ Batt Status Indicator LED
- ⑫ Compact Flash Memory Card Access
(Card secured w/latch (not shown))

jsc48037_121_076.cvx

EVA IR CAMR (Continued)

NOMENCLATURE (Continued)

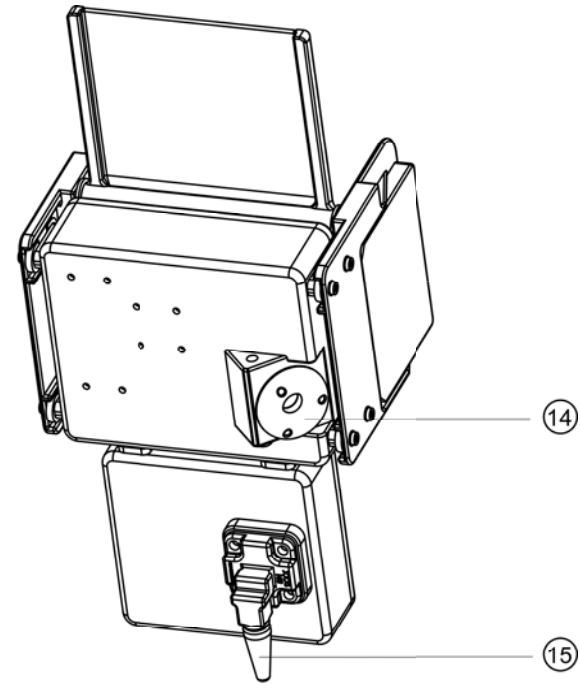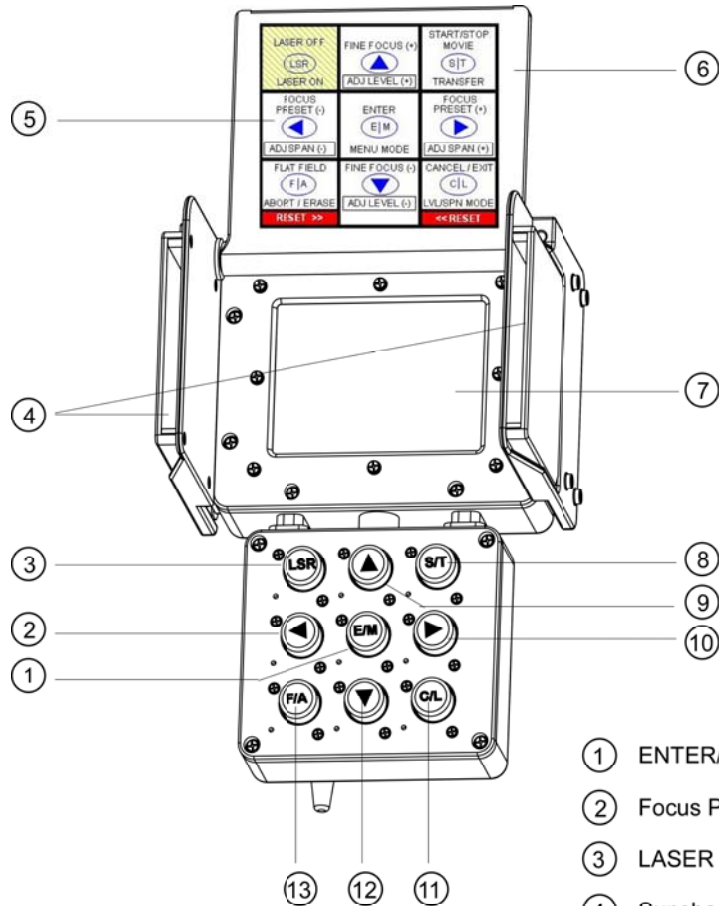










- ① ENTER/MENU MODE (E/M) pb
- ② Focus Preset (-) / Adj Span (-) pb
- ③ LASER (LSR) pb
- ④ Sunshades
- ⑤ Pb Map/Cheat Sheet
- ⑥ LCD Cover
- ⑦ LCD
- ⑧ START,STOP/TRANSFER (S/T) pb
- ⑨ Fine Focus (+) / Adj Level (+) pb
- ⑩ Focus Preset (+) / Adj Span (+) pb
- ⑪ CANCEL/LEVEL (C/L) pb
- ⑫ Fine Focus (-) / Adj Level (-) pb
- ⑬ FLAT FIELD/ABORT,ERASE (F/A) pb
- ⑭ Cable Attach Point
- ⑮ Bayonet

jsc48037_121_077.cvx

EVA IR CAMR (Continued)

NOMENCLATURE (Continued)

LASER OFF  LASER ON	FINE FOCUS (+)  ADJ LEVEL (+)	START/STOP MOVIE  TRANSFER
FOCUS PRESET (-)  ADJ SPAN (-)	ENTER  MENU MODE	FOCUS PRESET (+)  ADJ SPAN (+)
FLAT FIELD  ABORT / ERASE	FINE FOCUS (-)  ADJ LEVEL (-)	CANCEL / EXIT  LVL/SPN MODE
RESET >>		<< RESET

LSR pb

- Push to turn laser OFF
- Push,hold ~3 sec to activate laser

Up/Down Arrow pbs

- Push,hold to fine focus
- When in "Level/Span:Manual", push,hold to increase(decrease) level
- When in Menu Mode, use to navigate and change parameters

S/T pb

- Push to start(stop) movie recording
- Push,hold ~3 sec to transfer images from RAM to compact flash card

Left/Right Arrow pbs

- Push to select preset focus distances (3,6,9,12 ft, or infinity)
- When in "Level/Span:Manual", push,hold to adjust span
- When in Menu Mode, use to navigate and change parameters

E/M pb

- Push to enter functions or change parameters
- Push,hold ~3 sec to enter Menu Mode

F/A pb

- Push to perform flat field correction
- When transferring a movie, push,hold ~3 sec to abort transfer
- When not transferring a movie, push,hold ~3 sec to erase imagery in RAM

C/L pb

- Push to cancel(exit) various menu/Camr options
- After selecting "Manual Adjust" in menu, push,hold ~3 sec to toggle the functionality of Up/Down/Left/Right arrow pbs between focus and level/span modes


F/A and C/L pbs simo

- Push,hold simo ~3 sec to reset menu settings back to default parameters

EVA IR CAMR (Continued)

NOMENCLATURE (Concluded)

I

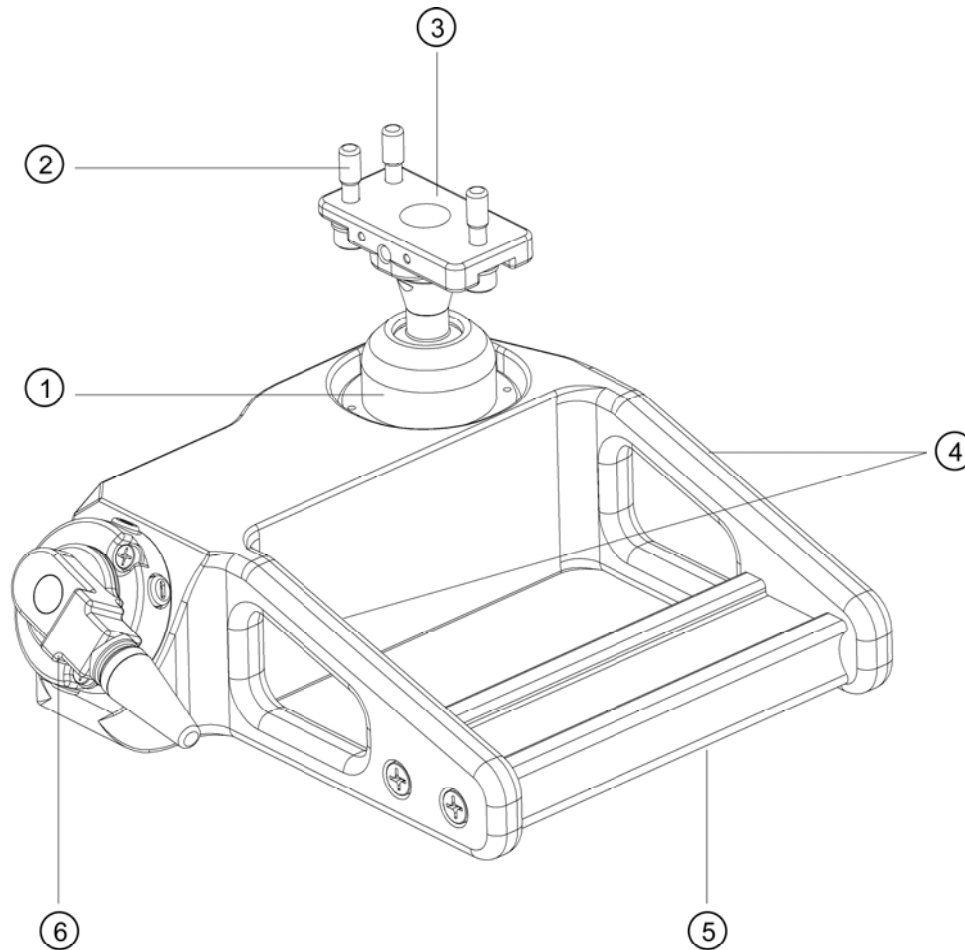

- ① Ball Joint
- ② Bracket Screws
- ③ Camr Interface
- ④ Tether Loop (two)
- ⑤ Dogbone Handrail
- ⑥ Clockable Bayonet

jsc48037_121_078.cvx

EVA IR CAMR (Continued)

CAMR SETUP

1. If Camr Bracket not installed, perform IR CAMR BRACKET ASSEMBLY procedure
2. Install EHIP Batt
3. ✓CF card installed
4. Lens Cover – Fold to left side
5. MASTER sw – ON (wait 20 sec for initialization)
6. ✓Manual('Level/Span: Manual') not displayed in top left of LCD
7. ✓Date/Time – GMT
8. E/M pb – push,hold
 - Sel: "File – Burst Setup"
 - Max # frames – 300
 - Save every – 12th frame
 - ✓FPS – 5.0
 - ✓Elapse Time – 60
 - E/M pb – push
9. E/M pb – push,hold
 - Sel: "File – Images..."
 - If images present in directory:
 - E/M pb – push,hold
 - Sel: "Delete all images"
 - Sel: "Delete"
 - ✓NO images present in directory
 - C/L pb – push
10. ENABLE sw – OFF (hold for 3 sec, observe shutdown msg on screen)
11. Lens cover – Reinstall
12. If not using within 3 hr:
 - MASTER sw – OFF

IR CAMR BRACKET ASSEMBLY

1. Tools Reqd (IFM Tool Locker Tray 3)
 - 1/4-in Torque Wrench (40-200 in-lb)
 - 5/32-in Hex Ball
2. Align Camr Body to Camr Bracket
3. Tighten bracket screws to Camr Body, snug (three screws, 5/32-in Hex Ball)
4. Torque bracket screws to 49 in-lb

EVA IR CAMR (Continued)

NOMINAL MENU SETTINGS

FILE ('File')

Images... – N/A
Save – N/A
Burst Setup
 Max # Frames – 300
 Save every – 12th frame
 FPS – 5.0
 Elapse Time – 60
Burst recording... – N/A

ANALYSIS ('Analysis')

Object Param...
 Emissivity – 0.96
 Distance – 6.6 ft
 T Reflected – 68°F
 T Atmosphere – 68°F
 Rel Humidity – 30%
 External optics – Off
 Optics transmission – N/A
 Optics temperature – N/A

IMAGE ('Image')

Level/Span... – N/A
Manual Adjust – displayed
Palette...
 Palette – Gray
 Inverted – No

SETUP ('Setup')


Image...
 Adjust method – Histogram
 Lock scale – Off
 Lock value – blank
 Scale – On
 Status bar – On
 Saturation colours – Off
 Noise reduction – Off
 Shutter period – Normal
Other Settings
 Power...
 Auto power off – None
 Display power off – None
 LCD illumination – Medium
 Date/Time... – set per GMT
Local Settings...
 Temp unit – °F
 Distance unit – Feet
 Date format – MM/DD/YY
Camera info... – N/A
Profile – N/A
Factory default – N/A

EVA IR CAMR (Continued)

MOVIE RECORDING

1. √MASTER sw – ON
2. Lens Cover – remove
3. ENABLE sw – ON
4. Wait 5 min before recording images
5. Focus on subject
6. F/A pb – push
7. S/T pb – press (start recording)
8. S/T pb – press (stop recording)
9. S/T pb – press and hold (transfer)
10. √Transfer complete

MOVIE PLAYBACK

1. E/M pb – push,hold
2. Sel: “File – Images...”
3. E/M pb – push
4. Sel desired file
5. E/M pb – push
6. Sel: 
7. E/M pb – push
8. When finished: C/L pb – push

DOWNLINKING FILES

- | | |
|----------|---|
| IR Camr | 1. Remove compact flash (CF) card from Camr |
| | 2. Assemble CF Card and PCMCIA Adapter |
| KFX PGSC | 3. Place assembled card,adapter in PGSC |
| | 4. Copy files to “C:\Oca-down\dto851” |
| | 5. Remove assembled card,adapter from PGSC |
| | 6. Disassemble and place CF Card back into Camr |

DELETING FILES

DELETE SINGLE FILES ON CF CARD

1. E/M pb – push,hold
2. Sel: “File – Images...”
3. E/M pb – push
4. Sel desired file
5. E/M pb – push,hold
6. Sel: “Delete”
7. E/M pb – push
8. Sel: “Delete”
9. E/M pb – push

DELETE ALL FILES ON CF CARD

1. E/M pb – push,hold
2. Sel: “File – Images...”
3. E/M pb – push
4. E/M pb – push,hold
5. Sel: “Delete all images”
6. E/M pb – push
7. Sel: “Delete”
8. E/M pb – push
9. C/L pb – push

EVA IR CAMR (Concluded)

LEVEL/SPAN MODES

MANUAL ADJUST MODE

NOTE

In this mode, user adjusts level,span

1. E/M pb – push,hold
2. Sel: “Image – Manual adjust”
3. E/M pb – push

NOTE

C/L pb will change functionality of arrow pb.

If “Level/Span: Manual” displayed in top left of LCD:
Up/Down arrow pbs adjust level
Left/Right pbs adjust span.

If “Manual” displayed in top left of LCD:
Up/Down arrow pbs adjust fine focus
Left/Right pbs adjust focus preset

CONTINUOUS ADJUST MODE

NOTE

In this mode, Camr automatically adjusts level,span

1. E/M pb – push,hold
2. Sel: “Image – Continuous adjust”
3. E/M pb – push

DATE/TIME SET

1. E/M pb – push,hold
2. Sel: “Setup – Other settings”
3. E/M pb – push
4. Sel: “Date/time”
5. E/M pb – push
6. Sel desired field (up/down arrow pb)
7. Sel desired setting (left/right arrow pb)
8. E/M pb – push

SELECTING DIFFERENT PALETTES

1. E/M pb – push,hold
2. Sel: “Image – Palette...”
3. E/M pb – push
4. Sel desired palette (left/right arrow pb)
5. E/M pb – push

RESET TO NASA PROFILE

1. √All images transferred to CF card
2. F/A pb,C/L pb – push and hold simo for 3 sec

DEACTIVATION

1. √All images transferred to CF card
2. ENABLE sw – OFF (hold for 3 sec)
3. MASTER sw – OFF
4. Lens Cover – cl


IR CAMR

6.1 NO LCD PWR/DISPLAY

No LCD
Pwr/Display

Nominal Config:
(Camr)
EHIP – install
CF Card – install
Lens Cover – fold to left
MASTER sw – ON
√“Level/Span: Manual” or “Manual” not display on LCD

(RCU Menu – Burst Setup)
√Max # frames: 300
√Save every: 12 frame

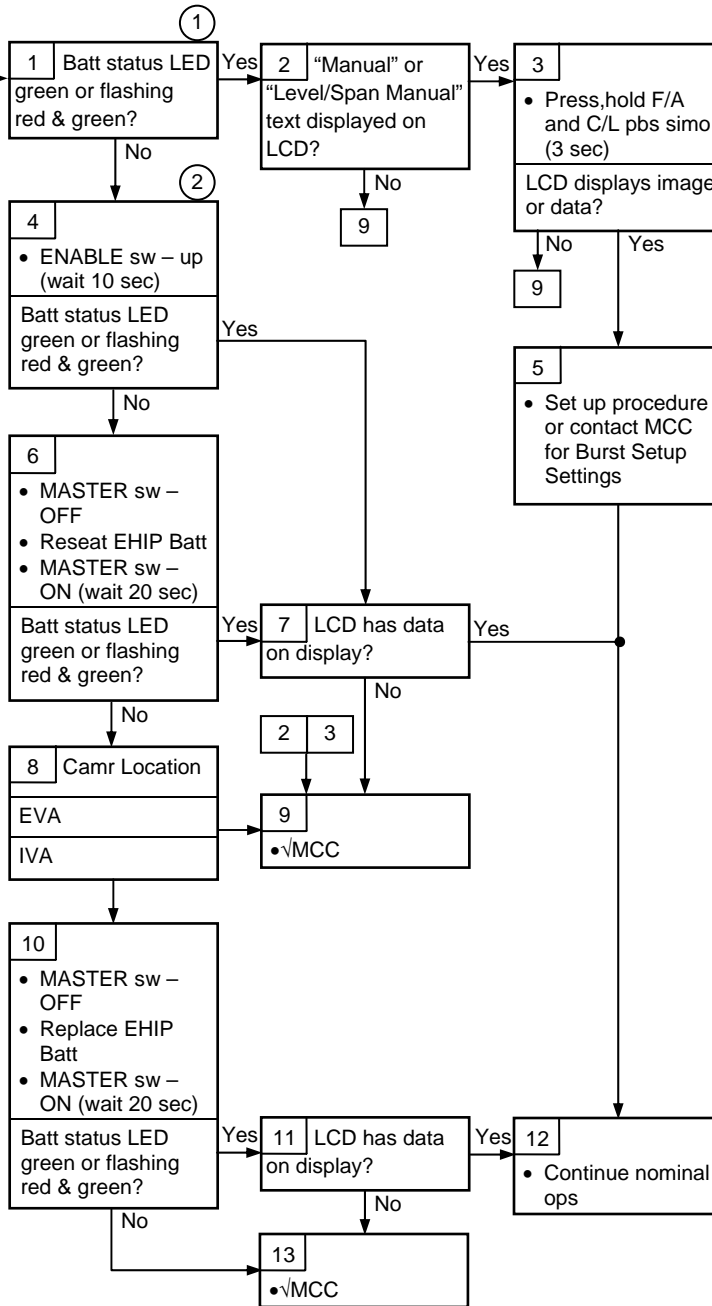

①
Flashing red & green LED indicates that 75% of Batt has been used

②
ENABLE sw is a momentary sw


IR CAMR

6.2 RCU pbs NOT RESPONDING

RCU pbs Not Responding

Nominal Config:
(Camr)
EHIP – install
CF Card – install
Lens Cover – fold to left
MASTER sw – ON
√“Level/Scan: Manual” or “Manual” not display on LCD

(RCU Menu – Burst Setup)
√Max # frames: 300
√Save every: 12 frame

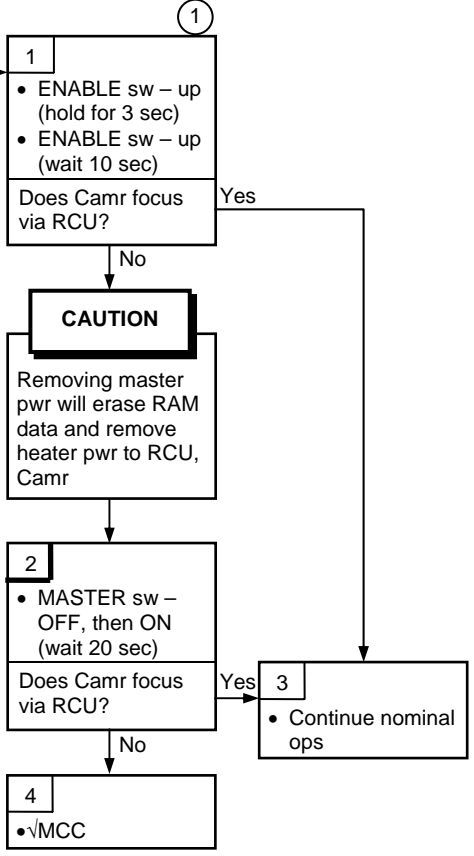

①
ENABLE sw is a momentary sw

IR CAMR


6.3 BATT LED NOT SOLID GREEN

I

Batt LED Not Solid Green

Nominal Config:
 (Camr)
 EHIP – install
 CF Card – install
 Lens Cover – fold to left
 MASTER sw – ON
 √“Level/Span: Manual” or “Manual” not display on LCD

(RCU Menu – Burst Setup)
 √Max # frames: 300
 √Save every: 12 frame

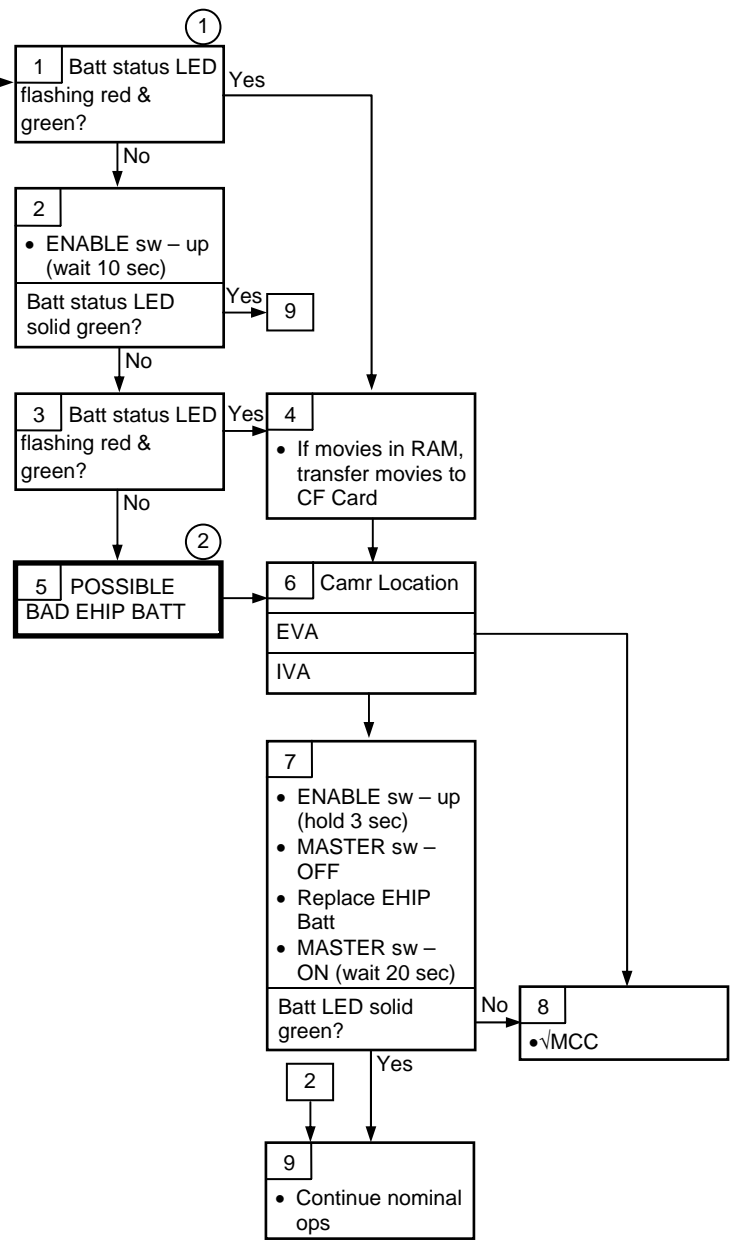

①
Flashing red & green LED indicates that 75% of Batt has been used

②
ENABLE sw is a momentary sw


IR CAMR

6.4 IR CAMR WILL NOT RECORD

IR Camr Will Not Record

Nominal Config:
 (Camr)
 EHIP – install
 CF Card – install
 Lens Cover – fold to left
 MASTER sw – ON
 √“Level/Span: Manual” or “Manual” not display on LCD

(RCU Menu – Burst Setup)
 √Max # frames: 300
 √Save every: 12 frame

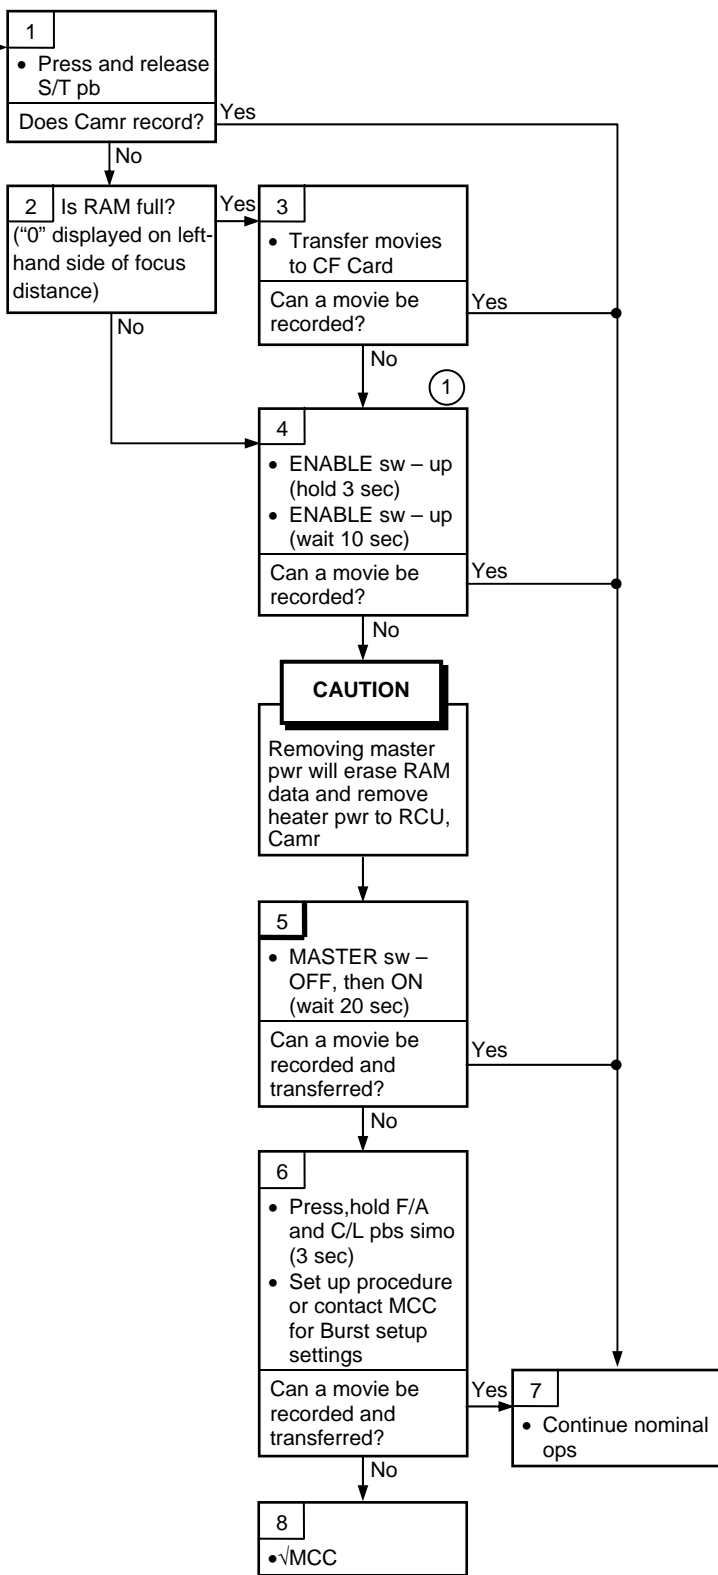

①
 ENABLE sw is a momentary sw


IR CAMR

6.5 WHITE LCD WITH "HOT" TEXT

White LCD With "Hot" Text

Nominal Config:
(Camr)
EHIP – install
CF Card – install
Lens Cover – fold to left
MASTER sw – ON
√"Level/Span: Manual" or "Manual" not display on LCD

(RCU Menu – Burst Setup)
√Max # frames: 300
√Save every: 12 frame

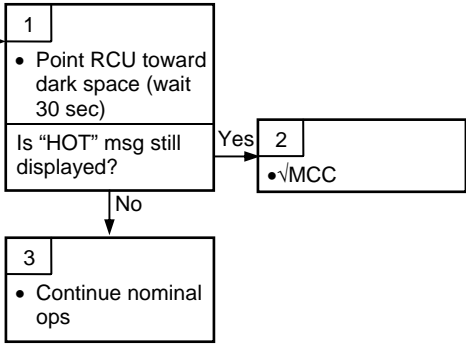


IR CAMR

6.6 MOVIE TRANSFER ERROR

Movie Transfer Error


Nominal Config:
(Camr)
EHIP – install
CF Card – install
Lens Cover – fold to left
MASTER sw – ON
√“Level/Span: Manual” or “Manual” not display on LCD

(RCU Menu – Burst Setup)
√Max # frames: 300
√Save every: 12 frame

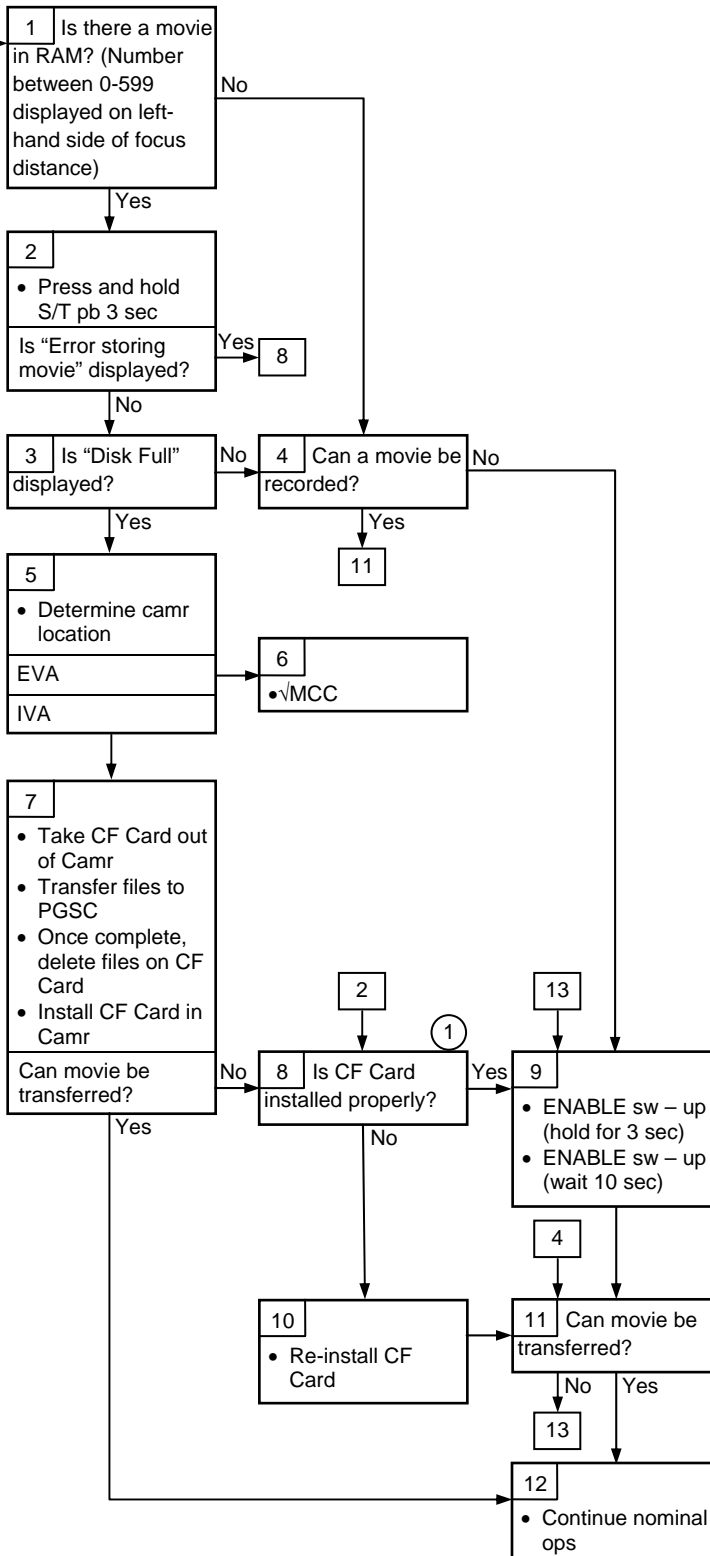

①
If CF Card not properly installed, Burst record settings are not configurable via menu

IR CAMR 6.6 (Cont)

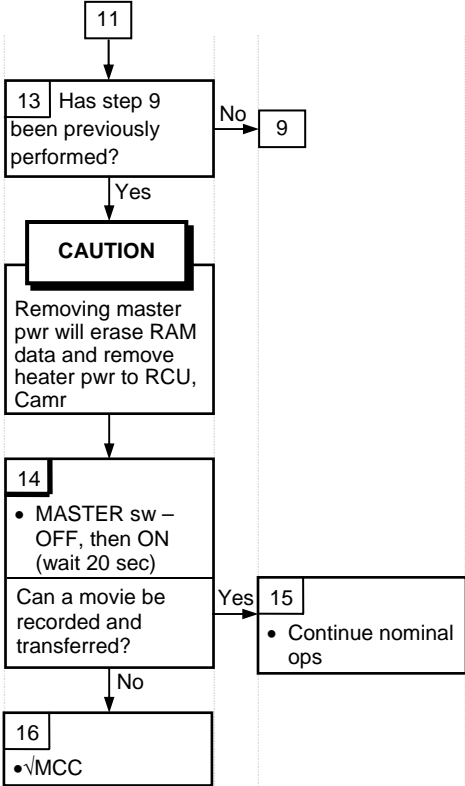

CANON G1

	<u>PAGE</u>
SPECIFICATIONS.....	7-2
LENS DATA.....	7-2
NOMENCLATURE.....	7-3
NOMINAL MENU SETTINGS.....	7-10
MANUAL SETTINGS.....	7-14
ANALOG (SD DTV) CC REC,DNLK.....	7-15
HD DIGITAL CC DNLK.....	7-17
CC BATT CHARGING.....	7-19
G1 TO G1 VIA FIREWIRE.....	7-20
G1 TO V10 VIA FIREWIRE.....	7-21
G1 TO V10 VIA ORBITER TV SYSTEM.....	7-22
G1 TO DSR-25 VTR.....	7-23
SINGLE CAMCORDER W/CAMCORDER MICROPHONE.....	7-24

CANON G1

CANON G1

SPECIFICATIONS

IMAGE SENSOR: 1/3-in CCD x 3 (1,670,000 pixels)
ZOOM: 20X Optical Zoom, 4.5-90mm (32.5-650mm, 35mm in Photo Equivalent)
VIDEO RECORDING SYSTEM:
 HDV – High Definition Video 1080i
 DV – Standard Definition Video 480i
AUDIO RECORDING SYSTEM:
 HDV – MPEG-1, 16 bit (48kHz)
 DV – PCM Digital Sound, 16 bit (48kHz) or 12 bit (32kHz)
TAPE FORMAT: Mini DV Cassette (Mini DVCAM acceptable)
MAXIMUM RECORDING TIME:
 HDV – 60 min
 DV: SP – 60 min; LP – 90 min
VIEWFINDER: 0.57-in wide, 16:9 aspect ratio TFT Color; ~269,000 pixels
LCD SCREEN: 2.8-in wide, 16:9 aspect ratio TFT Color; ~207,000 pixels
MICROPHONE: Stereo Electret, Cross-layout
FOCUS SYSTEM: Autofocus, Manual Focusing w/Focus Ring
WHITE BALANCE: Auto White Balance, Preset, Custom, Manual
MINIMUM ILLUMINATION: 0.4 lx (1/3 Shutter, F1.6, Gain 18 dB)
IMAGE STABILIZATION: Optical Shift Image Stabilizer
POWER: 7.2V Li-ION Batt Pack, 8.4V DC In
BODY WEIGHT: 4.6 lb
BATT LIFETIME: ~90 min
BATT WEIGHT: 0.41 lb
WIDE ANGLE CONVERTER:
 CONVERSION – 0.8X
 CONVERTED FOCAL LENGTH – 3.6-72mm
 WEIGHT – 1.60 lb


LENS DATA

Lens	Zoom Ratio	Approximate Field of View			Filter Size
		Horizontal	Vertical	Diagonal	
4.5-90mm	20:1	58°-3.2°	40.5°-2.1°	67.3°-3.8°	72mm
w/Wide Conversion Lens 3.6-72mm	20:1	69.4°-4.0°	49.5°-2.6°	79.6°-4.8°	N/A

CANON G1 (Continued)

NOMENCLATURE

CAMCORDER – TOP VIEW

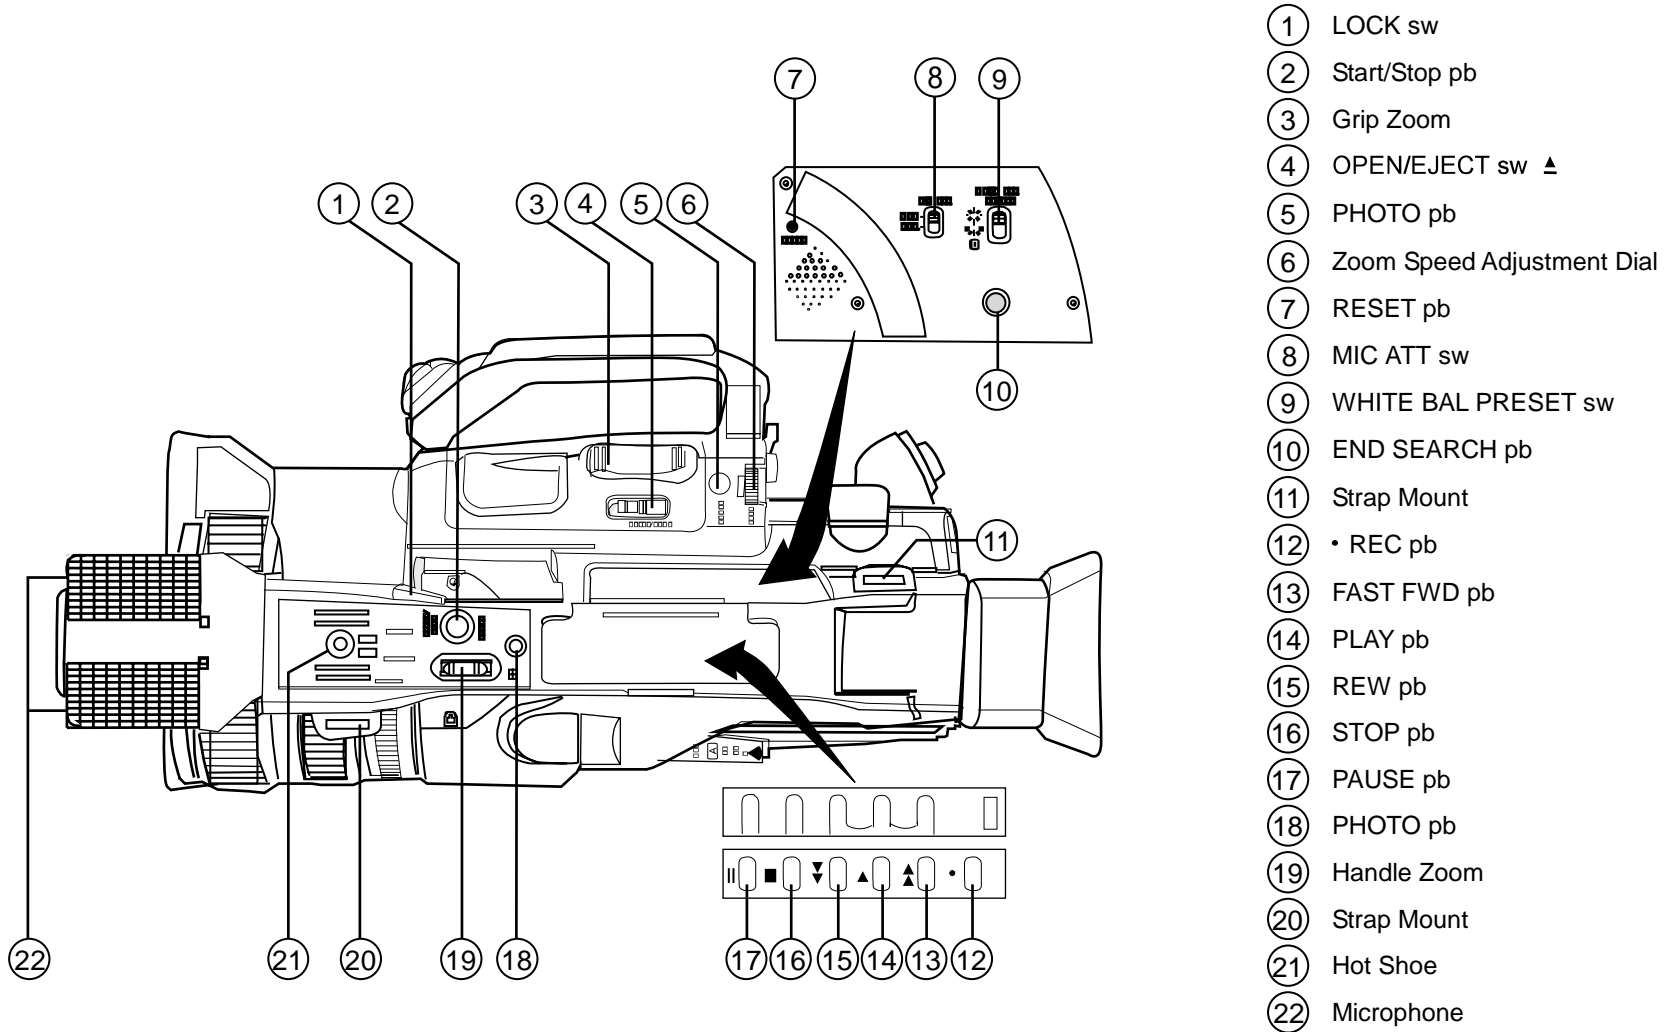


- ① LOCK sw
- ② Start/Stop pb
- ③ Grip Zoom
- ④ OPEN/EJECT sw ▲
- ⑤ PHOTO pb
- ⑥ Zoom Speed Adjustment Dial
- ⑦ RESET pb
- ⑧ MIC ATT sw
- ⑨ WHITE BAL PRESET sw
- ⑩ END SEARCH pb
- ⑪ Strap Mount
- ⑫ • REC pb
- ⑬ FAST FWD pb
- ⑭ PLAY pb
- ⑮ REW pb
- ⑯ STOP pb
- ⑰ PAUSE pb
- ⑱ PHOTO pb
- ⑲ Handle Zoom
- ⑳ Strap Mount
- ㉑ Hot Shoe
- ㉒ Microphone


jsc48037_161.cvx

CANON G1 (Continued)

NOMENCLATURE (Continued)

CAMCORDER – LEFT SIDE FRONT SECTION

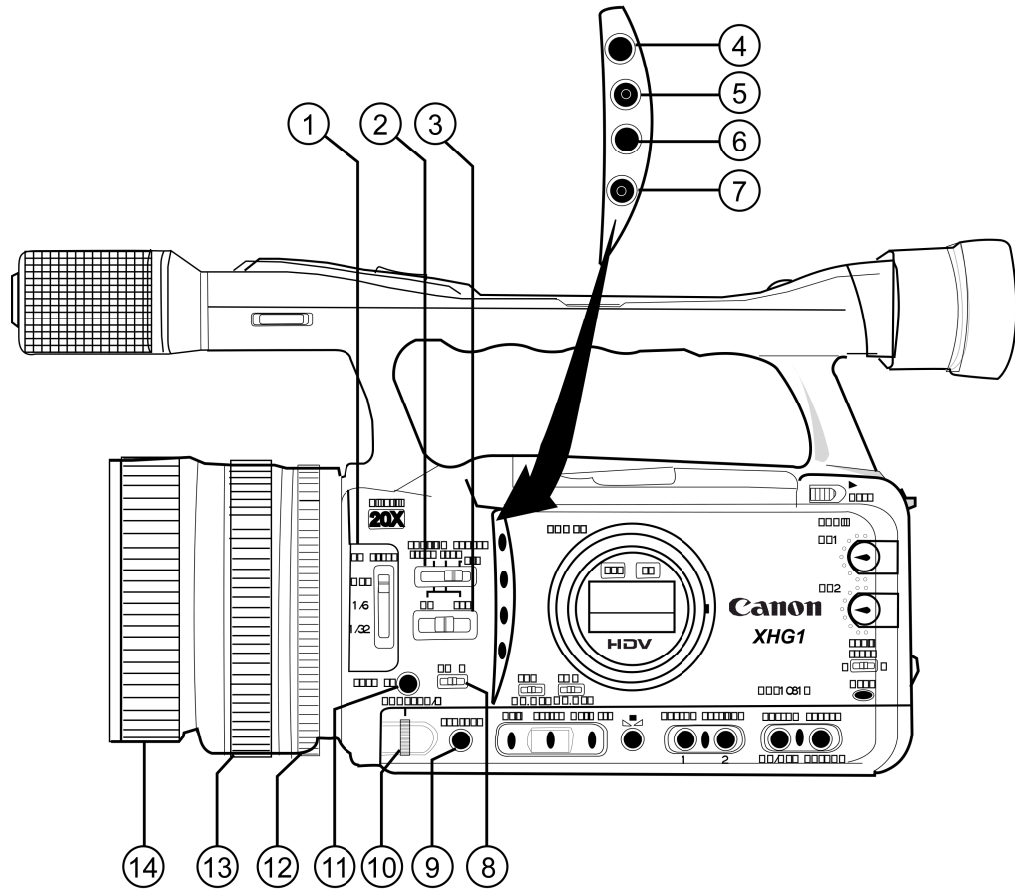


- ① ND FILTER sw
- ② POSITION PRESET sw
- ③ POSITION PRESET ON/SET sw
- ④ DISP. (Display) pb
- ⑤ PEAKING pb
- ⑥ MAGN. (Magnification) pb
- ⑦  (Record Review) pb
- ⑧ Focus Mode sw
- ⑨ EXP. LOCK pb
- ⑩ SHUTTER/K tw
- ⑪ PUSH AF pb
- ⑫ Aperture Ring
- ⑬ Zoom Ring
- ⑭ Focus Ring


jsc48037_162.cvx

CANON G1 (Continued)

NOMENCLATURE (Continued)

CAMCORDER – LEFT SIDE REAR SECTION

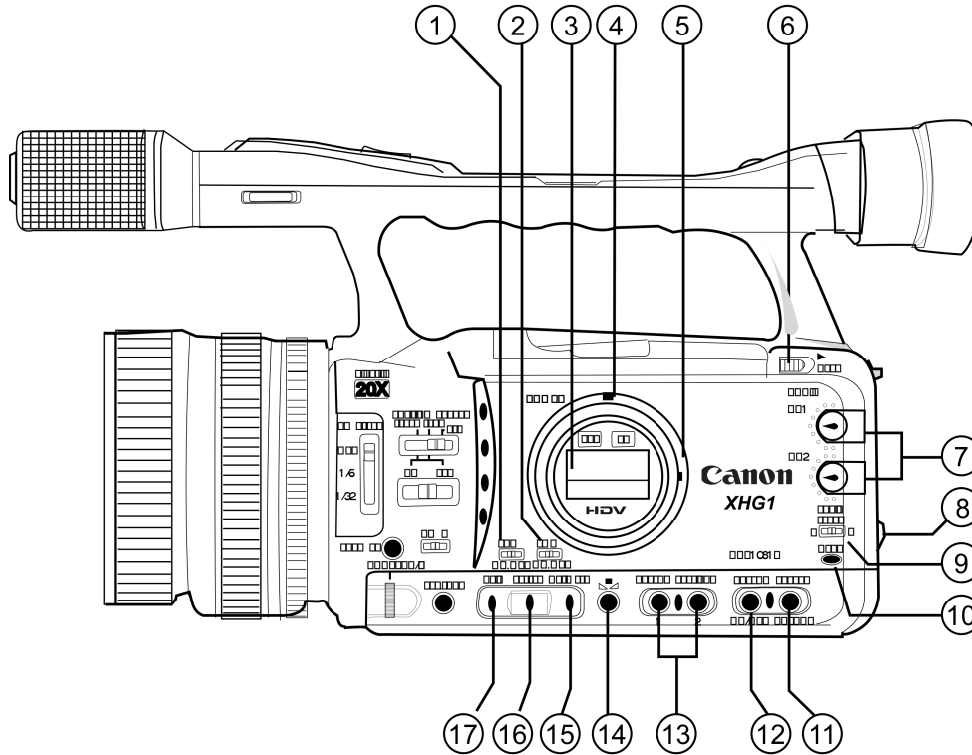


- ① AGC sw (Automatic Gain Control)
- ② AWB sw (Automatic White Balance)
- ③ Side Panel Display
- ④ POWER Indicator
- ⑤ POWER Dial
- ⑥ OPEN sw (open the LCD display)
- ⑦ **AUDIO** CH1/CH2 Dials
- ⑧ SELECT/SET Dial
- ⑨ AUDIO LEVEL sw
- ⑩ MENU pb
- ⑪ CUSTOM PRESET SELECT pb
- ⑫ CUSTOM PRESET ON/OFF pb
- ⑬ CUSTOM KEY pb
- ⑭ WHITE BAL  pb (White Balance)
- ⑮ WHITE BAL sw
- ⑯ OUTPUT sw
- ⑰ GAIN sw

jsc48037_163.cvx

CANON G1 (Continued)

NOMENCLATURE (Continued)

CAMCORDER – PWR DIAL

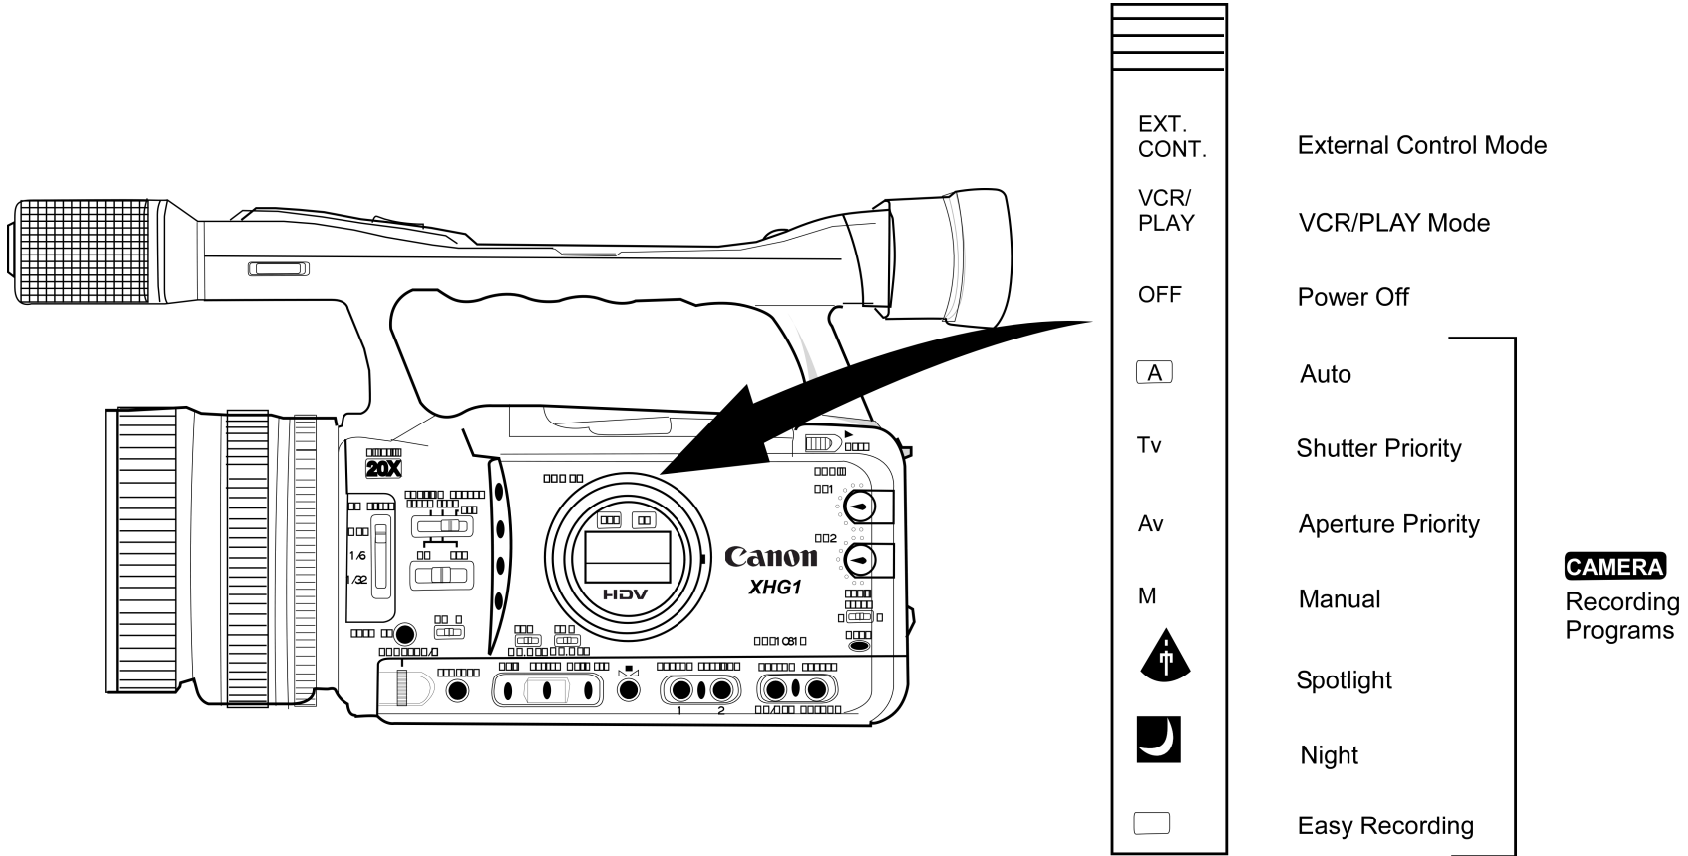




jsc48037_164.cvx

CANON G1 (Continued)

NOMENCLATURE (Continued)

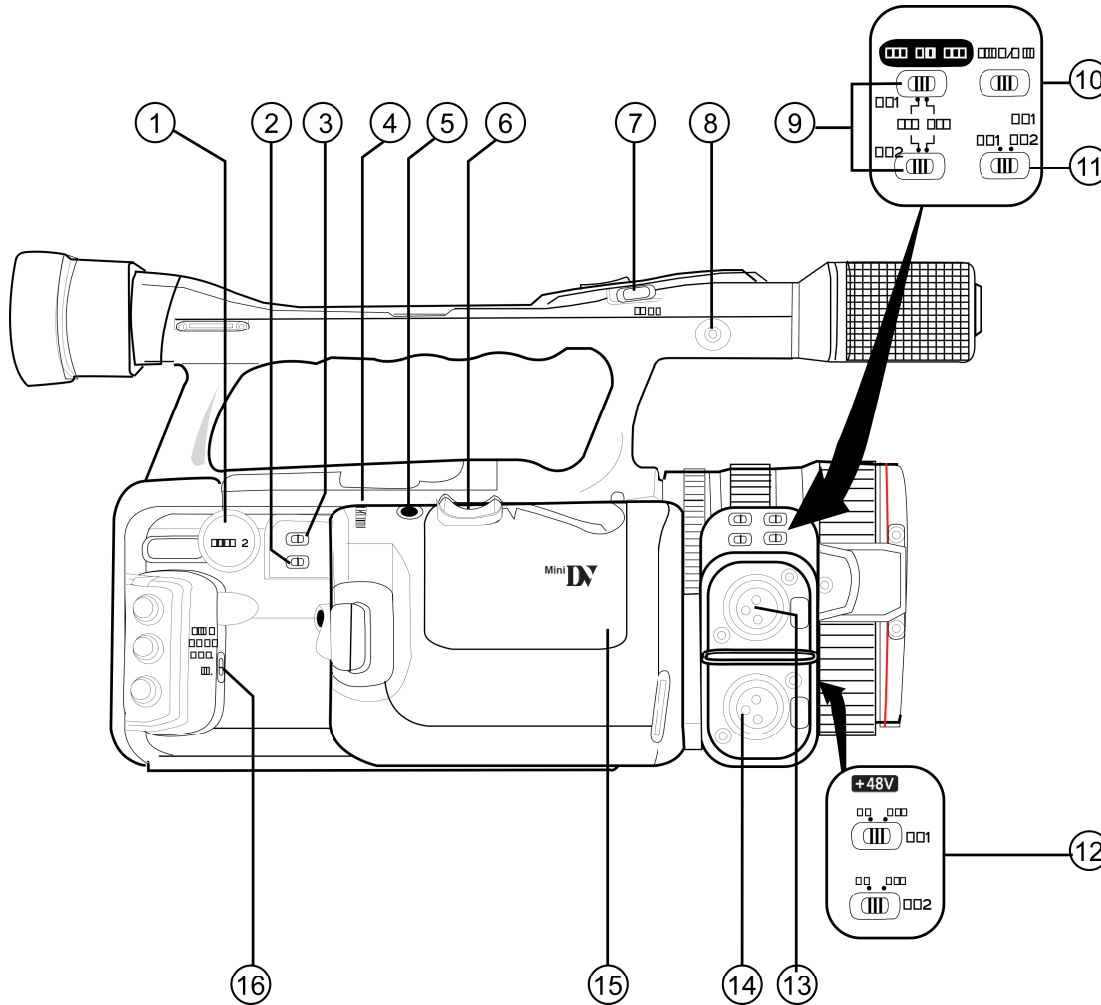CAMCORDER – RIGHT SIDE






- ① V2 Terminal
- ② ZOOM SPEED sw
- ③ Card/Tape sw 
- ④ Zoom Speed Adjustment Dial
- ⑤ PHOTO pb
- ⑥ Grip Zoom
- ⑦ LOCK sw
- ⑧ MIC (External Microphone) Terminal
- ⑨ XLR MIC ATT. sw
- ⑩ LINE/MIC sw
- ⑪ Input Channel Selection sw
- ⑫  sw
- ⑬ CH1 Input Terminal
- ⑭ CH2 Input Terminal
- ⑮ Cassette Compartment
- ⑯ TIME CODE sw

CANON G1 (Continued)

NOMENCLATURE (Continued)

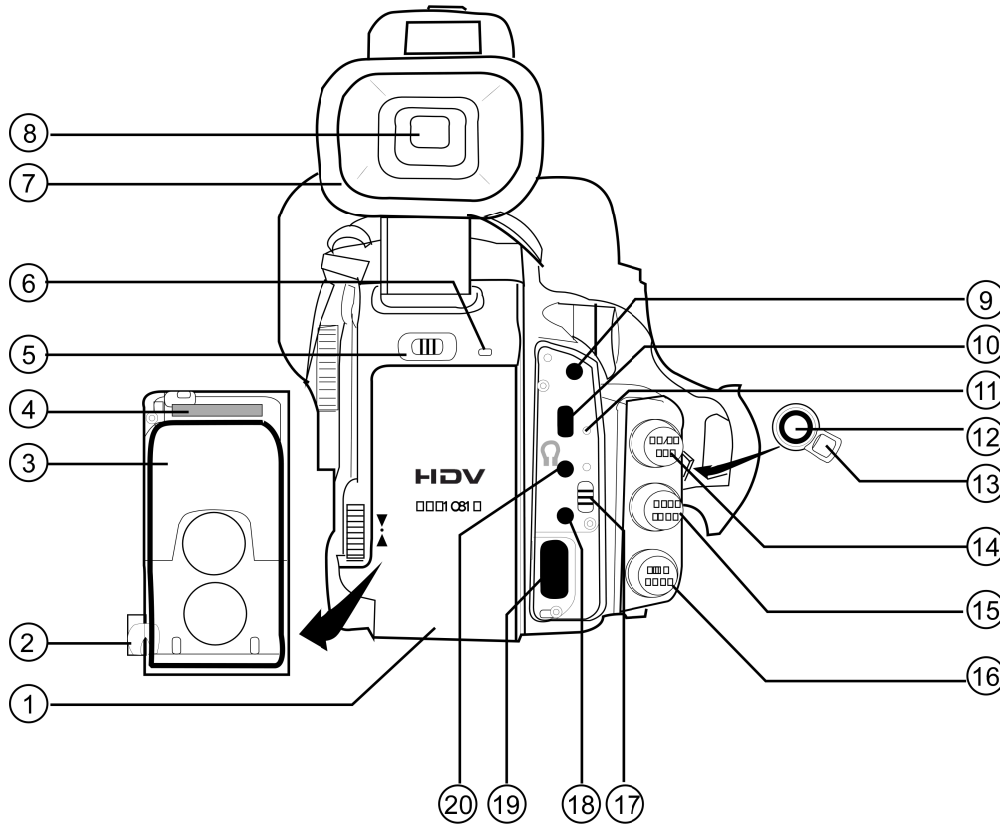CAMCORDER – BACK VIEW




- ① Battery/Memory Card Compartment
- ② BATT. RELEASE Latch
- ③ Battery Attachment Unit
- ④ Memory Card Slot
- ⑤ OPEN sw (Battery Compartment)
- ⑥ CARD Access Indicator
- ⑦ Diopic Adjustment Lever
- ⑧ Viewfinder
- ⑨  Terminal
- ⑩ HDV/DV Terminal
- ⑪ HDV Indicator
- ⑫ Start/Stop pb
- ⑬ Standby/Lock Lever
- ⑭ HD/SD SDI Terminal
- ⑮ GENLOCK Terminal
- ⑯ TIME CODE Terminal
- ⑰ AV1/AV2 sw
- ⑱ AV1 Terminal
- ⑲ COMPONENT OUT Terminal
- ⑳  Headphones Terminal

jsc48037_166.cvx

CANON G1 (Continued)

NOMENCLATURE (Concluded)

CAMCORDER – FRONT VIEW

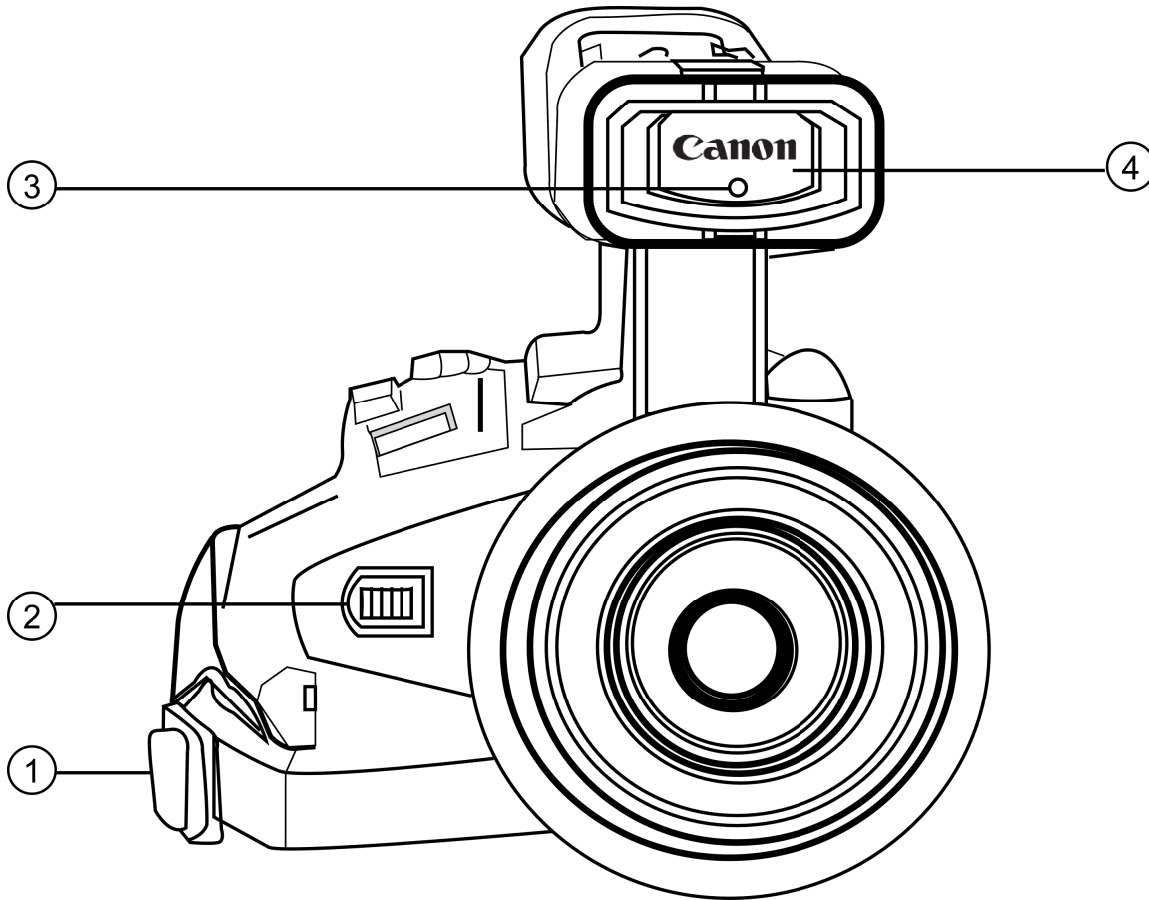

- ① Grip Belt
- ② Instant AF External Sensor
- ③ Tally Lamp
- ④ Remote Sensor

jsc48037_167.cvx

CANON G1 (Continued)

NOMINAL MENU SETTINGS


CAMR MENU (* – non-default)

SIGNAL SETUP

TIME CODE

FRAME SETTING – DROP
COUNT-UP – REC-RUN
GENLOCK ADJUST – 0000
SIGNAL STD – HD
FRAME RATE – 60i
COMP. OUT – 1080i/480i
SDI OUTPUT – OFF
SPEC. – AUTO

CAMERA SETUP

AE SHIFT – ±0
GAIN SETTING
GAIN L – ±0dB
M – 6dB
H – 12dB
AF MODE – NORMAL AF*
IMG STAB – ON ()
SKIN DETAIL
EFFECT LEVEL – OFF
SKY DETAIL – OFF
COLOR CORR.
CORRECT – OFF
F SPEED PSET – HIGH

RECORDING SETUP

DV REC MODE – SP (Standard Definition Mode Only)
UB REC – INT. USB-BIT
SELECT – 00 00 00 00
IMG QUALITY – FINE
IMAGE SIZE – LW1920x1080
FILE NOS. – CONTINUOUS

AUDIO SETUP

DV AUDIO – 16 bit (Standard Definition Mode Only)
AUD. M. SET – NORMAL
MIC MODE – NORMAL
SENS. – NORMAL
XLR INPUT – OFF
GAIN UP – OFF

DISPLAY SETUP

CVF SETUP

BRIGHTNESS – mid
CONTRAST – mid
COLOR – mid
SHARPNESS – mid
BACKLIGHT – NORMAL

LCD SETUP

BRIGHTNESS – mid
CONTRAST – mid
COLOR – mid
SHARPNESS – mid
BACKLIGHT – NORMAL

CVF+LCD BW – OFF

ON – OFF

LANGUAGE – ENGLISH

MARKERS – OFF

ASPECT GUIDE – 4:3*

SAFETY ZONE – OFF

ZEBRA – OFF

LEVEL – 85

TV SCREEN – OFF*

AUDIO LEVEL – ON

GUIDE INFO – CUSTOM KEYS

UB DISPLAY – OFF

CANON G1 (Continued)

NOMINAL MENU SETTINGS (Continued)

CAMR MENU (* – non-default) (Continued)

SYSTEM SETUP

CUSTOM KEY 1 – SHTR D.LOCK*
2 – (NONE)*

D/TIME SET

T.ZONE/DST – LONDON*
DATE/TIME – ‘GMT’*
DATE FORMAT – ‘M.D.Y.TIME’
DV CONTROL – OFF
MAGN. B. LOCK – ACTIVE*
SHTR D. LOCK – DISABLED
RESET ALL – NO

CUSTOMIZE

CUSTOM PRESET

FOR CP1 thru CP9 w/CP1 SELECTED

GAMMA – NORMAL
KNEE – AUTO
BLACK – MIDDLE
MASTER PED – 0
SETUP LEVEL – 0
SHARPNESS – -3*
H DTL FREQ – MIDDLE
DTL HV BALANCE – 0
CORING – 0
NR1 – OFF
NR2 – OFF
COLOR MAT. – NORMAL
COLOR GAIN – 6*
COLOR PHASE – -6*
R GAIN – 1*
G GAIN – 2*
B GAIN – -1*

CUSTOMIZE (Continued)

CUSTOM PRESET (Concluded)

RG MATRIX – 2*
RB MATRIX – 0
GR MATRIX – 0
GB MATRIX – 1*
BR MATRIX – 0
BG MATRIX – -4*

FUNCTION – C.Fn1 Active*

SETTING ITEMS

00 SHCKLSS WB/GN – 00
01 AE RESPONSE – 00
02 HIGH-SPEED ZOOM – 00
03 FOCUS RING CTRL – 01*
04 BUTTONS OPER. – 00
05 RINGS DIRECTION – 00
06 DIALS DIRECTION – 00
07 FOCUS PRIORITY – 00
08 SIMULT.IMG.REC – 00
09 MARKER LEVEL – 00
10 F. AST BW-MOD – 00
11 OBJ DST UNIT – 00
12 ZOOM INDICATOR – 00
13 COLOR BARS – 00
14 1kHz TONE – 00
15 WIRELESS REMOTE – 00
16 POWER SAVE – 01*
17 TALLY LAMP – 02*
18 LED – 00
19 BEEP – 00
20 CHARACTER REC – 00

CANON G1 (Continued)

NOMINAL MENU SETTINGS (Continued)

CAMR MENU (Concluded)

CUSTOMIZE (Concluded)

CUSTOM DISPLAY

SETTING ITEMS (*non-default)

- 00 REC PROGRAMS – 01
- 01 CAMERA DATA1 – 03
- 02 CAMERA DATA2 – 07
- 03 ZOOM – 01
- 04 FOCUS – 02*
- 05 ND – 01
- 06 IMAGE EFFECTS – 07
- 07 F. ASSIST FUNC. – 03
- 08 CUSTOMIZE – 03
- 09 RECORDING STD – 01
- 10 DV REC MODE – 00
- 11 FRAME RATE – 01
- 12 TAPE – 03
- 13 TAPE REMAINDER – 01*
- 14 TAPE/CARD – 02*
- 15 LIGHT METERING – 03
- 16 CARD – 03
- 17 CARD REMAINDER – 02
- 18 AUDIO – 00
- 19 CONDENSATION – 01
- 20 BATTERY – 01*
- 21 WIRELESS REMOTE – 02

VCR MENU (* – non-default)

SIGNAL SETUP

TIME CODE

- FRAME SETTING – DROP
- COUNT-UP – REC RUN
- HDV/DV IN – REGEN.
- PLAYBACK STD – AUTO
- COMP. OUT – 1080i/480i
- SDI OUTPUT – OFF
- SPEC. – AUTO
- AV->DV – OFF
- HD DOWN-CONV – ON
- LETTERBOX – OFF

RECORDING SETUP

- DV REC MODE – SP
- UB SELECT – 00 00 00 00
- IMG QUALITY – FINE
- HD IMG SIZE – LW1920x1080
- FILE NOS. – CONTINUOUS

AUDIO SETUP

- SEL AUDIO CH – CH1/3 / CH2/4
- AUD. M. SET – CH1/2
- DV AUDIO – 16 bit

CANON G1 (Continued)

NOMINAL MENU SETTINGS (Concluded)

VCR MENU (* – non-default) (Concluded)

DISPLAY SETUP

CVF SETUP

BRIGHTNESS – mid
CONTRAST – mid
COLOR – mid
SHARPNESS – mid
BACKLIGHT – NORMAL

LCD SETUP

BRIGHTNESS – mid
CONTRAST – mid
COLOR – mid
SHARPNESS – mid
BACKLIGHT – NORMAL

CVF+LCD BW – OFF
ON- OFF

TV SCREEN – OFF
AUDIO LEVEL – ON
LANGUAGE – ENGLISH
CUSTOM KEY – OFF
DATA CODE – DATE & TIME
6SEC. DATE – OFF
UB DISPLAY – OFF

SYSTEM SETUP

CUSTOM KEY 1 – TV SCREEN
2 – DATA CODE

D/TIME SET

T.ZONE/DST – LONDON
DATE/TIME – 'GMT'
DATE FORMAT – 'M.D.Y.TIME'
RESET ALL – NO

CUSTOM FUNCTION – C.FN1

SETTING ITEMS (*NON-DEFAULT)



00 SHCKLSS WB/GN – 00
01 AE RESPONSE – 00
02 HIGH-SPEED ZOOM – 00
03 FOCUS RING CTRL – 01*
04 BUTTONS OPER. – 00
05 RINGS DIRECTION – 00
06 DIALS DIRECTION – 00
07 FOCUS PRIORITY – 00
08 SIMULT.IMG.REC – 00
09 MARKER LEVEL – 00
10 F. AST BW-MOD – 00
11 OBJ DST UNIT – 00
12 ZOOM INDICATOR – 00
13 COLOR BARS – 00
14 1kHz TONE – 00
15 WIRELESS REMOTE – 00
16 POWER SAVE – 01*
17 TALLY LAMP – 02*
18 LED – 00
19 BEEP – 00
20 CHARACTER REC – 00

CANON G1 (Continued)

MANUAL SETTINGS

FOCUS

MANUAL FOCUS

PWR dial – **A** (Tv,Av,M, , )
AF/M sw – MANUAL (MF display in viewfinder (LCD))
Zoom – IN to subject
Focus manually
Zoom to desired setting
Begin recording as reqd





TEMP AUTO FOCUS

PUSH AF pb – press,hold for temp Auto Focus





SHUTTER SPEED

PWR dial – **A** (Tv,M)
If **A** , EXP.LOCK pb – push
SHUTTER/K tw – rotate to select SS from 1/4 to 1/15,000 sec, CS
If **A** , to exit Shutter Speed:
EXP.LOCK pb – push
√No SS displayed

WHITE BALANCE

PWR dial – **A** (Tv,Av,M, , )
AWB – OFF
WHITE BAL – A(B,PRE)
For A(B):
To set WHT BAL, place white sheet of paper in CC FOV (under same lighting conditions)
 tw – push
White Balance icon  A(B) will blink for 2 sec and become steady

WHITE BALANCE (Concluded)

For PRE:
WHITE BAL PRESET –  (, **K**)
For **K**:
 pb – push (flashing #K)
SHUTTER/K tw – rotate to desired color temperature
 pb – push (solid #K)

APERTURE

PWR dial – **A** (Av,M)
If **A** , EXP.LOCK pb – push
Aperture Ring – rotate to select AP from F1.6 to F9.5
PROGRAM AE pb – press
If **A** , to exit Aperture:
EXP.LOCK pb – push
√No F# displayed

GAIN

PWR dial – **A** (Tv,Av,M)
AGC – OFF
GAIN – L(M,H) as reqd
√+/- #dB displayed on LCD(Viewfinder)

CANON G1 (Continued)

ANALOG (SD DTV) CC REC,DNLK

Config H/W per dwg at right

AVIU SYNC/VIDEO – VIDEO
 HI-Z/75 – 75
 PWR SELECT – LO

O19(MO58F) √TV PWR – ON

CC √Wide Conversion lens installed
 √ND FILTER – OFF
 Install Audio Muting Plug (optional)
 √OUTPUT – CAM
 √A/V1/V2 – V2
 √...-
 √STANDBY/LOCK – STANDBY

PWR dial – "green"

If rec to tape:

Tape – Install



√Viewfinder (LCD) displays "green" •||
 Mount w/Multiuse Brkt, Clamp as reqd

CAUTION

Due to temp constraints, worklights at full pwr for 60 min; 90% pwr for unlimited time

Worklights Install fresh BATTs
 Mount light(s) w/Brackets (Velcro/tape)
 Pwr – as reqd

Cabin Lts Flt Deck – ON
 Lts in FOV – OFF as reqd
 Lt Shades – install as reqd
 Window Shades – install as reqd

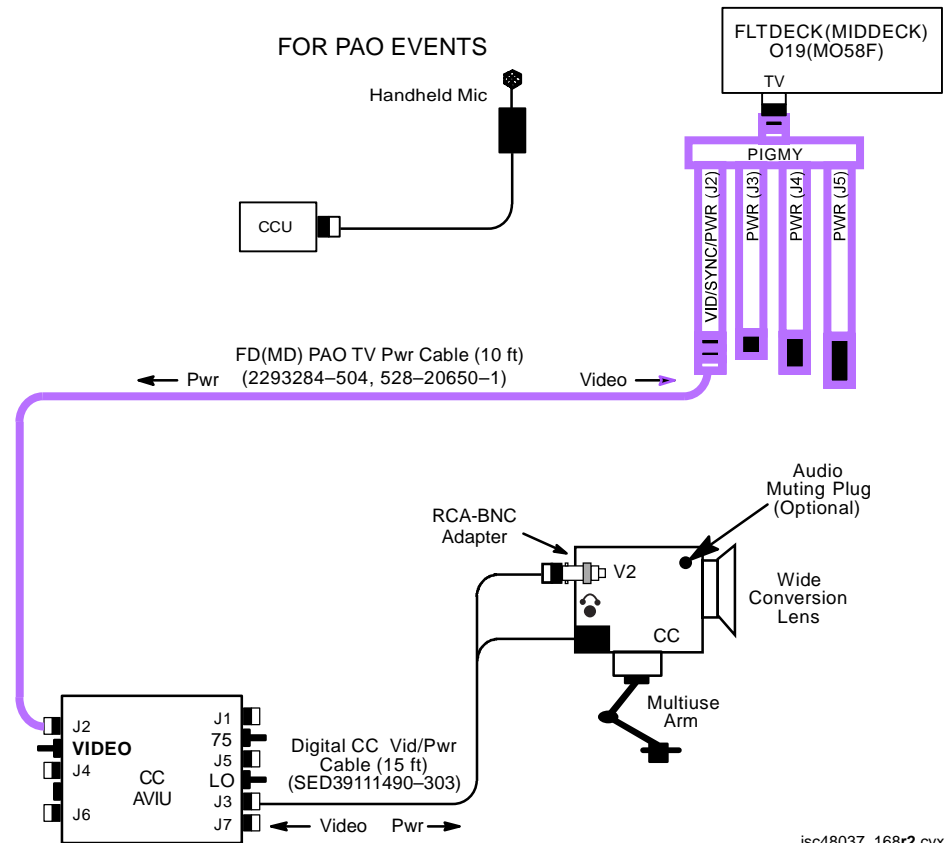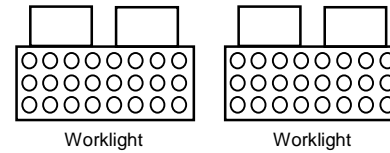

jsc48037_168r2.cvx

CANON G1 (Continued)

ANALOG (SD DTV) CC REC,DNLK (Concluded)

CC √Scene composition
 Adjust Camr angle for best framing

CCU CCU PWR – ON

ATU PWR – AUD
 A/G 1(2) – T/R
 All Other Loops – OFF
 XMIT/ICOM MODE SEL – PTT/PTT
 MSTR SPKR VOL SEL – as reqd

A7 When ready for dnlk:
 √TV DNLK – ENA
 PWR CNTL – PNL
 CONTR UNIT – MNA(B)
 CNTL – CMD (wait 10 sec for system initialization)

 If ANALOG, On MCC GO:
 | VID OUT DNLK pb – push
 | IN FLT DECK(MIDDECK) pb – push

 If SD DTV, On MCC GO:
L10 (MUX) √CABLES CONNETED
 MUX/VTR/CC PWR – on (LED on)
 √MUX BYPASS – ACT
 (VIP) PWR – on (LED on, DATA FLOW LED flashes twice)
 (VTR) √ON/STANDBY LED – green
 √INPUT SELECT – VIDEO



A7 VID OUT DTV pb – push
 IN FLT DECK(MIDDECK) pb – push

L10 (MUX) √CHANNEL 3 DATA LED – on
 When dnlk complete:


CC PWR dial – OFF
Worklights PWR – OFF
O19 TV PWR – OFF
L10 (MUX) MUX/VTR/CC PWR – off(LED off)
 Go to DEACTIVATION (Cue Card, TV) as reqd

CANON G1 (Continued)

HD DIGITAL CC DNLK

- Notify MCC, configuring for HD TV dnlk
- Config H/W per dwg at right
- CC For cable strain relief attach MPC-to-G1 Cable Velcro strap to CC strap
- AVIU SYNC/VIDEO – VIDEO
HI-Z/75 – 75
PWR SELECT – LO
- O19 √TV PWR – ON
- CC √Wide Conversion Lens installed
Install LAV MIC
√ND FILTER – OFF
√OUTPUT – CAM
√ – 
√STANDBY/LOCK – STANDBY

PWR dial – "green"
If rec to tape
Tape – Install
√Viewfinder (LCD) display "green" •||
Mount w/Multiuse Bracket, Clamp as reqd
- L10 (MUX) √MUX/VTR/CC PWR – on (LED on)
√MUX BYPASS – ACT
√CHANNEL 0,1 RATE SEL – 1
 √2 RATE SEL – 8
- (VTR) ON/STANDBY pb – push (LED red)
(VIP) PWR – off (LED off)
- O19 DC UTIL PWR MNA – ON
MPC PWR SPLY DC PWR SPLY PWR SW1 – ON
- MPC PWR-ON (HDV, TAXI, 5V, 3V green LEDs on)

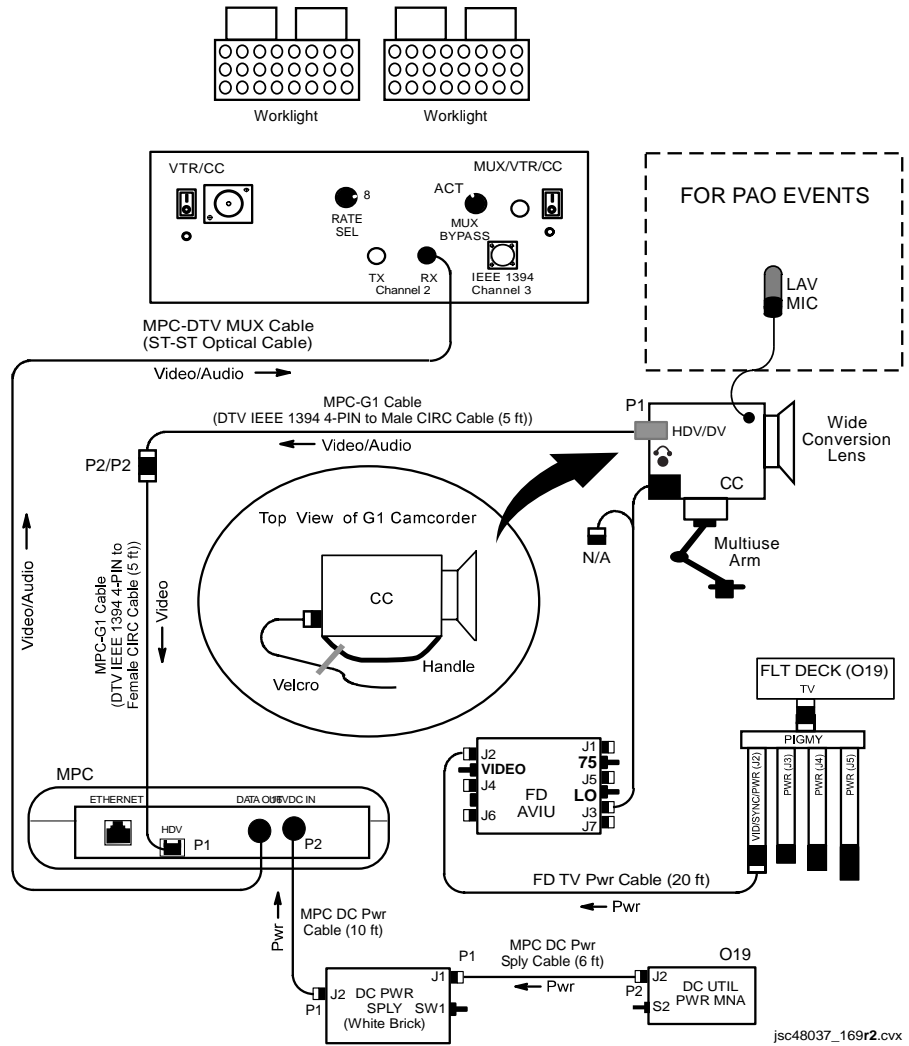

CANON G1 (Continued)

HD DIGITAL CC DNLK (Continued)

L10 (MUX) √CHANNEL 2 F/O OK, DATA LEDES on

CAUTION

Due to temp constraints, worklights at full
pwr for 60 min; 90% pwr for unlimited time

Worklights Install fresh BATTs
Mount light(s) w/Brackets (Velcro/tape)
PWR – as reqd

Cabin Lts Flt Deck – ON
Lts in FOV – OFF as reqd
Lt Shades – install as reqd
Window Shades – install as reqd

CC √Scene composition

Adjust Camr angle for best framing

LAV MIC PWR – ON (talk), OFF (listen)

√MCC if BLACK VIDEO and COLOR BARS reqd

CC If reqd:
 PWR dial – AV
 APERTURE – CLOSE (AFT RING)
 √Av CLOSE displayed on top left of LCD
 AGC – OFF
 √GAIN sw – L
 √± Odb displayed on LCD
 OUTPUT – BARS

When MCC says done w/bars:
 OUTPUT – CAM

When MCC says done w/black screen test:
 PWR dial – “green”

	When dnk complete:
CC	PWR dial – OFF
Worklights	PWR – OFF
O19	TV PWR – OFF as reqd
MPC	PWR – OFF
PWR	DC PWR SPLY PWR SW1 – OFF
SPLY	
O19	DC UTIL PWR MNA – OFF
L10 (MUX)	MUX/VTR/CC PWR – off (LED off)
(VIP)	PWR – on (LED on, DATA FLOW LED flashes, twice)
(VTR)	ON/STANDBY pb – push (LED green)
	Notify MCC, returned to SD DTV dnk
	Go to DEACTIVATION (Cue Card, <u>TV</u>) as reqd

This Page Intentionally Blank

CANON G1 (Continued)


CC BATT CHARGING

1. Config H/W per dwg below
- AVIU
2. SYNC/VIDEO – VIDEO
HI-Z/75 – 75
PWR SELECT – HI

NOTE

When batt charger not in use, remove pwr

- O19
(MO58F)
3. √TV PWR – ON
 4. Insert Batt in charger. Check charger LED for charge status (~2 hr)

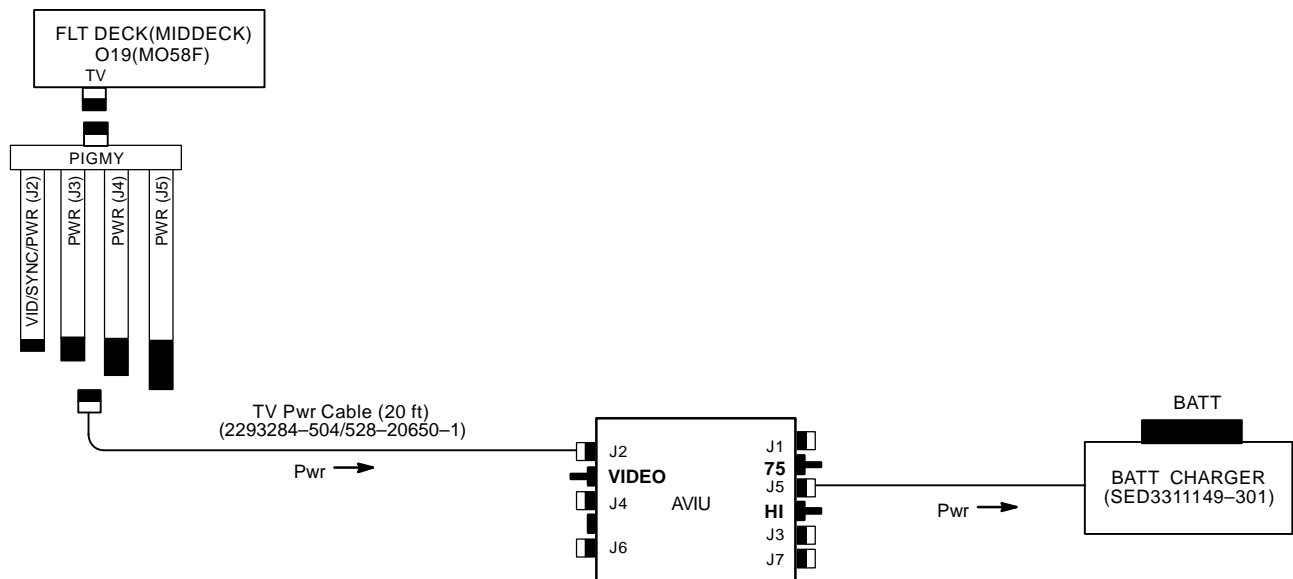

jsc48037_093.cnv

CANON G1 (Continued)

G1 TO G1 VIA FIREWIRE

Config H/W per dwg at right

AVIU (two)

SYNC/VIDEO – VIDEO
 HI-Z/75 – 75
 PWR SELECT – LO

PLBK CC

PWR dial – VTR/PLAY
 Install source tape. Protect Tab – slide (red visible)
 Cue tape to desired take via FF(REW) pb
 PLAY pb – push
 || pb – push

RCD CC

PWR dial – VTR/PLAY
 Install new tape
 REC pb – push
 || pb – push

PLBK CC

Perform following for each video segment:

|| pb – push (To PLAY)

RCD CC

|| pb – push (To REC)

When EDIT segment complete:

PLBK CC

|| pb – push (PAUSE)


RCD CC

|| pb – push (PAUSE)

When complete:

STOP pb – push simo

Cue to next starting point and repeat as reqd

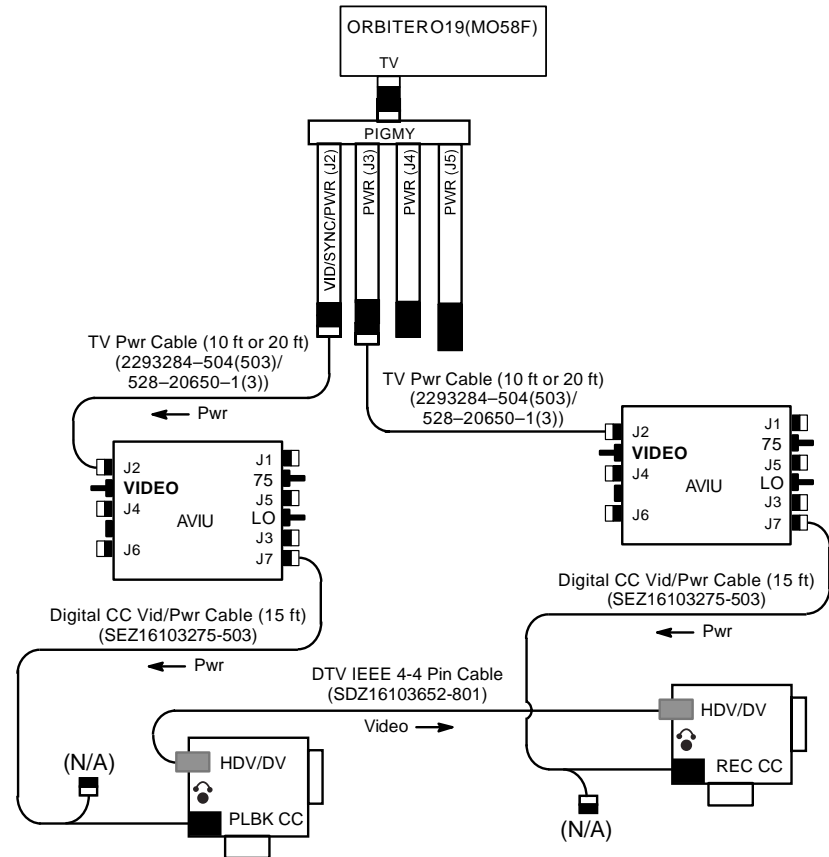


jsc48037_170r1.cvx

CANON G1 (Continued)

G1 TO V10 VIA FIREWIRE

- Config H/W per dwg at right
- AVIU (two) SYNC/VIDEO – VIDEO
HI-Z/75 – 75
PWR SELECT – LO
- CC PWR dial – VTR/PLAY
Disconnect DTV IEEE 4-4 Pin Cable
MENU pb – push
SELECT/SET:
 Sel 'SIGNAL SETUP'
 HD DOWN-CONV – ON
MENU pb – push
Reconnect DTV IEEE 4-4 Pin Cable
Install source tape. Protect Tab – slide (red visible)
Cue tape to desired take via FF(REW) pb
PLAY pb – push
|| pb – push
- V10 PWR – ON
DISPLAY pb – push
Install new tape
REC (two) pb – push simo
PAUSE pb – push
- CC Perform following for each video segment:
|| pb – push (To PLAY)
- V10 PAUSE pb – push (To REC)
- CC When EDIT segment complete:
|| pb – push (PAUSE)
- V10 PAUSE pb – push (PAUSE)
- When complete:
STOP pb – push simo
Cue to next starting point and repeat as reqd

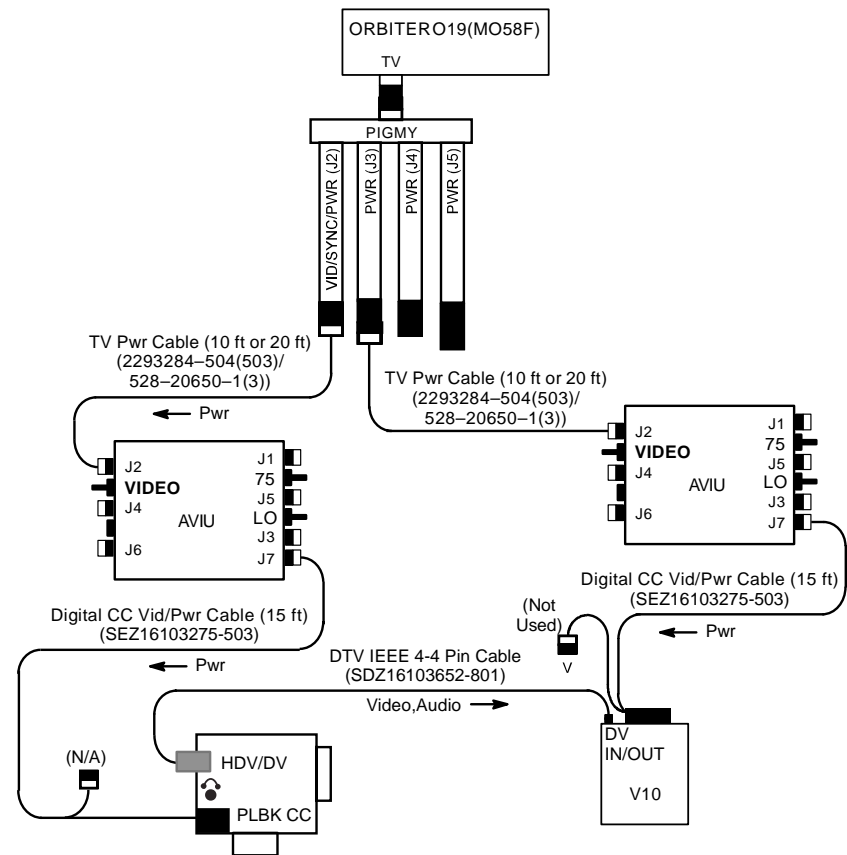

jsc48037_171r1.cvx

CANON G1 (Continued)

G1 TO V10 VIA ORBITER TV SYSTEM

Config H/W per dwg at right
 ✓Orbiter in async mode
 Perform ACTIVATION (Cue Card, TV)

AVIU

SYNC/VIDEO – VIDEO
 HI-Z/75 – 75
 PWR SELECT – LO

O19(MO58F)

✓TV PWR – ON

CC

PWR dial – VTR/PLAY
 ✓AV1/V2 – V2
 Install source tape, Protect Tab – slide (red visible)
 Cue tape to desired take via FF(REW) pb
 PLAY pb – push
 || pb – push

V10

PWR – ON
 DISPLAY pb – push
 Install new tape
 REC pb – push
 PAUSE pb – push

A7

VID OUT MON 1(2) pb – push
 IN FLT DECK(MIDDECK) pb – push

CC

Perform following for each video segment:
 || pb – push (To PLAY)

V10

PAUSE pb – push (To REC)


When EDIT segment complete:

CC

|| pb – push (PAUSE)

V10

PAUSE pb – push (PAUSE)

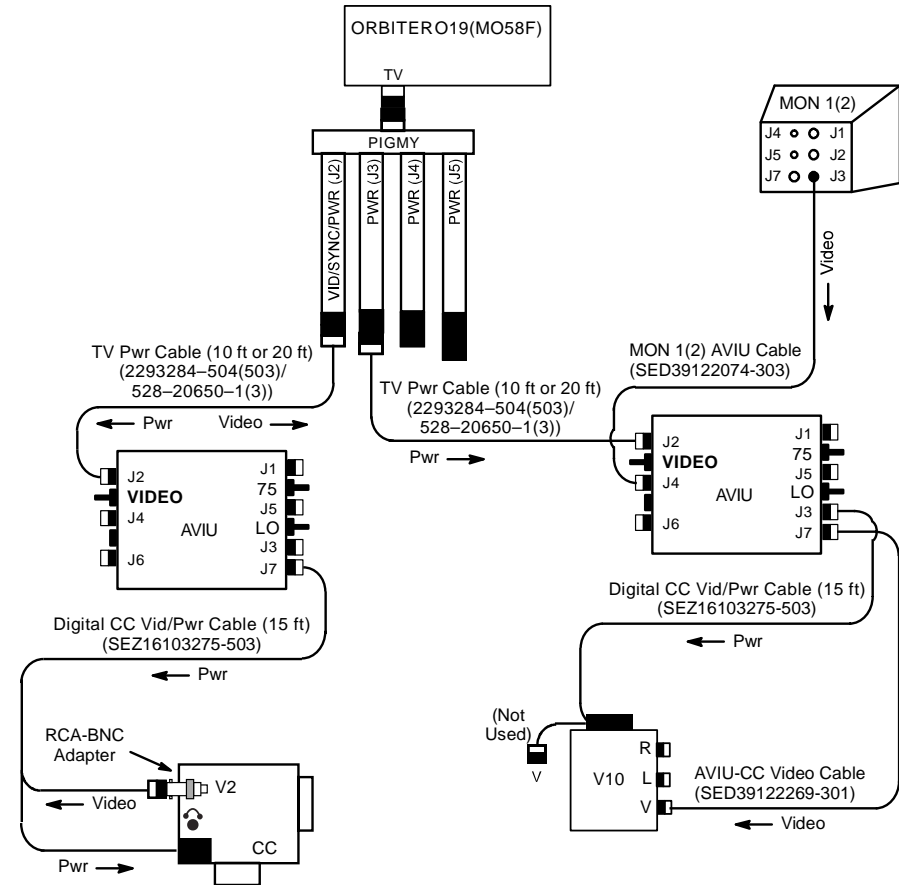


jsc48037_172r1.cvx

CANON G1 (Continued)

G1 TO DSR-25 VTR

- Config H/W per dwg at right
- L10 (MUX)
(VTR) √VTR/CC PWR – on (LED on)
 √ON/STANDBY LED – green
 INPUT SELECT – DV
 Install new tape
 REC pb – push,hold
 PLAY pb – push, simo (red dot displayed on LCD)
 PAUSE pb – push
- CC PWR dial – VTR/PLAY
 Disconnect DTV IEEE 1394 Cable
 MENU pb – push
 SELECT/SET:
 Sel 'SIGNAL SETUP'
 HD DOWN-CONV – ON
 MENU pb – push
 Reconnect DTV IEEE 1394 Cable
 Install source tap, Protect Tab – slide (red visible)
 Cue tape to desired take via FF(REW) pb
 PLAY pb – push
 || pb – push
- CC Perform following for each video segment:
L10 (VTR) || pb – push (To PLAY)
 PAUSE pb – push (To REC)
 When EDIT segment complete:
CC || pb – push (PAUSE)
L10 (VTR) PAUSE pb – push (PAUSE)
- When complete:
 INPUT SELECT – VIDEO
 Remove,mark tape
 ON/STANDBY pb – push (red LED on)
 Remove, stow IEEE 1394 female cable
 VTR/CC PWR – off (LED off) as reqd
(MUX) Reconnect IEEE 1394 male cable to IEEE 1394 connector

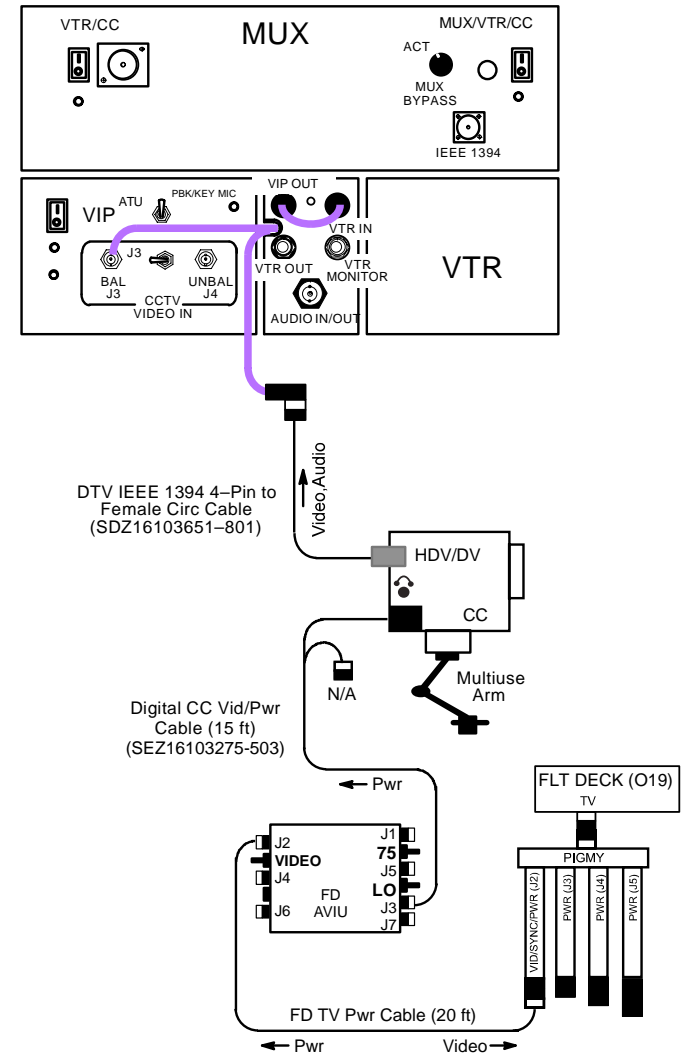


jsc48037_173r1.cvx

CANON G1 (Concluded)

SINGLE CAMCORDER W/CAMCORDER MICROPHONE

- Config H/W per dwg at right
 - AVIU SYNC/VIDEO – VIDEO
HI-Z/75 – 75
PWR SELECT – LO
 - O19(MO58F) ✓TV PWR – ON
 - CC ✓Wide Conversion Lens installed
✓ND FILTER – OFF
✓AF/M – AF
✓AGC – OFF
✓GAIN – L(M)
✓OUTPUT – CAM
✓AWB – ON
✓A/V1/V2 – V2
✓ .. -
✓STANDBY/LOCK – STANDBY
PWR dial – A
✓CP1(2-9) displayed on LCD (VIEWFINDER)
Tape – Install
✓Viewfinder (LCD) displays “green” •||
Multiuse Brkt, Clamp
 - Lav Mic ON/OFF – ON
- CAUTION**

Due to temp constraints, worklights at full pwr for 60 min; 90% pwr for unlimited time
- Worklights Install fresh BATTs
Mount light(s) w/Brackets (Velcro/tape)
PWR – as reqd
 - Cabin Lts Flt Deck(Middeck) – ON
Lts in FOV – Off as reqd
Lt Shades – install as reqd
 - CC ✓Scene Composition
Adjust Camr for best framing
✓Audio Quality

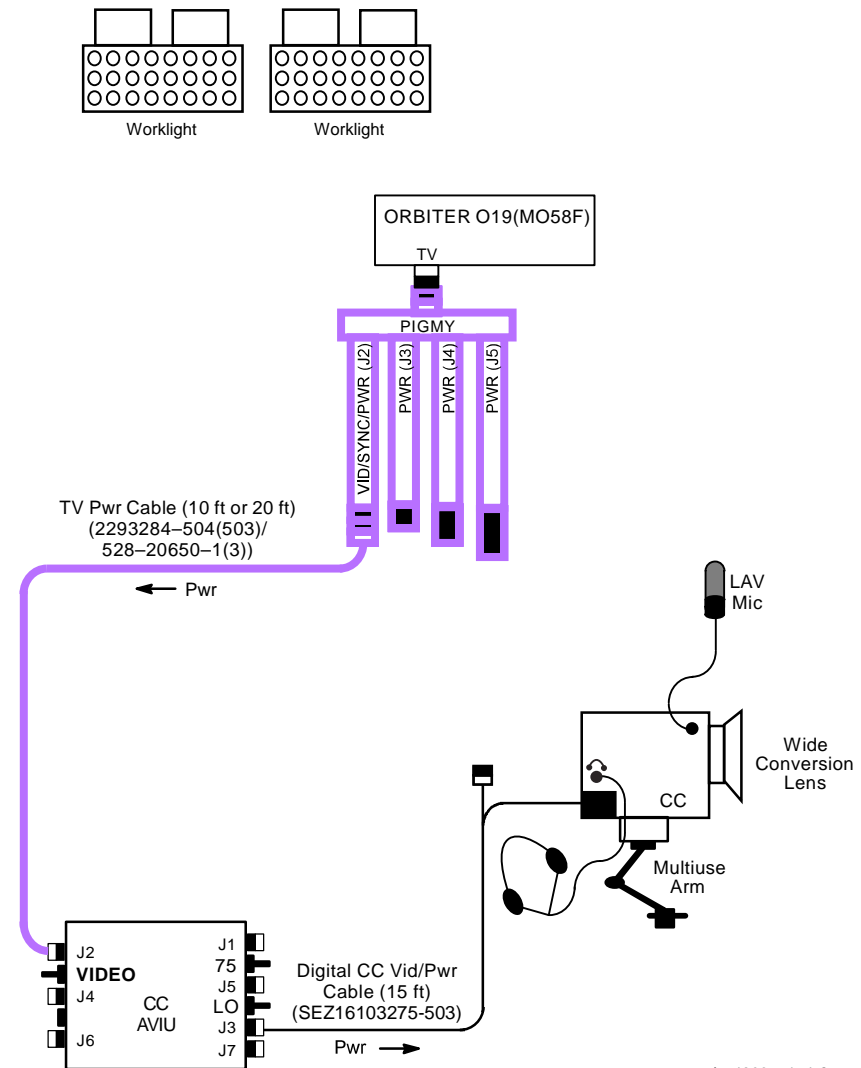

jsc48037_174r2.cvx

SONY V10

	<u>PAGE</u>
SPECIFICATIONS.....	8-2
NOMENCLATURE.....	8-3
NOMINAL MENU SETTINGS.....	8-5
V10 TO V10 VIA FIREWIRE.....	8-6

SONY V10

SONY V10



SPECIFICATIONS

TAPE: Mini DVCAM Cassette
TAPE LENGTH: 40 min
CD: Color, 5.5 in
AUDIO: 16 bit at 48 KHz
PWR: 7.2V Li-ION Batt Pack, 8.4V DC IN
BATT LIFETIME: ~60 min w/LCD closed
 ~30 min w/LCD open
BODY WEIGHT: 2.00 lb
BATT WEIGHT: 0.41 lb

SONY V10 (Continued)


NOMENCLATURE

- | | | |
|-------------------------------|----------------------------------|------------------|
| ① REC ORG TC Lamp | ⑫ REW (rewind) pb | ⑳ Headphone Jack |
| ② REC ORG TC pb | ⑬ LCD Screen | ㉑ EJECT sw |
| ③ TC Reset pb | ⑭ POWER sw | ㉒ Remote Sensor |
| ④ DISPLAY pb | ⑮ MENU pb, Control dial | ㉓ Power Lamp |
| ⑤ AUDIO DUB pb | ⑯ AUDIO Input/Output Jacks (R,L) | |
| ⑥ REC (recording) pb and Lamp | ⑰ RFU DC OUT Jack | |
| ⑦ SLOW pb | ⑱ VIDEO Input/Output Jack | |
| ⑧ PAUSE pb | ㉀ S VIDEO Input/Output Jack | |
| ⑨ PLAY (playback) pb | ㉁ LCD BRIGHT pb | |
| ⑩ FF (fast Forward) pb | ㉂ Speaker | |
| ⑪ STOP pb | ㉃ Volume pb | |

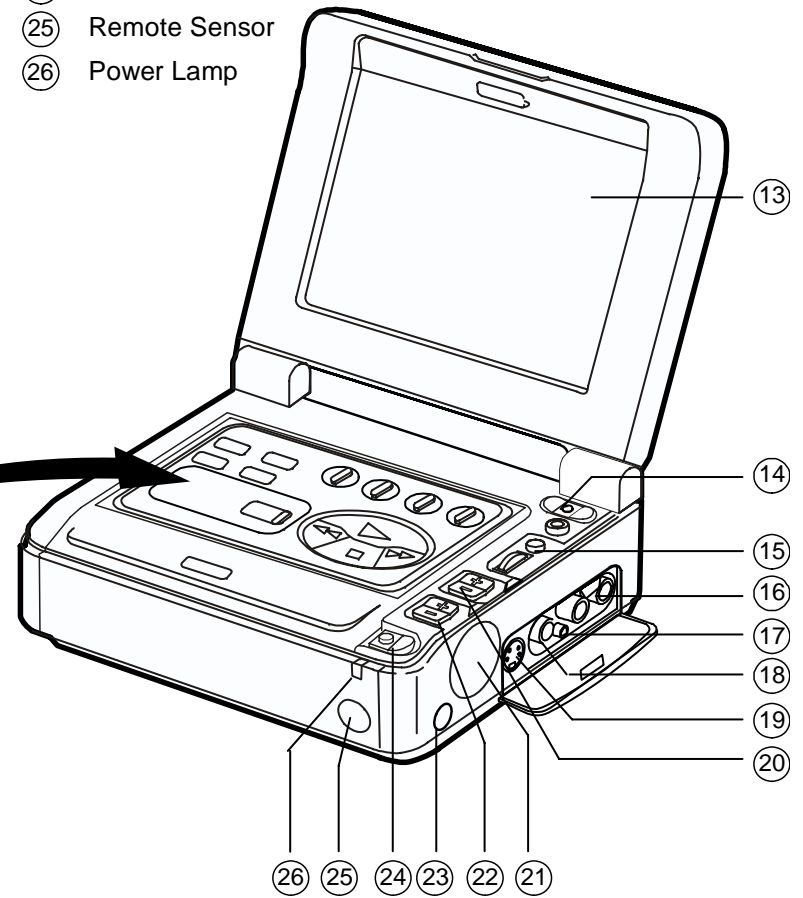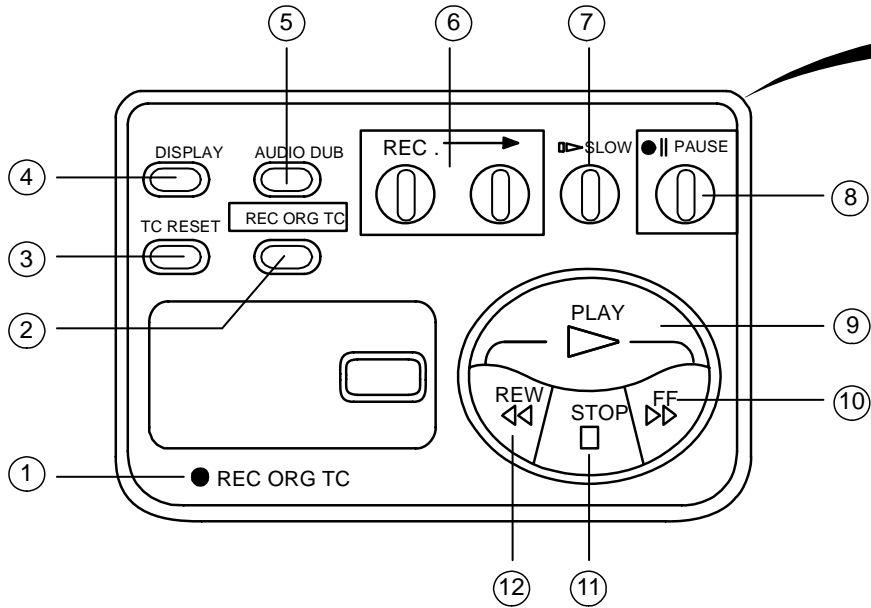

SONY V10 (Continued)

NOMENCLATURE (Concluded)

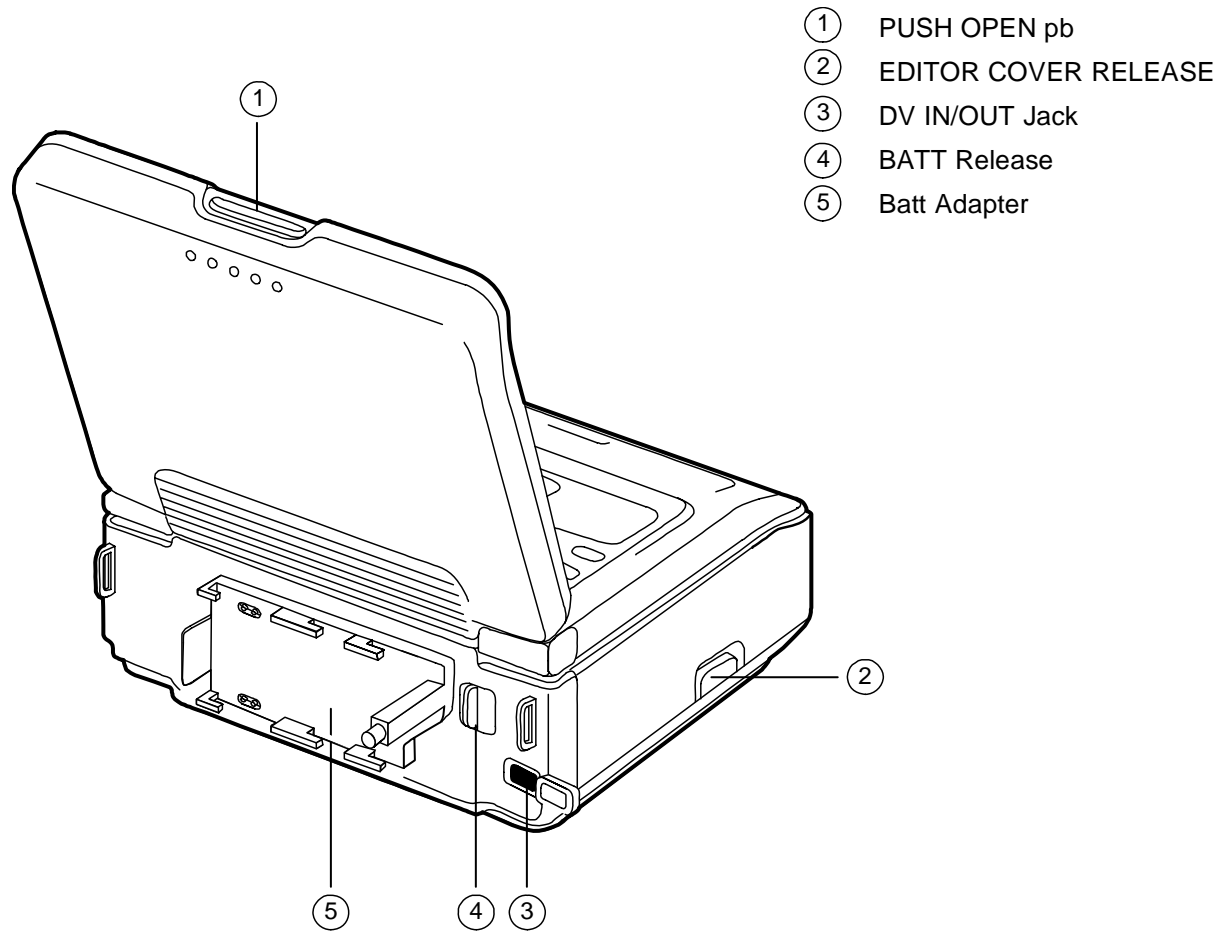

jsc48037_038.cnv

SONY V10 (Continued)

NOMINAL MENU SETTINGS


CMD – VTR4
HiFi SOUND – STEREO
AUDIO MODE – FS48K (non-default)
TIME CODE – DF
BEEP – ON
AUDIO MIX – “left” (ST1)
CM SEARCH – ON
DATA CODE – DATE/CAM
LCD COLOR – “center”
LCD HUE – “center”
DISPLAY – LCD
JOG AUDIO – OFF
CLOCK SET – set to GMT

SONY V10 (Concluded)

V10 TO V10 VIA FIREWIRE

Config H/W per dwg at right

- | | |
|----------|--|
| AVIU | SYNC/VIDEO – VIDEO
HI-Z/75 – 75
PWR SELECT – LO |
| PLBK V10 | PWR – ON
DISPLAY pb – push
Install source tape. Protect Tab – Slide (red visible)
PLAY pb – push
Cue tape to desired take
PAUSE pb – push |
| RCD V10 | PWR – ON
DISPLAY pb – push
Install new tape
REC pb – push
PAUSE pb – push |
| PLBK V10 | Perform following for each video segment:
PAUSE pb – push (To PLAY) |
| RCD V10 | PAUSE pb – push (To REC) |
| PLBK V10 | When EDIT segment complete:
PAUSE pb – push (PAUSE) |
| RCD V10 | PAUSE pb – push (PAUSE) |

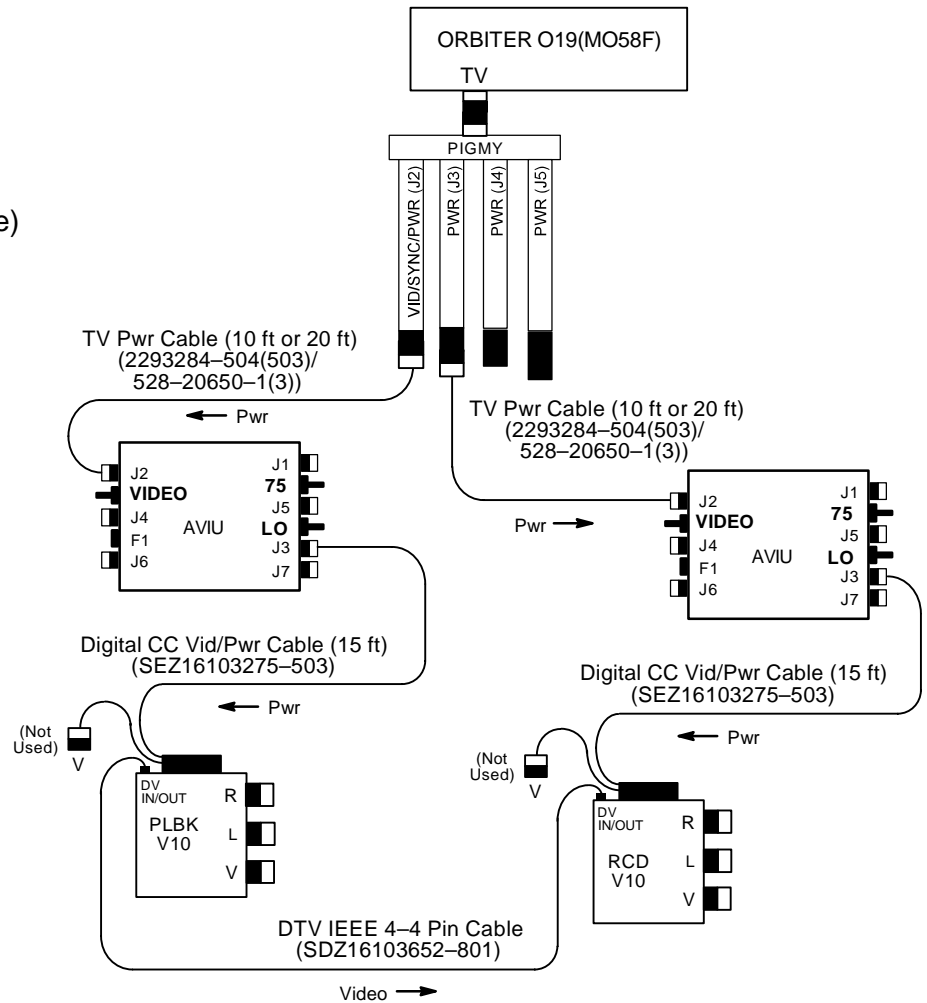


jsc48037_039r1.cvx

PORTABLE MONITORS

	<u>PAGE</u>
A31p VIDEO CONVERTER.....	9-2
VPU REPEATER.....	9-4

PORTABLE MONITORS

A31p VIDEO CONVERTER

- A31p
1. √A31p Pwr – ON
 2. Connect A31p Video Adapter to A31p VID IN “  ”
 3. Connect appropriate hardware from video source to A31p Video Adapter Cable depending on desired video source per table below


Video Source	Hardware (part #)	From	To	Cable Connections
PAYLOAD/DTV	• AVIU-CC Video Cable (15 ft) (SED39122269-301)	• L10A1 VTR OUT	• A31p Video Adapter	• BNC – RCA
Monitor 1(2) (option 1)	• Monitor to AVIU/CM Cable (20 ft) (SED39122074-303) • AVIU (SED33111493-302/303) • AVIU Video Cable Assy (SEZ33114239-301)	• Mon/J3 -----	• AVIU/J4 -----	• Circ – Twinax -----
		• AVIU/J5	• A31p Video Adapter	• Unique – RCA
Monitor 1(2) (option 2)	• Monitor to AVIU/CM Cable (20 ft) (SED39122074-303) • AVIU (SED33111493-302/303) • Balanced Video Cable (SED33105778-301) • Bal/Unbal Xfmr (SED39124190-301) • AVIU-CC Video Cable (15 ft) (SED39122269-301)	• Mon/J3 -----	• AVIU/J4 -----	• Circ – Twinax -----
		• AVIU/J6 • Balanced Video Cable • Bal/Unbal Xfmr	• Bal/Unbal Xfmr • AVIU-CC Video Cable • A31p Video Adapter	• Twinax – Twinax ----- • BNC – RCA
Monitor 1(2) (option 3)	• Monitor to AVIU/CM Cable (20 ft) (SED39122074-303) • AVIU (SED33111493-302/303) • AVIU-CC Video Cable (15 ft) (SED39122269-301)	• Mon/J3 -----	• AVIU/J4 -----	• Circ – Twinax -----
		• AVIU/J7	• A31p Video Adapter	• BNC – RCA
Monitor 1(2) (option 4)	• Monitor to AVIU/CM Cable (20 ft) (SED39122074-303) • Bal/Unbal Xfmr (SED39124190-301) • AVIU-CC Video Cable (15 ft) (SED39122269-301)	• Mon/J3 -----	• Bal/Unbal Xfmr -----	• Circ – Twinax -----
		• Bal/Unbal Xfmr	• A31p Video Adapter	• BNC – RCA

PORTABLE MONITORS (Continued)

A31p VIDEO CONVERTER (Concluded)

Video Source	Hardware (part #)	From	To	Cable Connections
ISS	<ul style="list-style-type: none"> • VPU Patch Cable (SED39136025-301) • Balanced Video Cable (SED33105778-301) • Bal/Unbal Xfmr (SED39124190-301) • AVIU-CC Video Cable (15 ft) (SED39122269-301) 	<ul style="list-style-type: none"> • VPU FROM ISS • VPU Patch Cable ----- • Bal/Unbal Xfmr 	<ul style="list-style-type: none"> • Balanced Video Cable • Bal/Unbal Xfmr ----- • A31p Video Adapter 	<ul style="list-style-type: none"> • Plug – Twinax • Twinax – Twinax ----- • BNC – RCA
Spare 1 (SSV)	<ul style="list-style-type: none"> • SSV to PDIP/CIP Cable (SED16103246-301) • Bal/Unbal Xfmr (SED39124190-301) • AVIU-CC Video Cable (15 ft) (SED39122269-301) 	<ul style="list-style-type: none"> • L11A2 PDIP/J107 ----- • Bal/Unbal Xfmr 	<ul style="list-style-type: none"> • Bal/Unbal Xfmr ----- • A31p Video Adapter 	<ul style="list-style-type: none"> • Circ – Twinax ----- • BNC – RCA
WVS	<ul style="list-style-type: none"> • AVIU-CC Video Cable (15 ft) (SED39122269-301) 	<ul style="list-style-type: none"> • R12A2 WIB XCVR1(2) UNBAL 	<ul style="list-style-type: none"> • A31p Video Adapter 	<ul style="list-style-type: none"> • BNC – RCA
PD100 Camc (option 1)	<ul style="list-style-type: none"> • PD100 A/V Adapter Cable (SEZ16103275-301) • RCA - RCA Cable (SED39122260-314) 	<ul style="list-style-type: none"> • PD100 A/V Port • A/V Adapter 	<ul style="list-style-type: none"> • RCA-RCA Cable (via female adapter) • A31p Video Adapter 	<ul style="list-style-type: none"> • Stereo – RCA • RCA – RCA
PD100 Camc (option 2)	<ul style="list-style-type: none"> • Y-C Cable (SED33104816-301) 	<ul style="list-style-type: none"> • PD100 S-Video Port 	<ul style="list-style-type: none"> • A31p Video In Port (No A31p Video Adapter) 	<ul style="list-style-type: none"> • S-Video – S-Video


4. Config H/W per dwg at right
5. Double-click Shuttle Apps > 'NASA Video Overlay'
6. ✓ 'NASA Video Overlay' window displayed
7. Sel 'Local Full Screen'
Press 'ESC' or 'W' key to minimize display as reqd

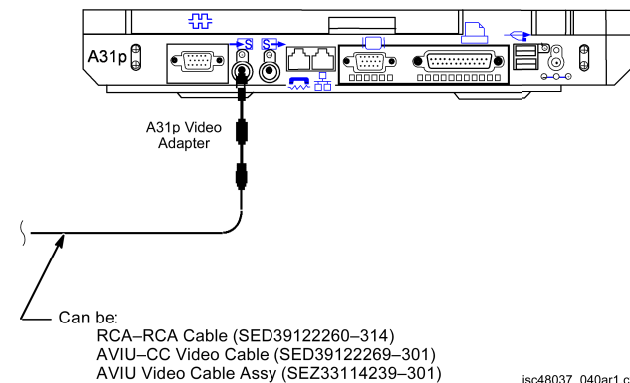

jsc48037_040ar1.cvx

PORTABLE MONITORS (Concluded)

VPU REPEATER

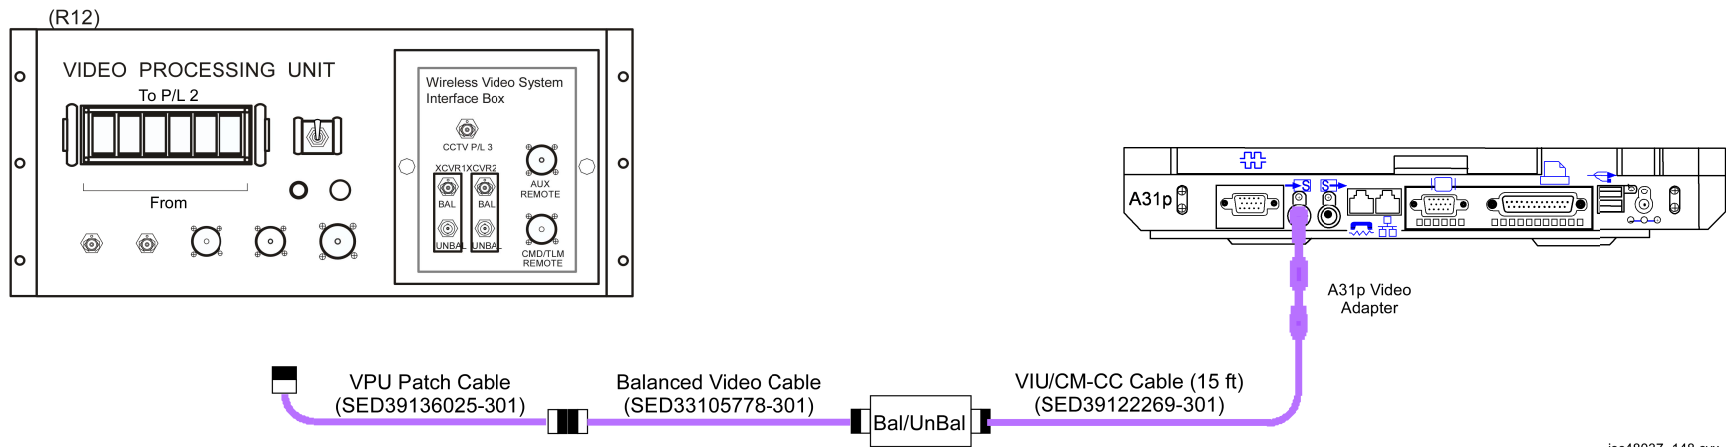

joc48037_148.cvx

CCTV

	<u>PAGE</u>
SPECIFICATIONS.....	10-2
LENS DATA.....	10-3
ILLUMINATOR DATA.....	10-3
CCTV SYSTEM OVERVIEW.....	10-4
VPU/WIB VIDEO ROUTING OVERVIEW	10-5
AVIU OVERVIEW.....	10-6
TVCU.....	10-7
PHOTO FLOODLIGHT	10-8
MALS.....	10-9
10.1 NO MONITOR PICTURE/MENU	10-9
10.2 NO CAMR VIDEO.....	10-16
10.3 NO VTR PLAYBACK VIDEO	10-18
10.4 NO CAMCORDER VIDEO ON COLOR TV MONITOR	10-20
10.5 RMS TV cb OPENS	10-24

CCTV

SPECIFICATIONS

CTVC (SOLID STATE)

EFFECTIVE IMAGE SIZE: 6.54mm X 8.62mm
PWR: 43.3W at 32V (all motors on)
ZOOM SPEED: End-to-End 8 sec
FOCUS SPEED: End-to-End 22 sec
IRIS: Auto(Manual) Close ~7 sec
WEIGHT: 18.9 lb
DIMENSION: 17" (L) x 6.4" (W) x 6.3" (H)

ITVC

EFFECTIVE IMAGE SIZE: 6.54mm X 8.62mm
PWR: 33.6W at 32V
ZOOM SPEED: End-to-End 8 sec
FOCUS SPEED: End-to-End 22 sec
IRIS: Auto close ~6 sec
WEIGHT: 17 lb
DIMENSION: 19.6" (L) (Includes 3.2" Lens) x 6.4" (W) x 6.3" (H)

CCTV (Continued)

LENS DATA

Lens/Focal Length		Aperture Range	Zoom Ratio	Minimum Focus Distance (ft)	Approximate Field of View (FOV)	
					Horizontal	Vertical
CTVC (COLOR)*	5.5mm-47mm	f/1.7 to f/16 (T2-T360)	8:1	1.0	75°-10°	61°-8°
ITVC (B/W)*	8.5mm-127mm	f/1.7 to f/16 (T2-T360)	15:1	3.0	53°-4°	41°-3°


ILLUMINATOR DATA

Color	LEDs	LED Deg Angles	Camr Type	Locations	Modes	Control
Red	120	8°/22°/8° *	ITVC	Bulkhead, Elbow, Keel	ON/OFF	cb CAMR HTR
	120	22°	ITVC	Bulkhead, Elbow, Keel	ON/OFF	cb CAMR HTR
White	40	44°	CTVC	Wrist	ON/OFF	cb CAMR HTR
	180	20°	CTVC/ITVC	Bulkhead, Elbow, Keel	ON/OFF	cb PAN/TILT HTR
	156	29°	Videospection	Keel	156 LED/84 LED/30 LED/OFF	SSP/CAMR HTR sw

*Three rings of LEDs:
 Inner,outer rings – 8° LEDs
 Middle ring – 22° LEDs

CCTV (Continued)


CCTV SYSTEM OVERVIEW

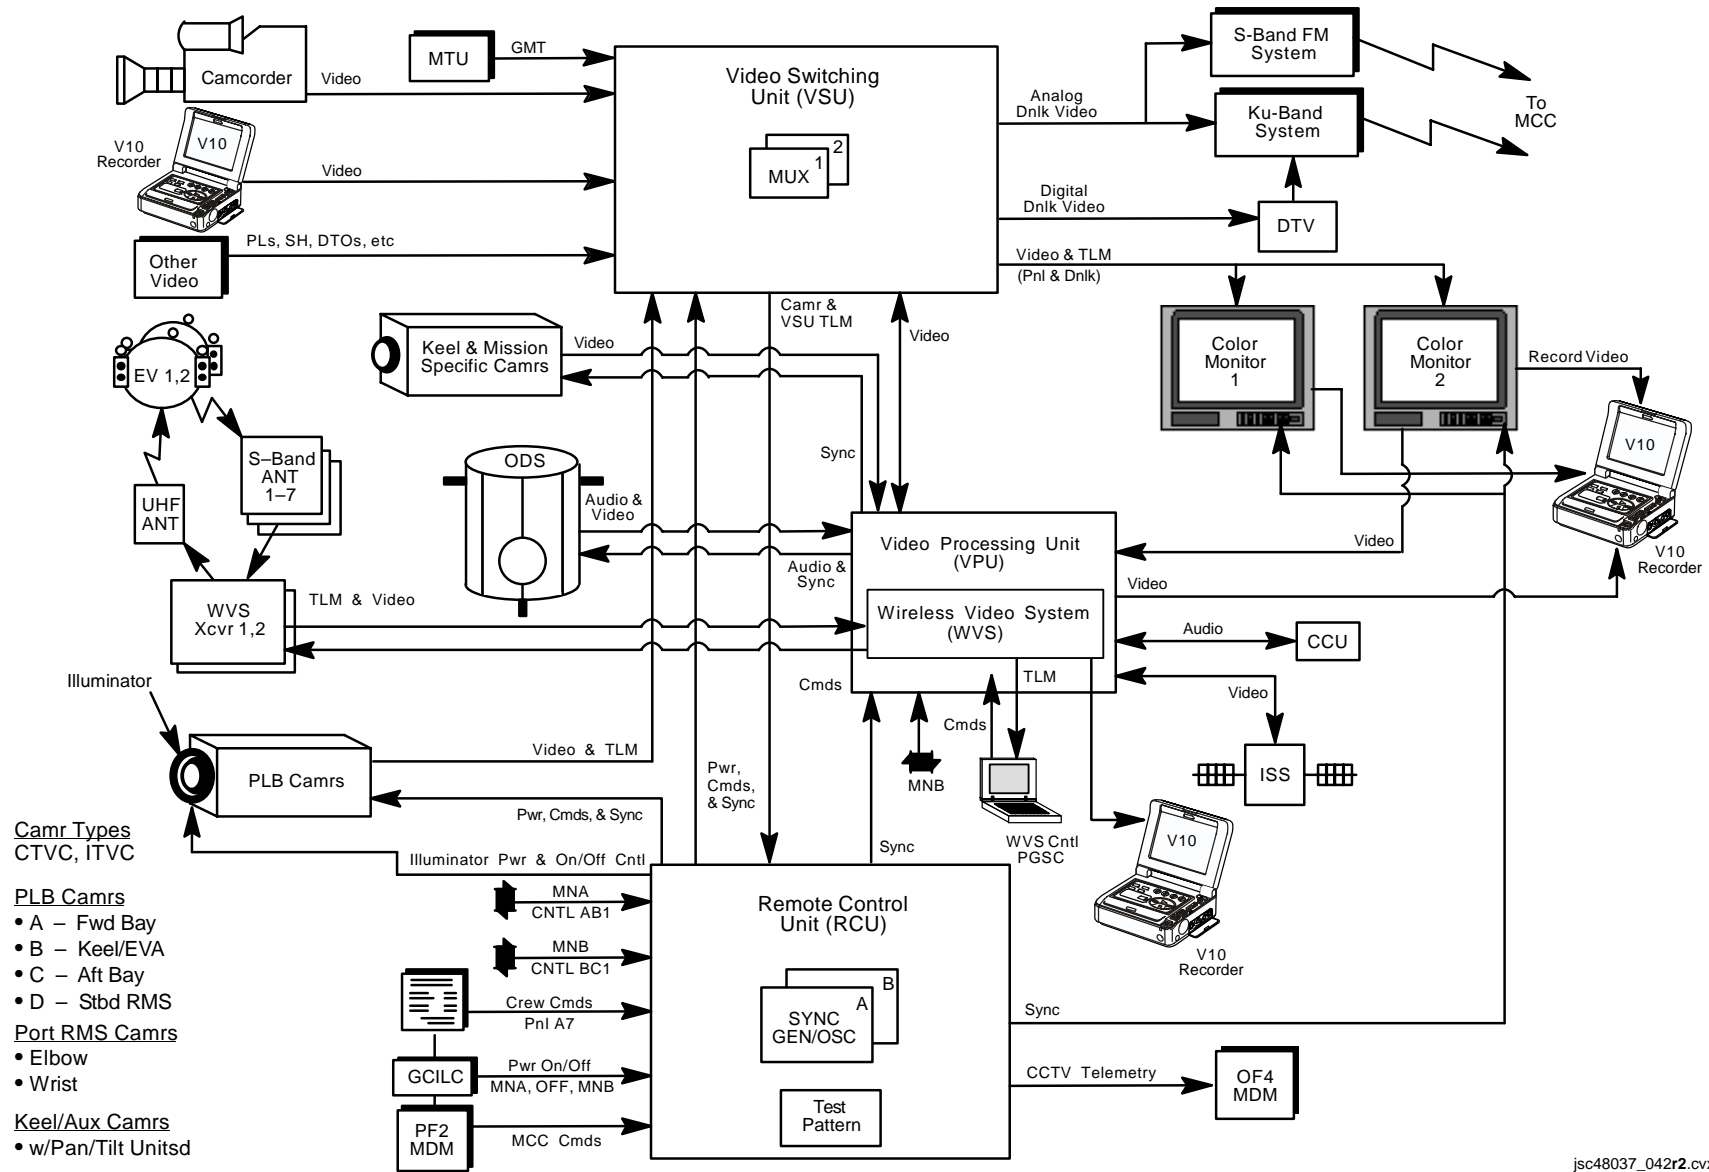

jsc48037_042r2.cvx

CCTV (Continued)


VPU/WIB VIDEO ROUTING OVERVIEW

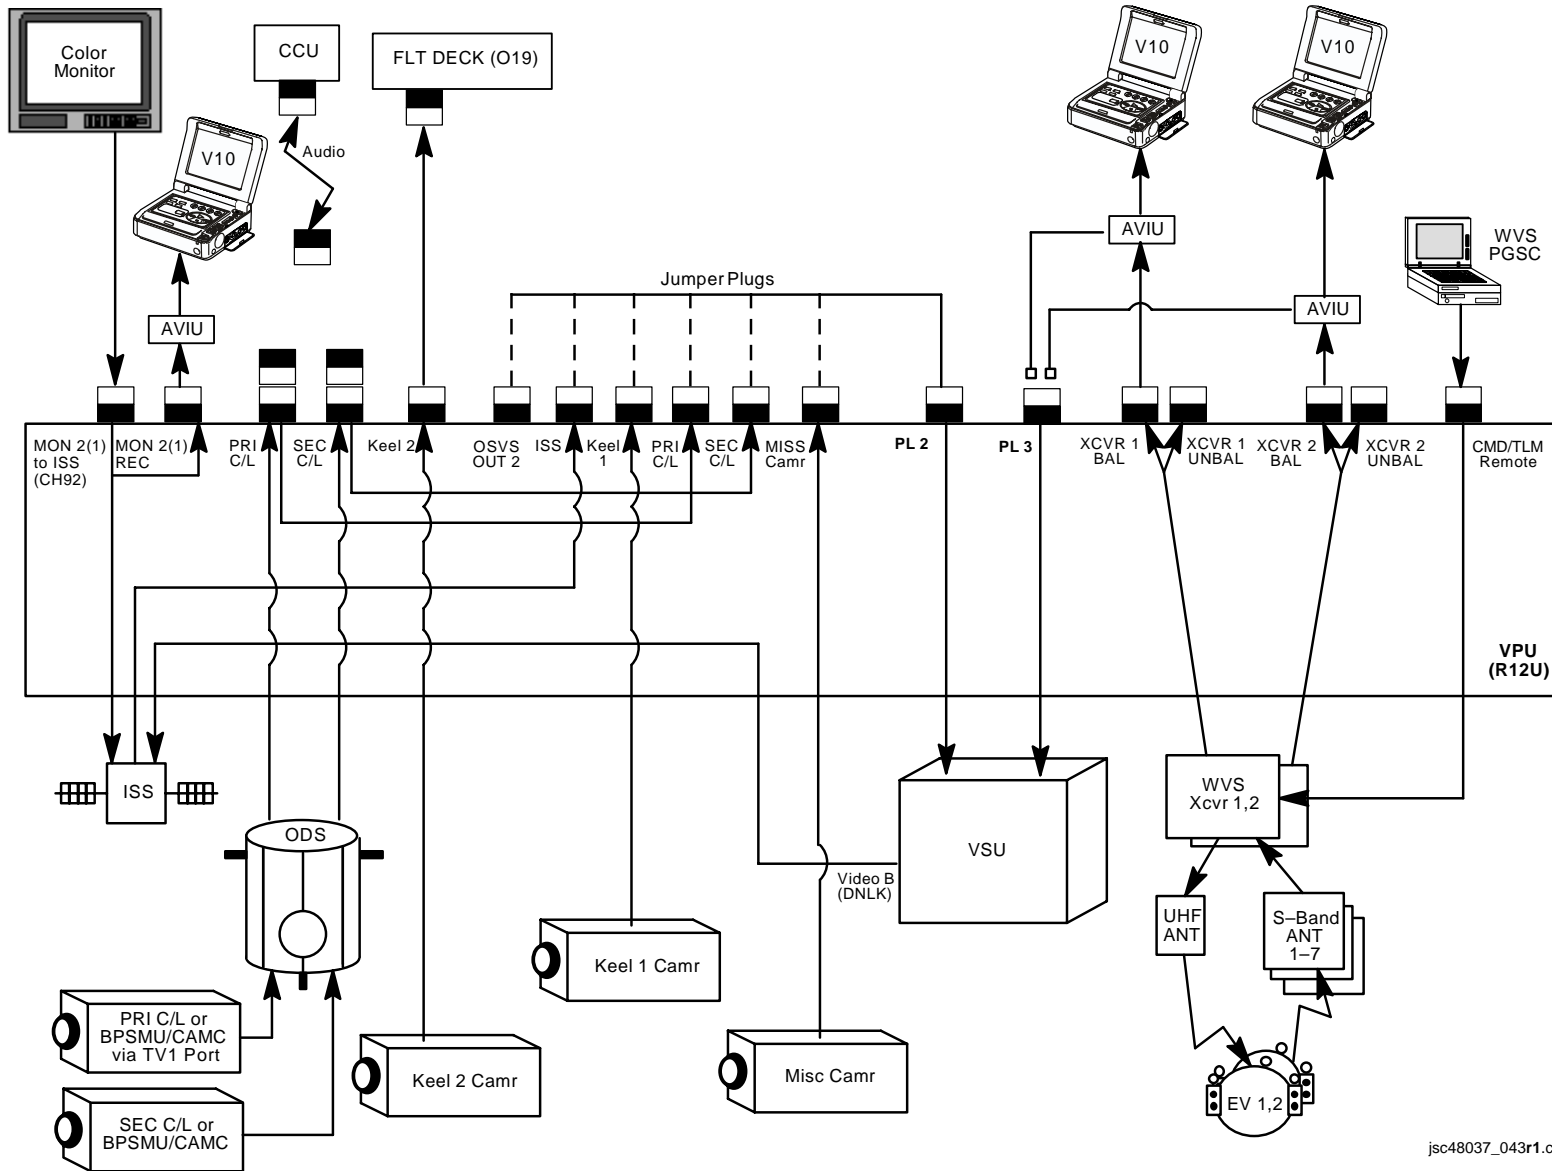

jsc48037_043r1.cvx

CCTV (Continued)

AVIU OVERVIEW

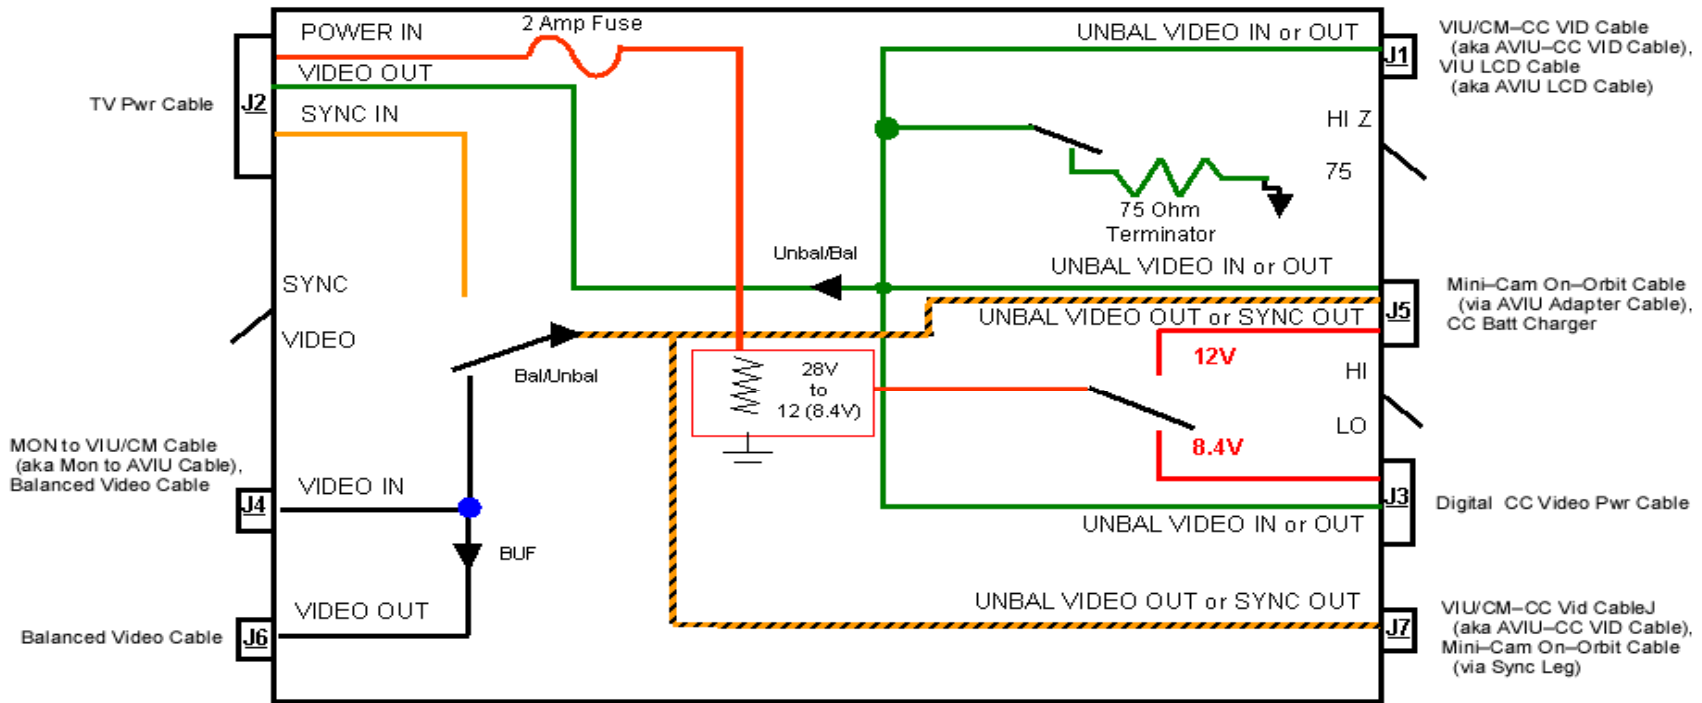

isc48037_044r1.cvx

J1

- Unbalanced Video Input(Output)

J2

- 28V Input
- Sync Input
- Balanced Video Output

J3

- 8.4V Power Output if HI/LO sw – LO
- Unbalanced Video Input(Output)

J4

- Balanced Video Input

J5

- 12V Power Output if HI/LO sw – HI
- Unbalanced Video Input(Output)
- Unbalanced Video Output (of J4 Balanced Input) if SYNC/VIDEO sw – VIDEO
- Sync Output if SYNC/VIDEO sw – SYNC

J6

- Balanced Video Signal Output (turnaround from J4)

J7

- Unbalanced Video Output (of J4 Balanced Input) if SYNC/VIDEO sw – VIDEO
- Sync Output if SYNC/VIDEO sw – SYNC

SYNC/VIDEO sw

- VIDEO – Unbalanced Video Output to J5,J7 from J4 Input
- SYNC – Sync Output to J5(J7) from J2 input


HI-Z/75 sw

- 75 – For nominal video output at J1
- HI-Z – For video output at J1 to a terminal source (i.e., PGSC, PD100, or V10)

HI/LO sw


- HI – 12V output at J5
- LO – 8.4V output at J3

CCTV (Continued)
TVCU

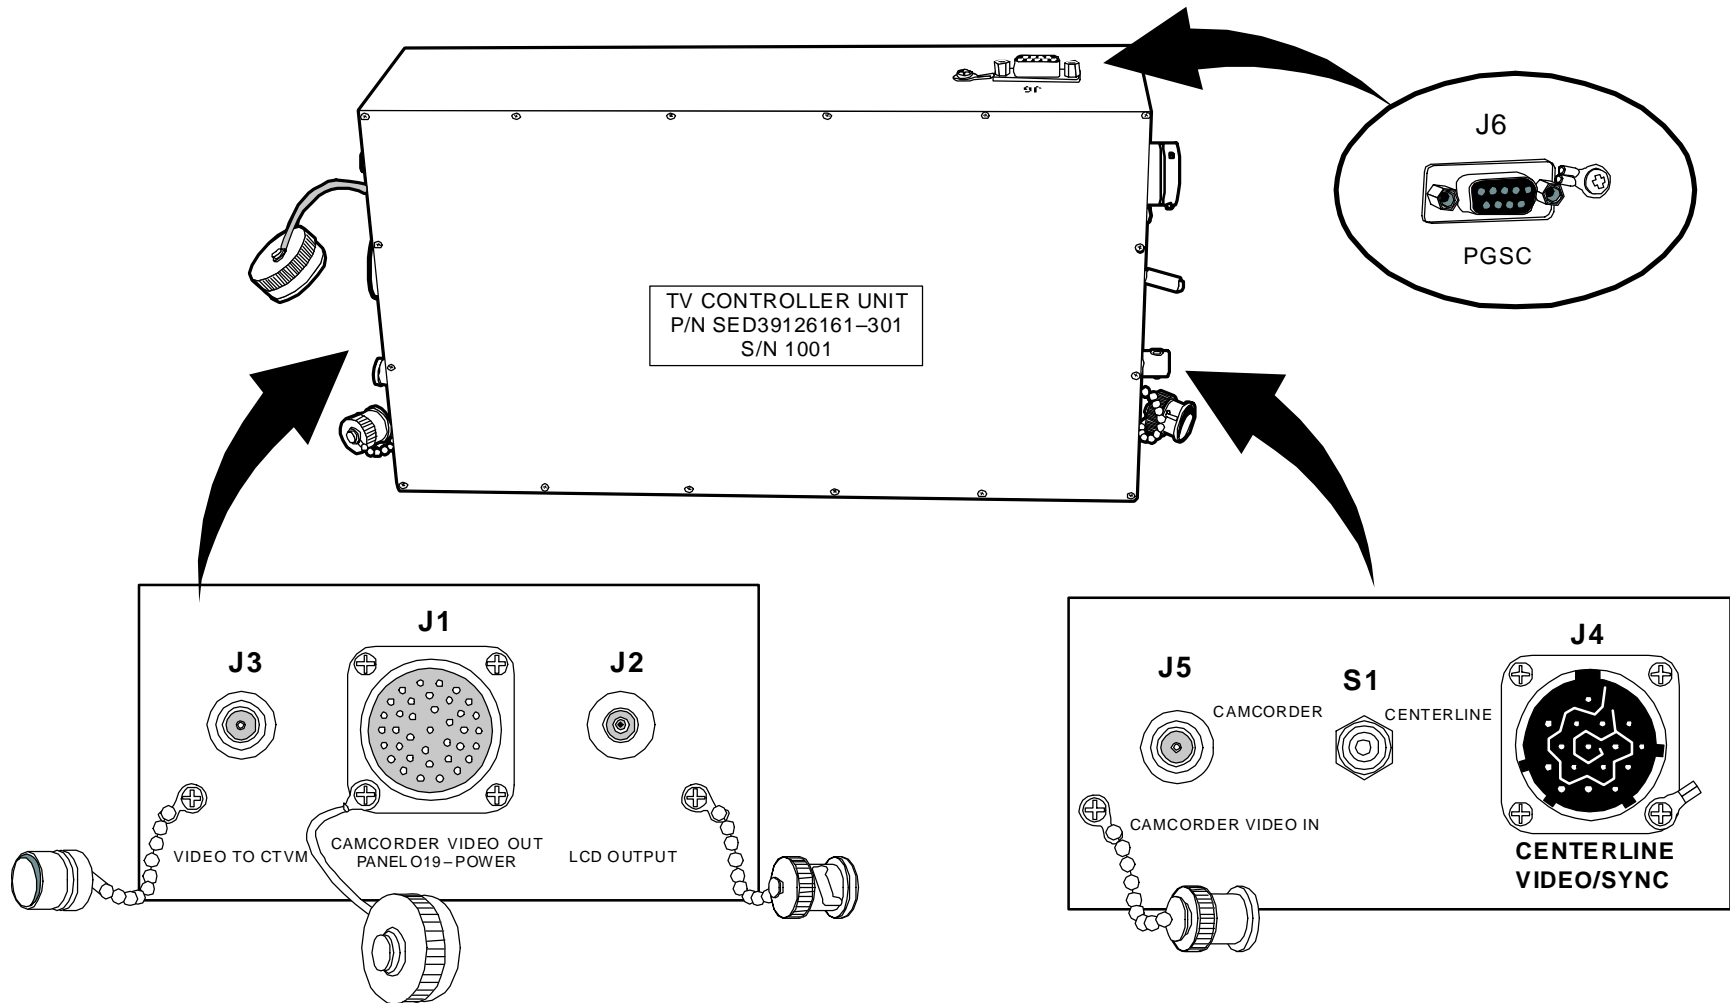

jsc48037_045.cnv

CCTV (Continued)
PHOTO FLOODLIGHT

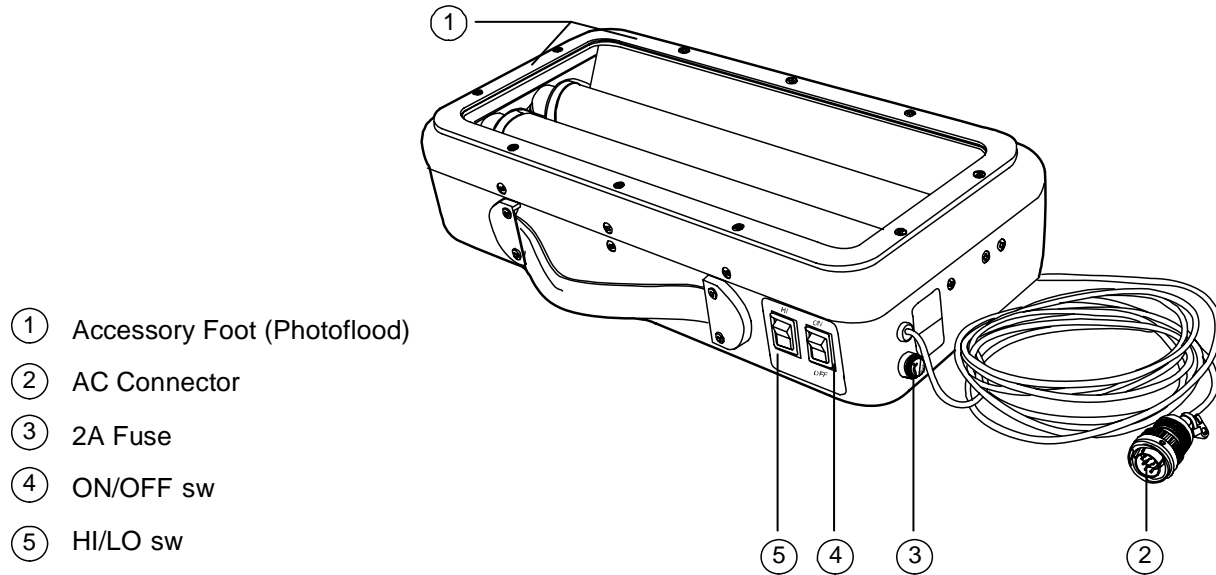

jsc48037_047.cnv


CCTV

10.1 NO MONITOR PICTURE/MENU

No Picture on Monitor 1(2)


Nominal Config:

- (R14:D)
 cb MNA TV C AFT
 BAY CAMR/PAN-TILT - cl
 CAMR HTR - cl
 PAN-TILT HTR - cl
 cb MNA TV CONTR UNIT - cl
 cb MNA TV MON 1 - cl
 cb MNB TV A FWD BAY CAMR/PAN-TILT - cl
 CAMR HTR - cl
 PAN-TILT HTR - cl
 cb MNB TV CONTR UNIT - cl
 cb MNB TV MON 2 - cl
 cb MNC TV B KEEL/EVA CAMR/PAN-TILT - cl
 CAMR HTR - cl
 PAN-TILT HTR - cl
 cb MNC TV CAB - cl
 (R14:E)
 cb MNA D STBD RMS TV CAMR/PAN-TILT - cl
 CMR HTR - cl
 PAN-TILT HTR - cl
 cb MNB RMS PORT RMS TV CAMR/PAN-TILT - cl
 CAMR HTR - cl
 PAN-TILT HTR - cl
 (A7U)
 TV PWR CNTL - CMD
 TV PWR CONTR UNIT - MNA(MNB)
 TV SYNC - NORM
 TV DNLK - ENA
 (A3)
 MON 1(2)
 SOURCE - as reqd
 SYNC - INT
 PWR - ON
 MODE - AUTO
 GUNS - R,G,B - ON

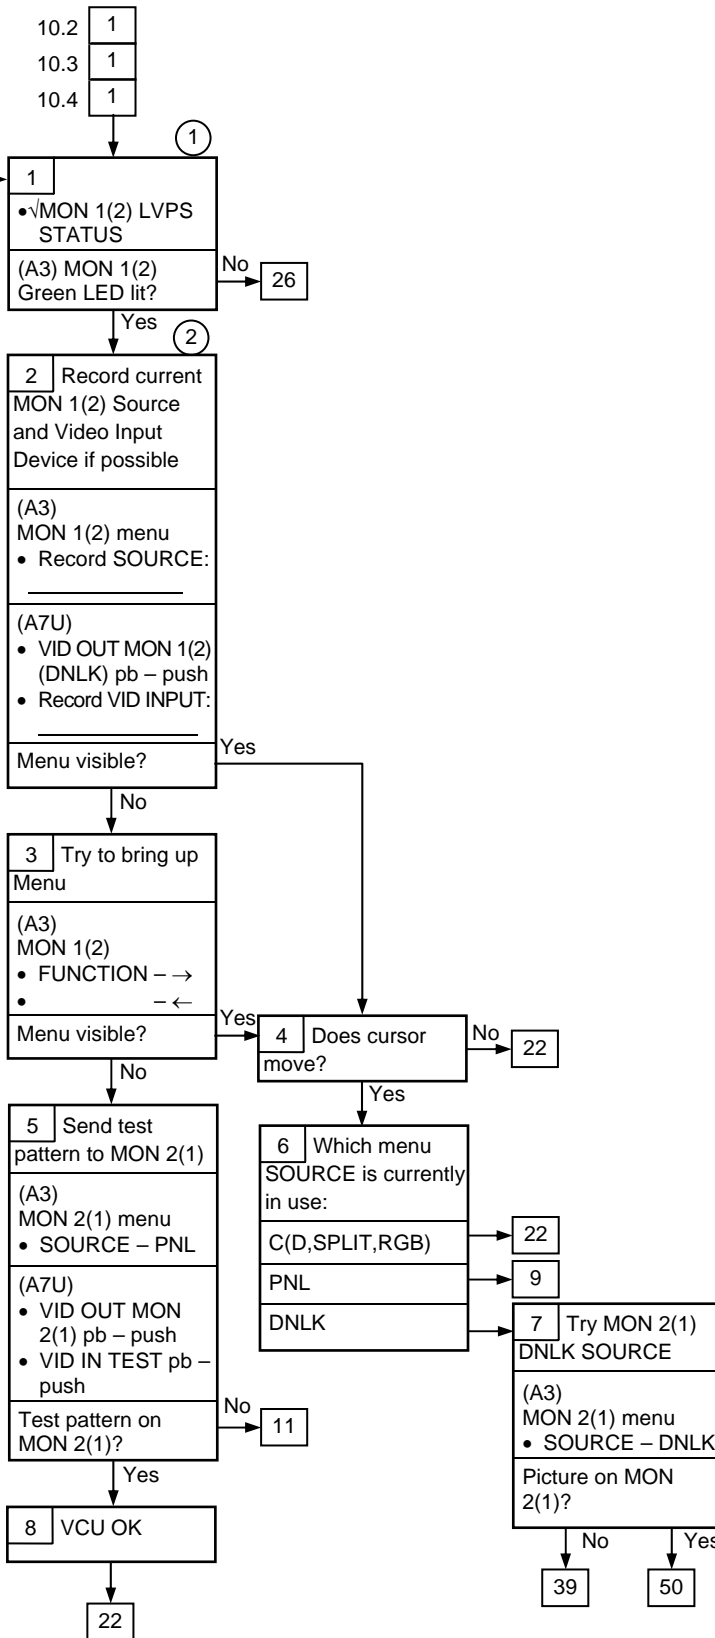

- ① LVPS = low voltage pwr supply
- ② Current SOURCE and INPUT recorded here will be used in subsequent mal blocks

CCTV 10.1 (Cont)

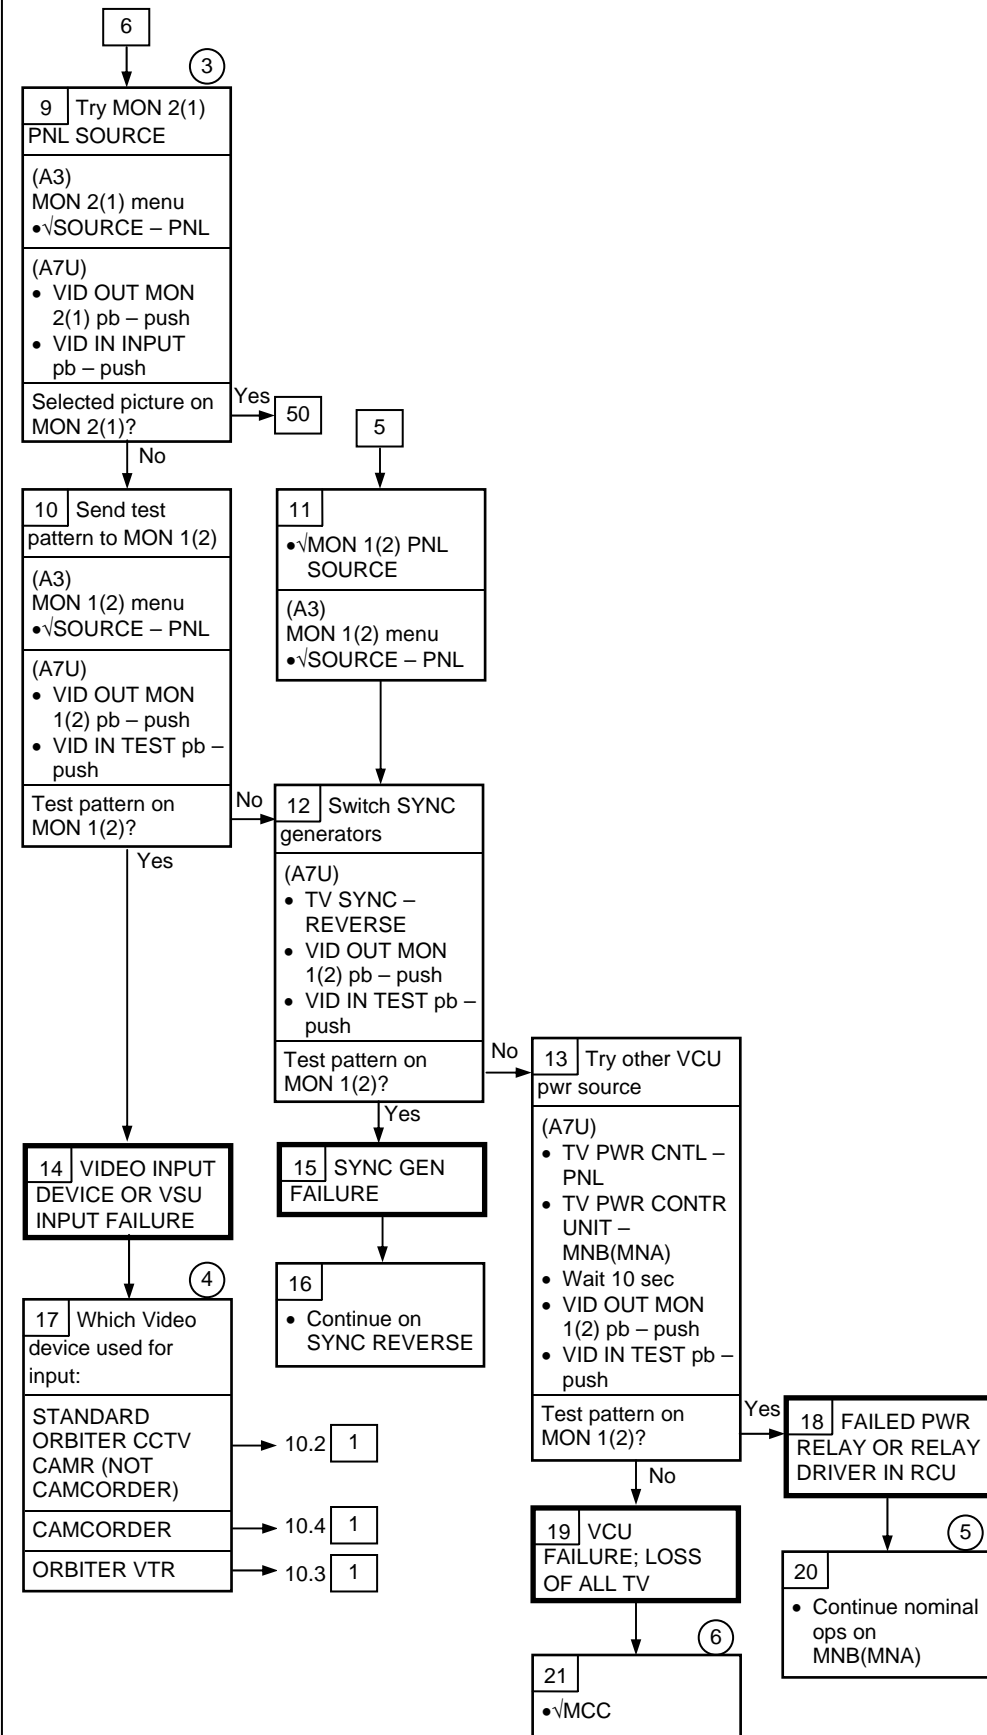


③ INPUT used here was recorded in block 2

④ Video Input Device is the device connected to INPUT which was recorded in block 2

⑤ All TV config in VCU will be lost. All camrs must be pwr'd up and reselected


⑥ Standalone MON 1(2) ops may be possible on inputs C,D, or RGB if connected and also if input SOURCE generates its own sync

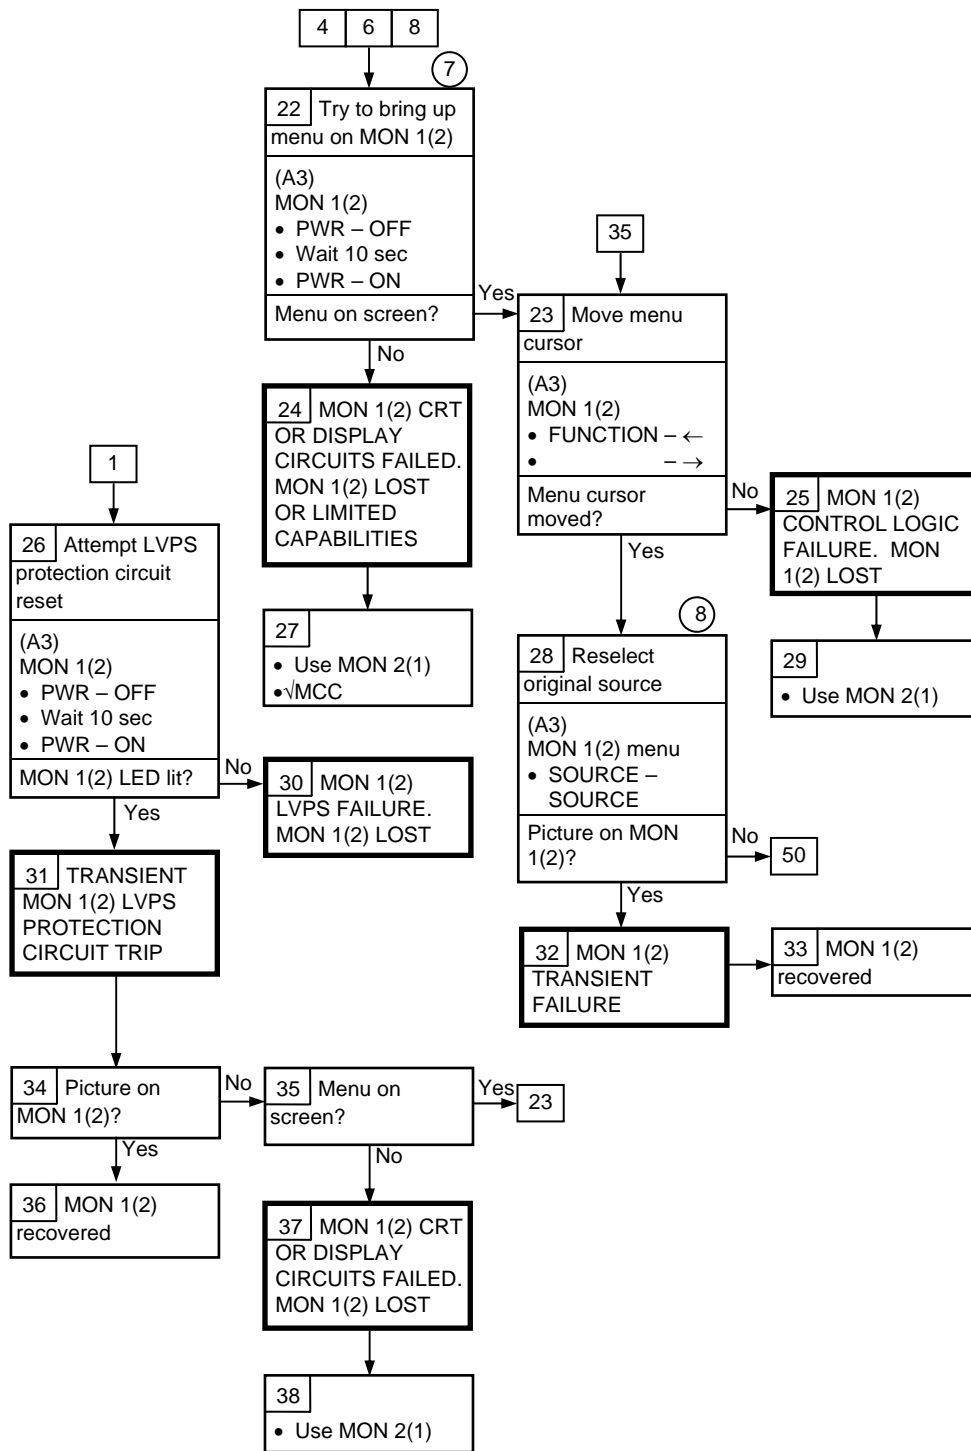

7
Brightness and contrast controls may need to be adjusted to see menu

8
SOURCE is the source recorded in block 2


CCTV 10.1 (Cont)

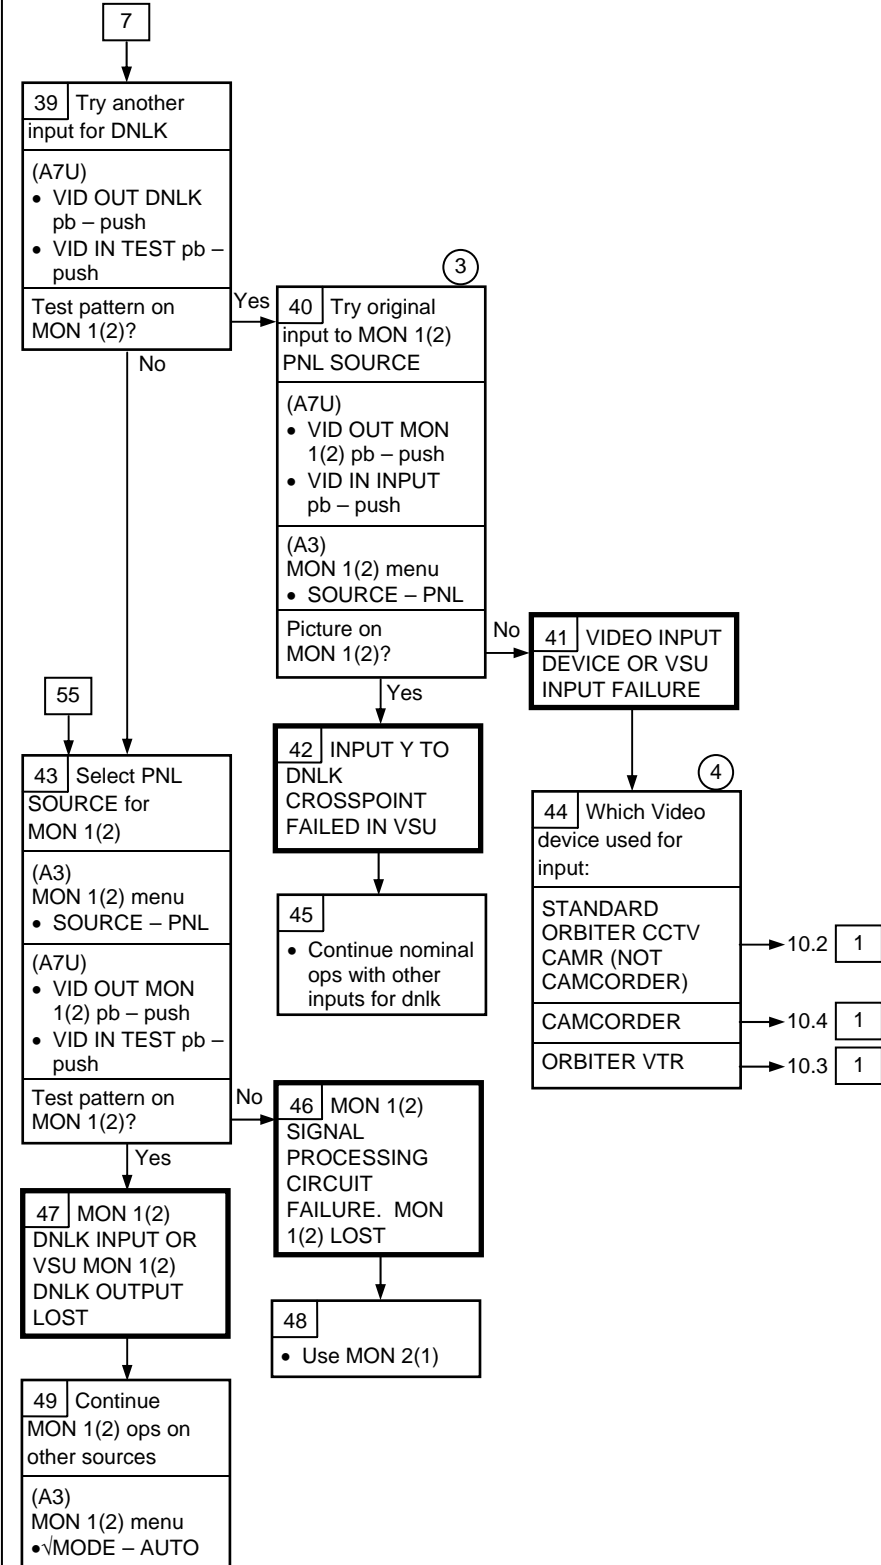

③ INPUT used here was recorded in block 2

④ Video Input Device is the device connected to INPUT which was recorded in block 2


CCTV 10.1 (Cont)

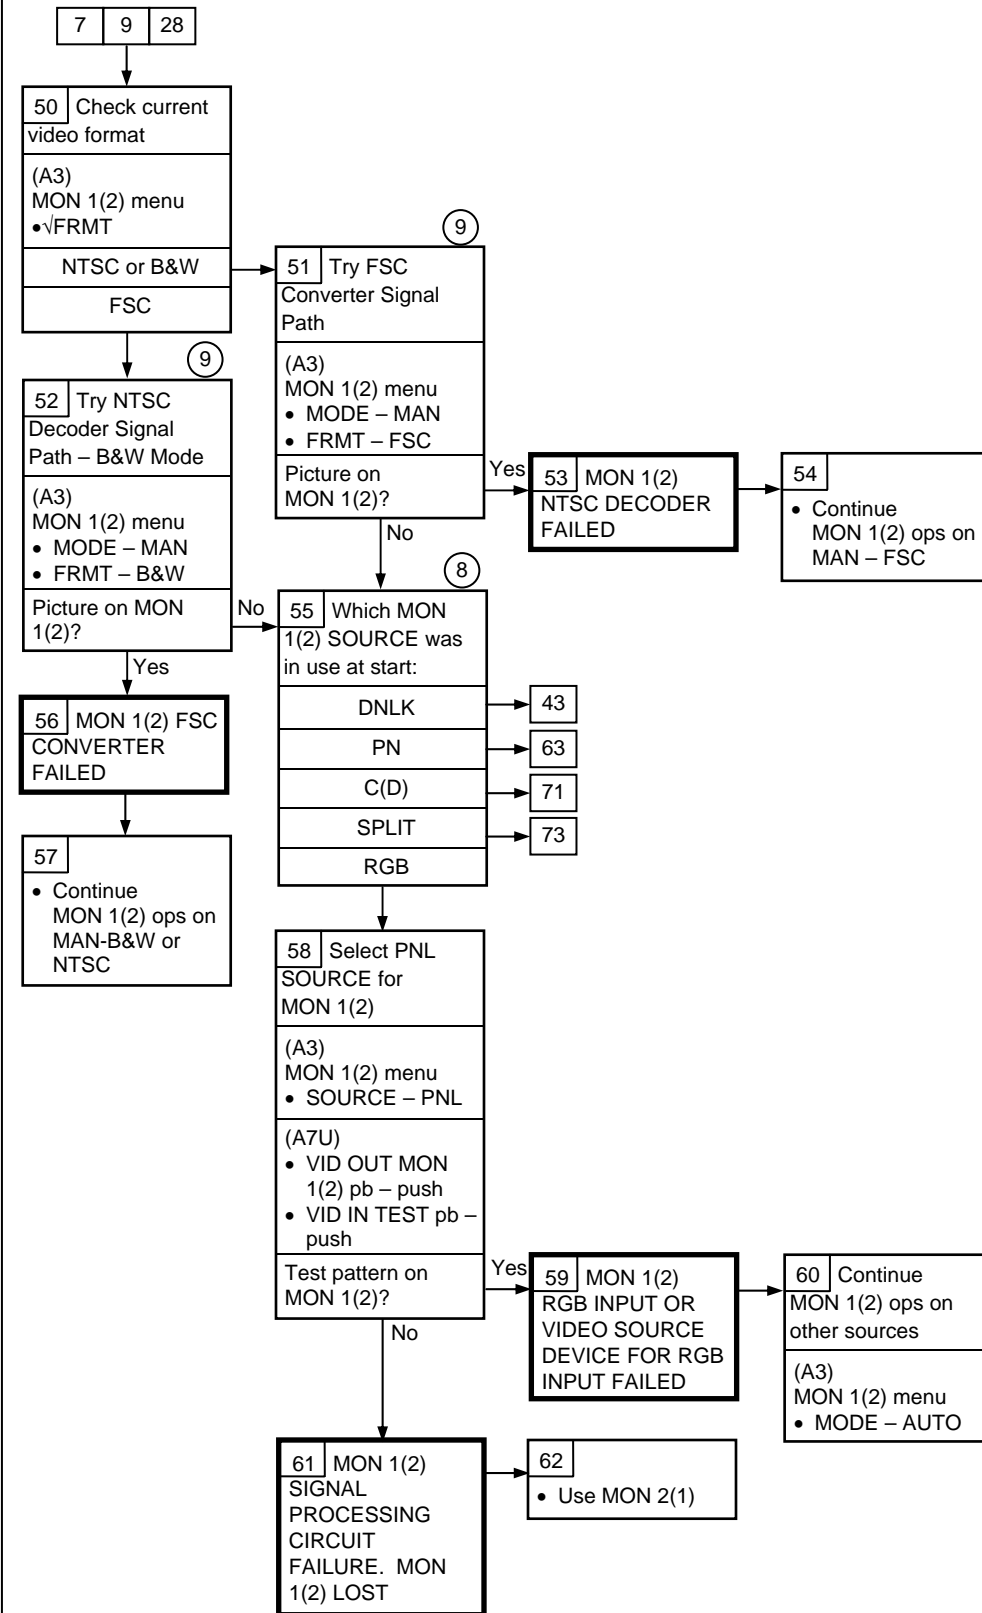

8 SOURCE is the source recorded in block 2

9 Picture will be B&W with possible flicker


CCTV 10.1 (Cont)

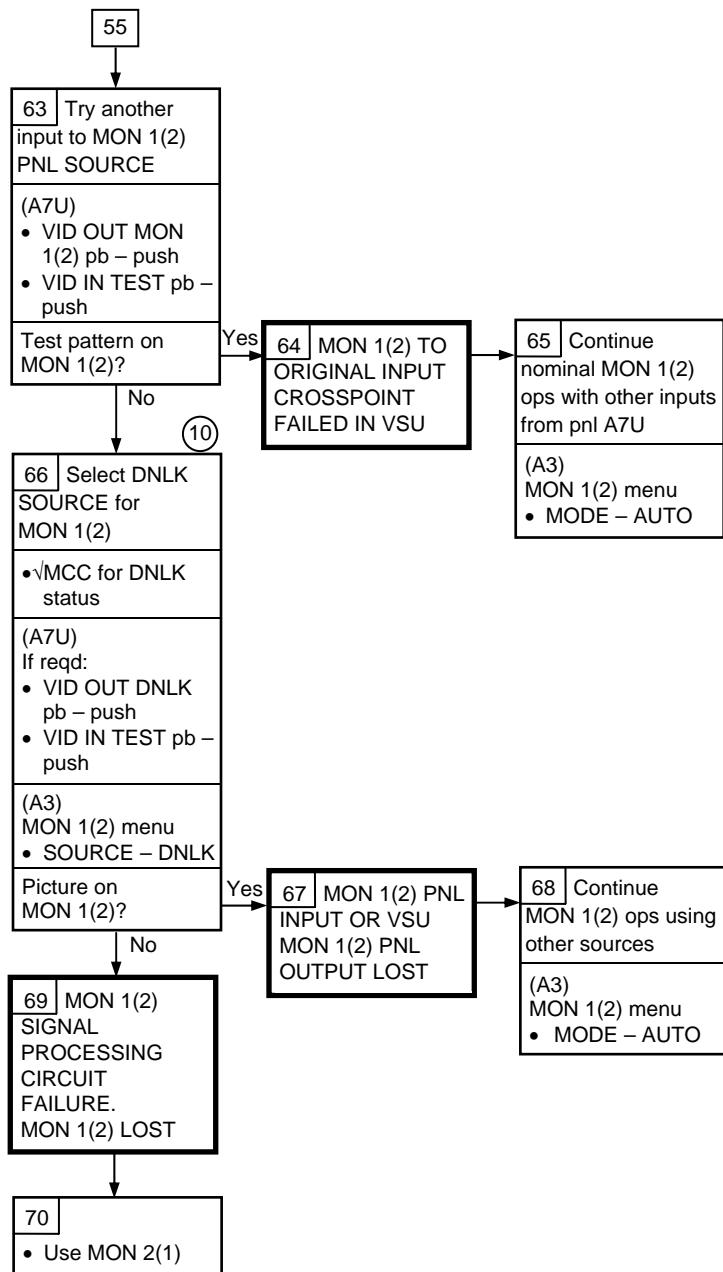

⑩
If DNLK in progress, selecting test pattern to DNLK not reqd. MCC will advise on DNLK status

CCTV

10.1 (Cont)

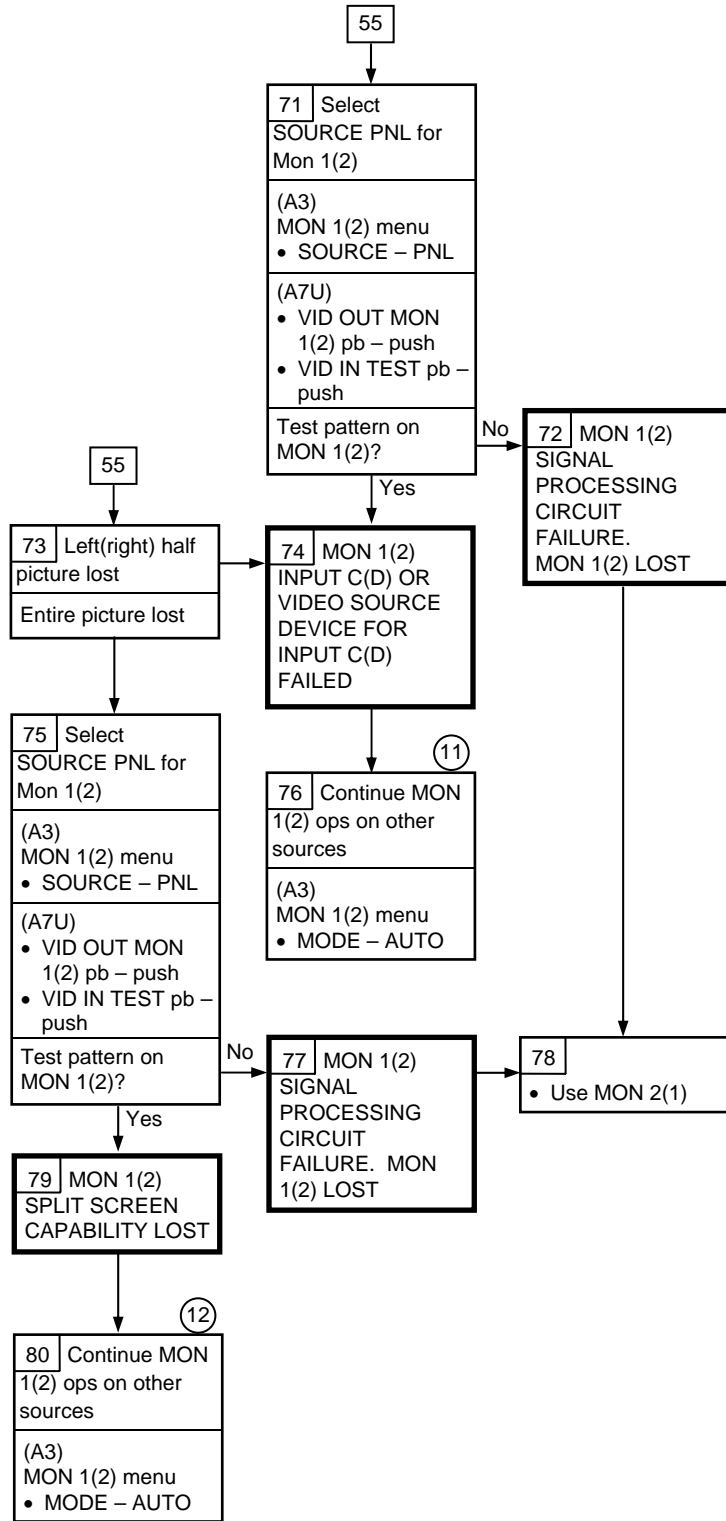

(11) Recovery of video source device may be possible

(12) Inputs C,D may be useable without SPLIT

CCTV

10.2 NO CAMR VIDEO

No Camr Video

Nominal Config:

(R14:D)
 cb MNA TV C AFT
 BAY CAMR/PAN-
 TILT – cl
 CAMR HTR – cl
 PAN-TILT HTR –
 cl

cb MNA TV CONTR
 UNIT – cl

cb MNA TV MON 1 –
 cl

cb MNB TV A FWD
 BAY CAMR/PAN-
 TILT – cl
 CAMR HTR – cl
 PAN-TILT HTR –
 cl

cb MNB TV CONTR
 UNIT – cl

cb MNB TV MON 2 –
 cl

cb MNC TV B KEEL/
 EVA CAMR/PAN-
 TILT – cl
 CAMR HTR – cl
 PAN-TILT HTR –
 cl


cb MNC TV CAB – cl

(R14:E)
 cb MNA D STBD
 RMS TV CAMR/
 PAN-TILT – cl
 CMR HTR – cl
 PAN-TILT HTR –
 cl

cb MNB RMS PORT
 RMS TV CAMR/
 PAN-TILT – cl
 CAMR HTR – cl
 PAN-TILT HTR –
 cl


(A7U)
 TV PWR CNTL –
 CMD
 TV PWR CONTR
 UNIT –
 MNA(MNB)
 TV SYNC – NORM
 TV DNK – ENA

(A3)
 MON 1(2)
 SOURCE – as reqd
 SYNC – INT
 PWR – ON
 MODE – AUTO
 GUNS – R,G,B –
 ON

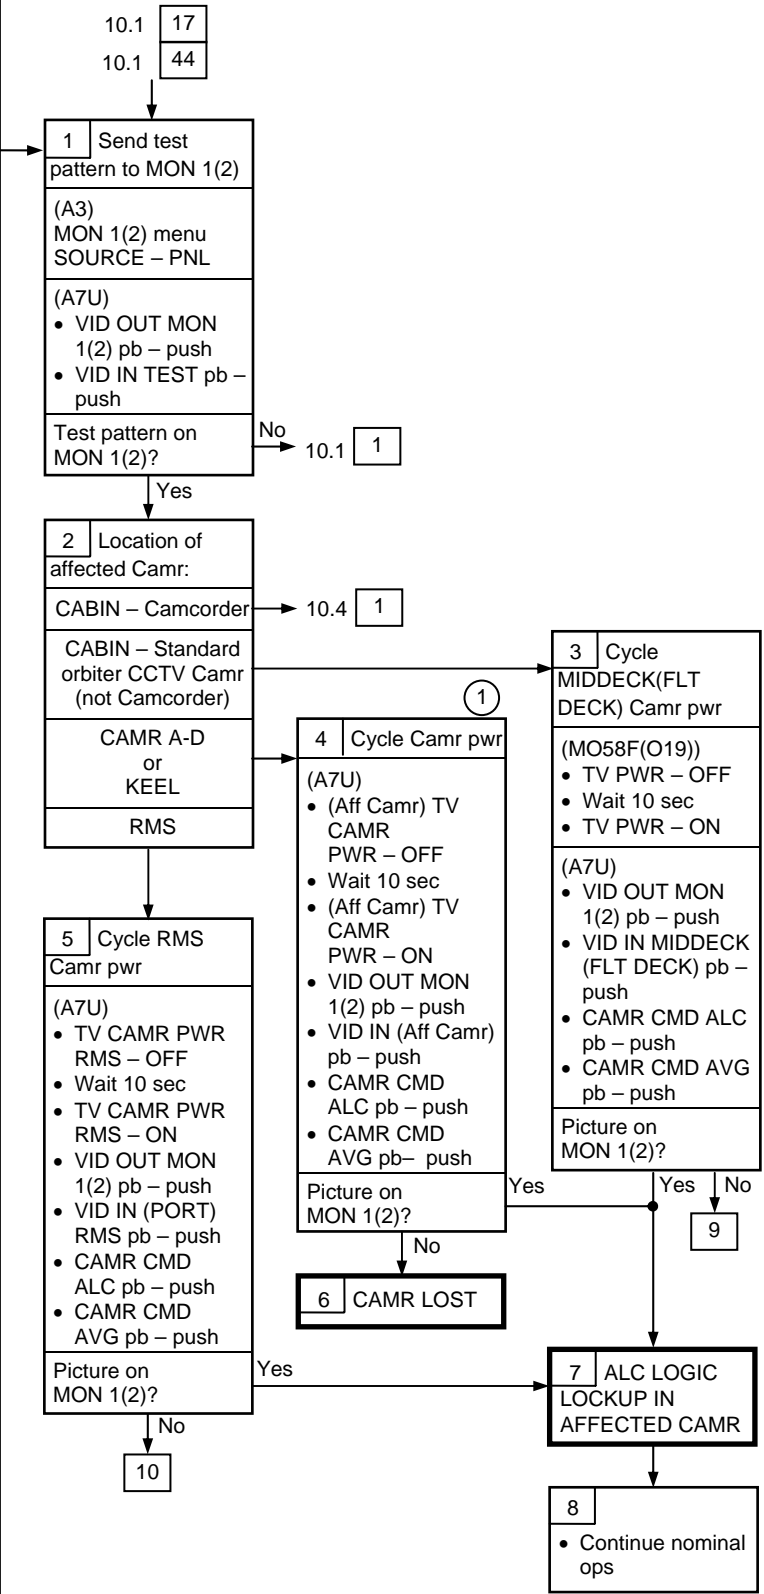

① KEEL Camr pwr control and KEEL Camr Video inputs are mission specific

CCTV 10.2 (Cont)

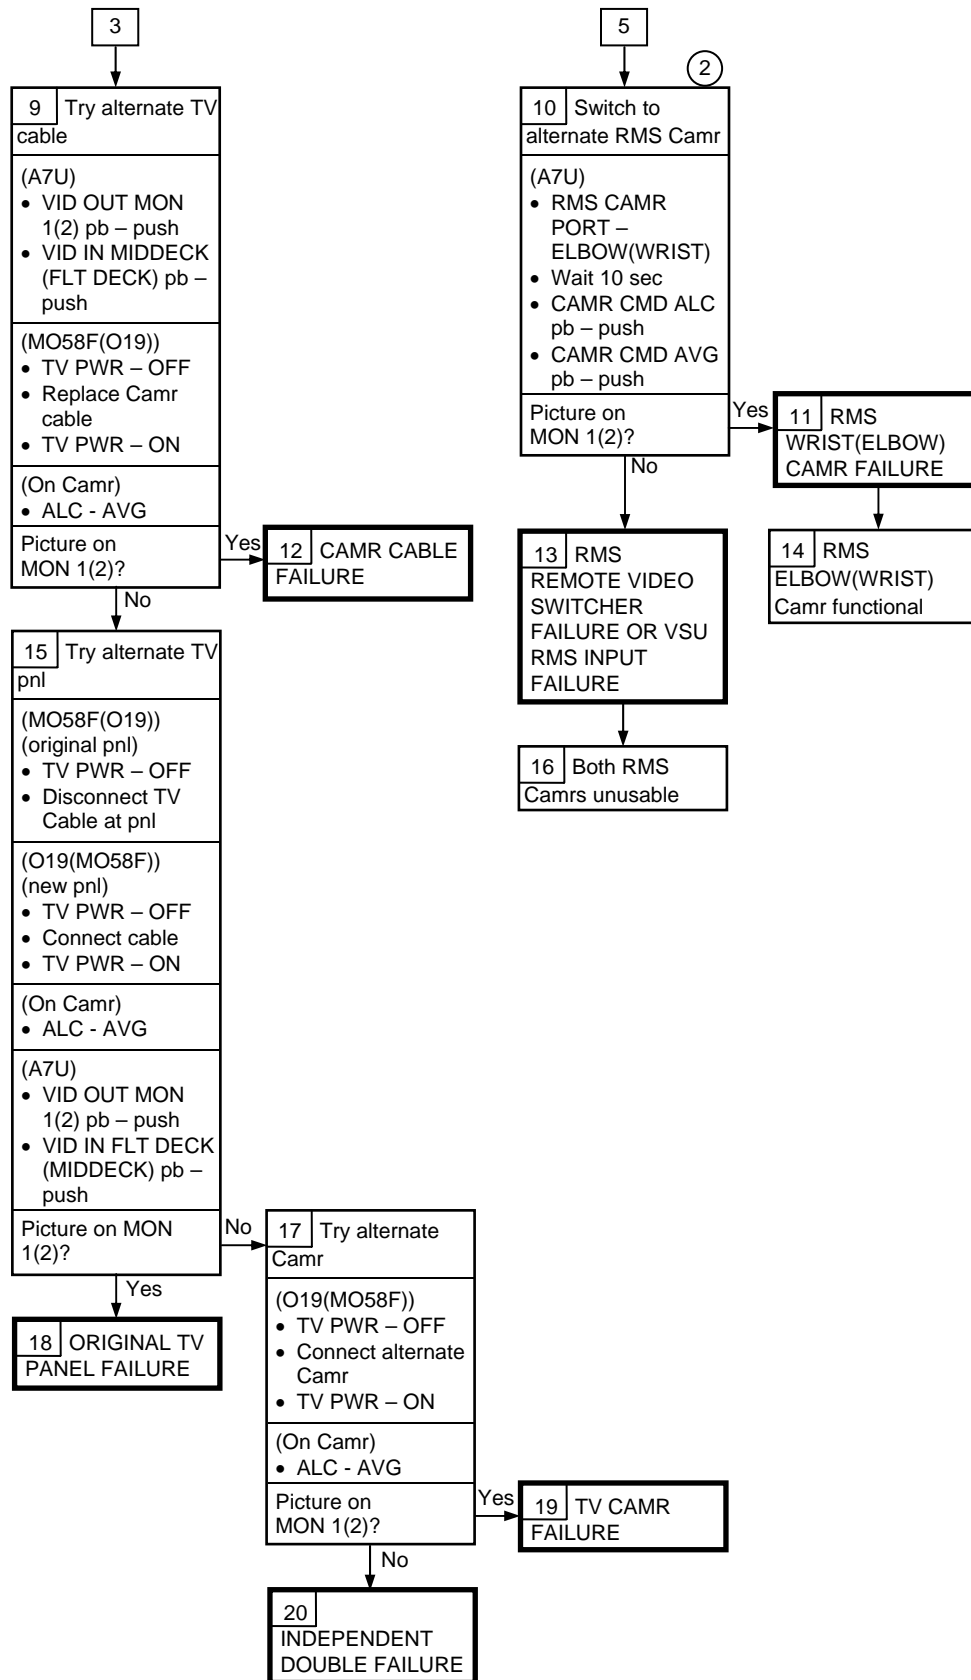

②
If currently selected to WRIST(ELBOW) then select ELBOW(WRIST)

CCTV

10.3 NO VTR PLAYBACK VIDEO

No VTR Playback Video


Nominal Config:

(R14:D)
 cb MNA TV CONTR UNIT – cl
 cb MNA TV MON 1 – cl
 cb MNB TV CONTR UNIT – cl
 cb MNB TV MON 2 – cl
 cb MNC TV CAB – cl

(A7U)
 TV PWR CNTL – CMD
 TV PWR CONTR UNIT – MNA(MNB)
 TV SYNC – NORM
 TV DNLK – ENA

(A3)
 MON 1(2)
 SOURCE – as reqd
 SYNC – INT
 PWR – ON
 MODE – AUTO
 GUNS – R,G,B – ON

(V10)
 PWR – ON

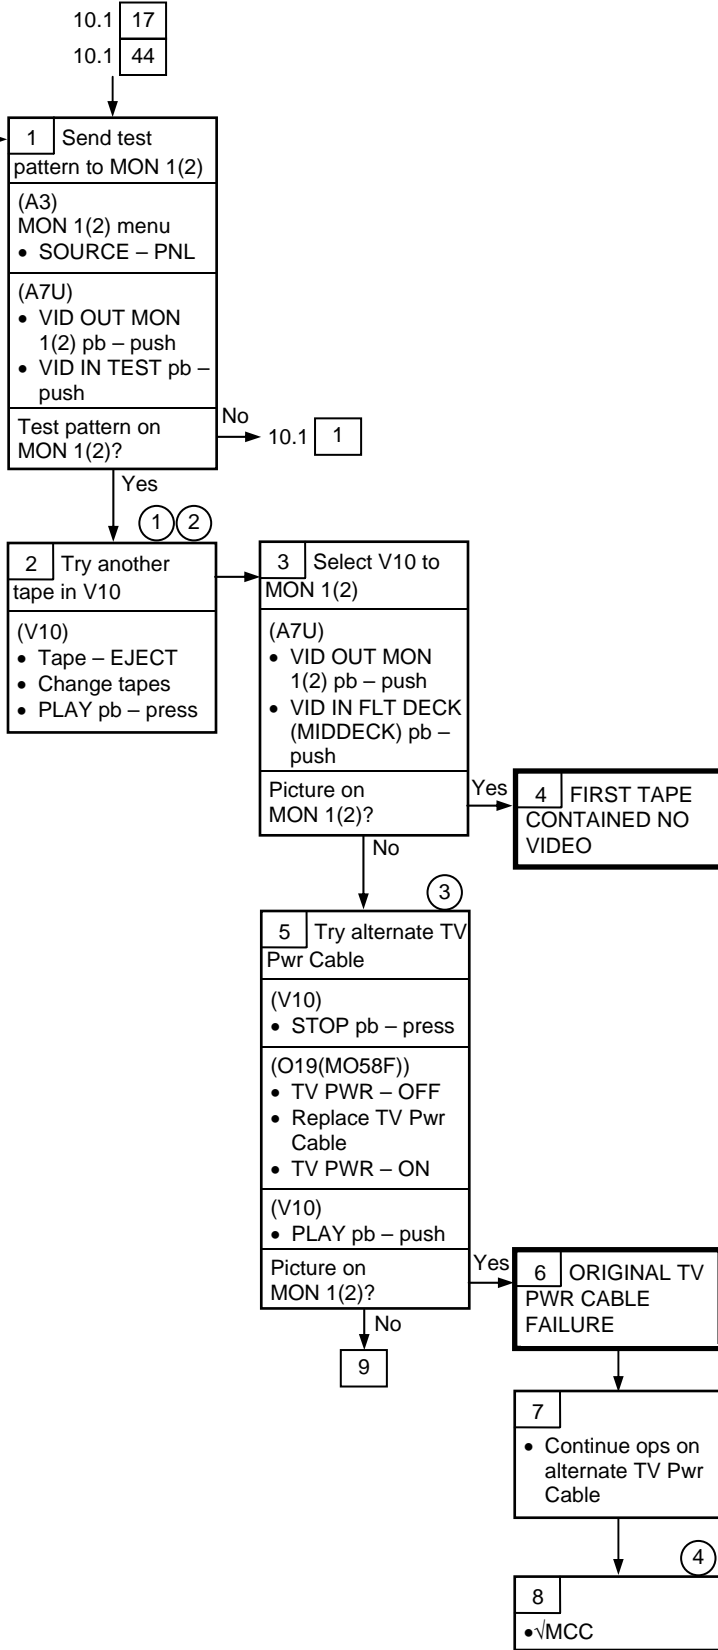


① Replacement tape should have good video recorded on it

② V10 requires dump thru pnl O19(MO58F)

③ √MCC if alternate equip avail

④ IFM for AVIU(cables) may be possible

CCTV 10.3 (Cont)

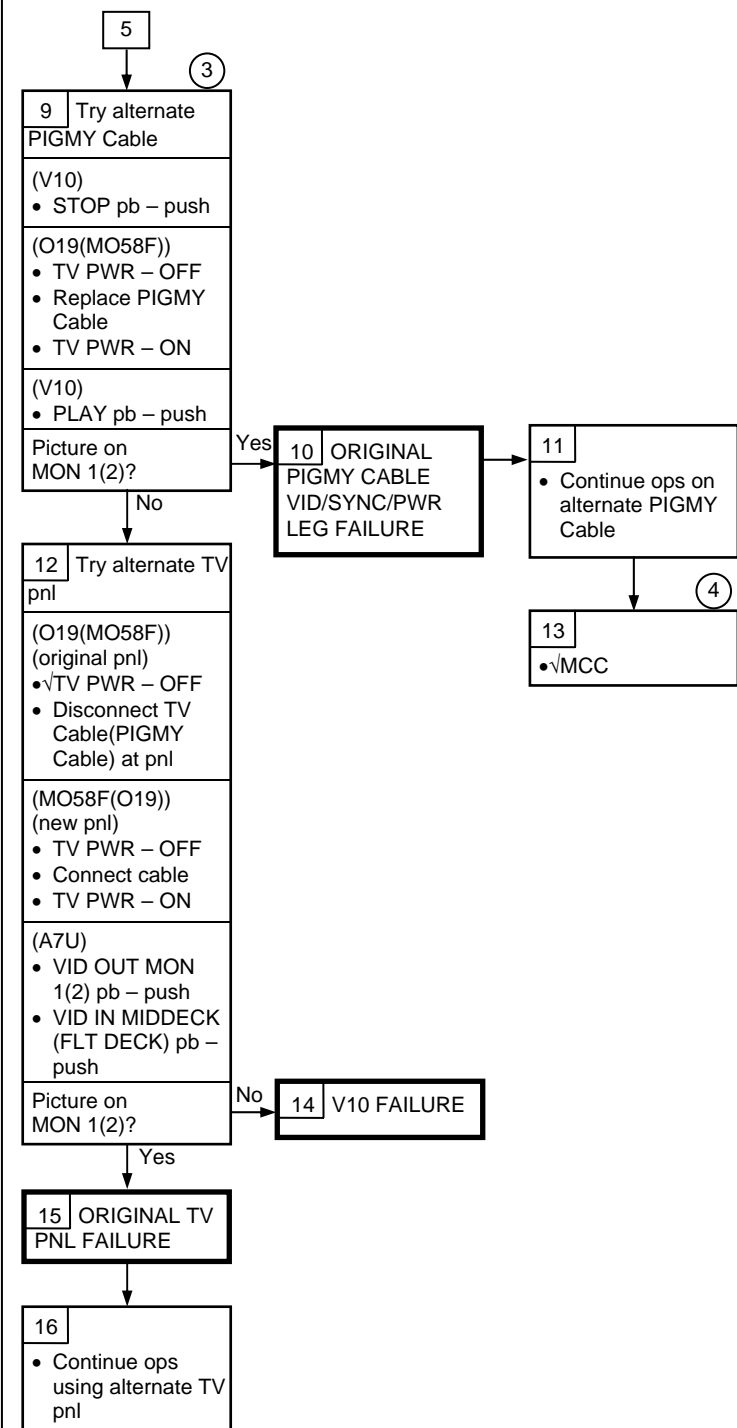

③
√MCC if alternate equip avail

④
IFM for AVIU(cables) may be possible

CCTV

10.4 NO CAMCORDER VIDEO ON COLOR TV MONITOR

10.1 17
 10.1 44
 10.2 2

No Camcorder Video


Nominal Config:

(R14:D)
 cb MNA TV CONTR UNIT - cl
 cb MNA TV MON 1 - cl
 cb MNB TV CONTR UNIT - cl
 cb MNB TV MON 2 - cl
 cb MNC TV CAB - cl


(A7U)
 TV PWR CNTL - CMD
 TV PWR CONTR UNIT - MNA(MNB)
 TV SYNC - NORM
 TV DNK - ENA

(A3)
 MON 1(2)
 SOURCE - as reqd
 SYNC - INT
 PWR - ON
 MODE - AUTO
 GUNS - R,G,B - ON

(PD100)
 MODE - CAMERA

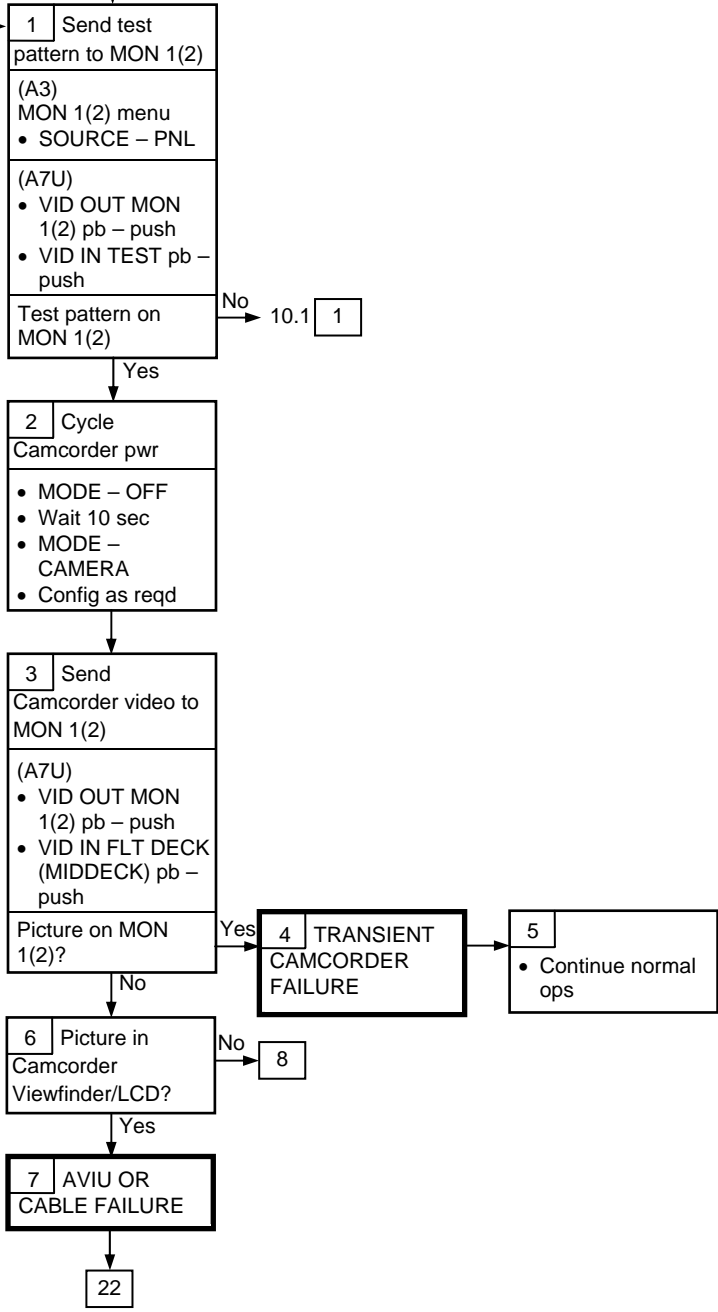


CCTV 10.4 (Cont)

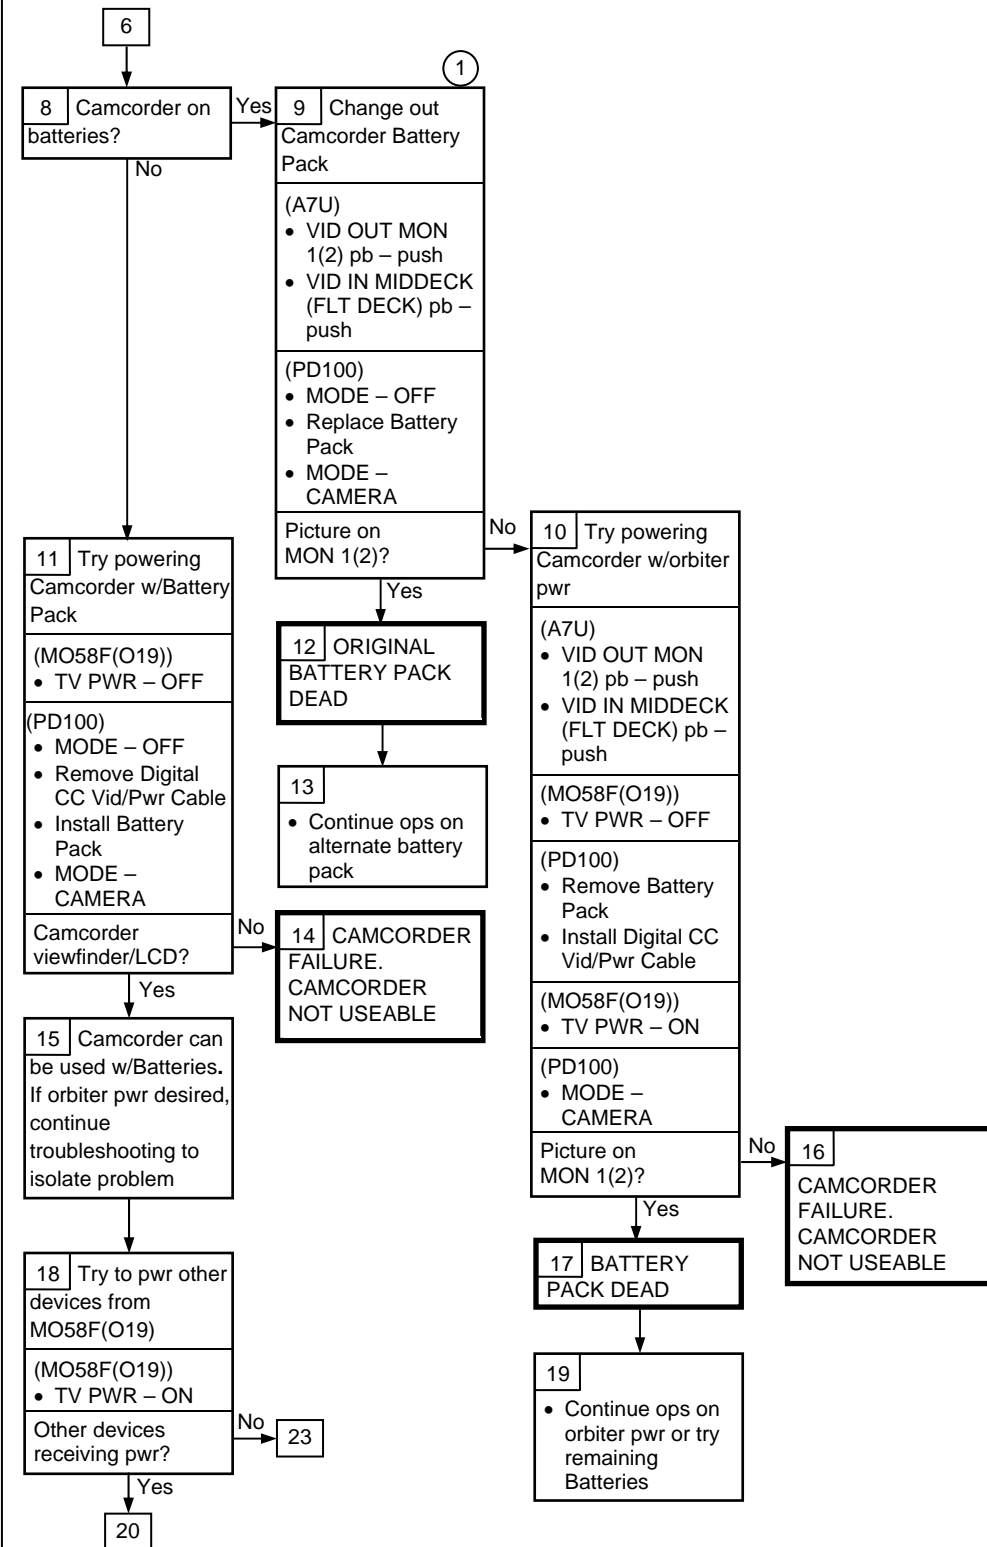

①
Video link from Camcorder to orbiter TV pnl should already be connected via Digital CC Vid/Pwr cable, AVIU, and TV Pwr cable when viewing Camcorder video on orbiter color TV monitor


CCTV 10.4 (Cont)

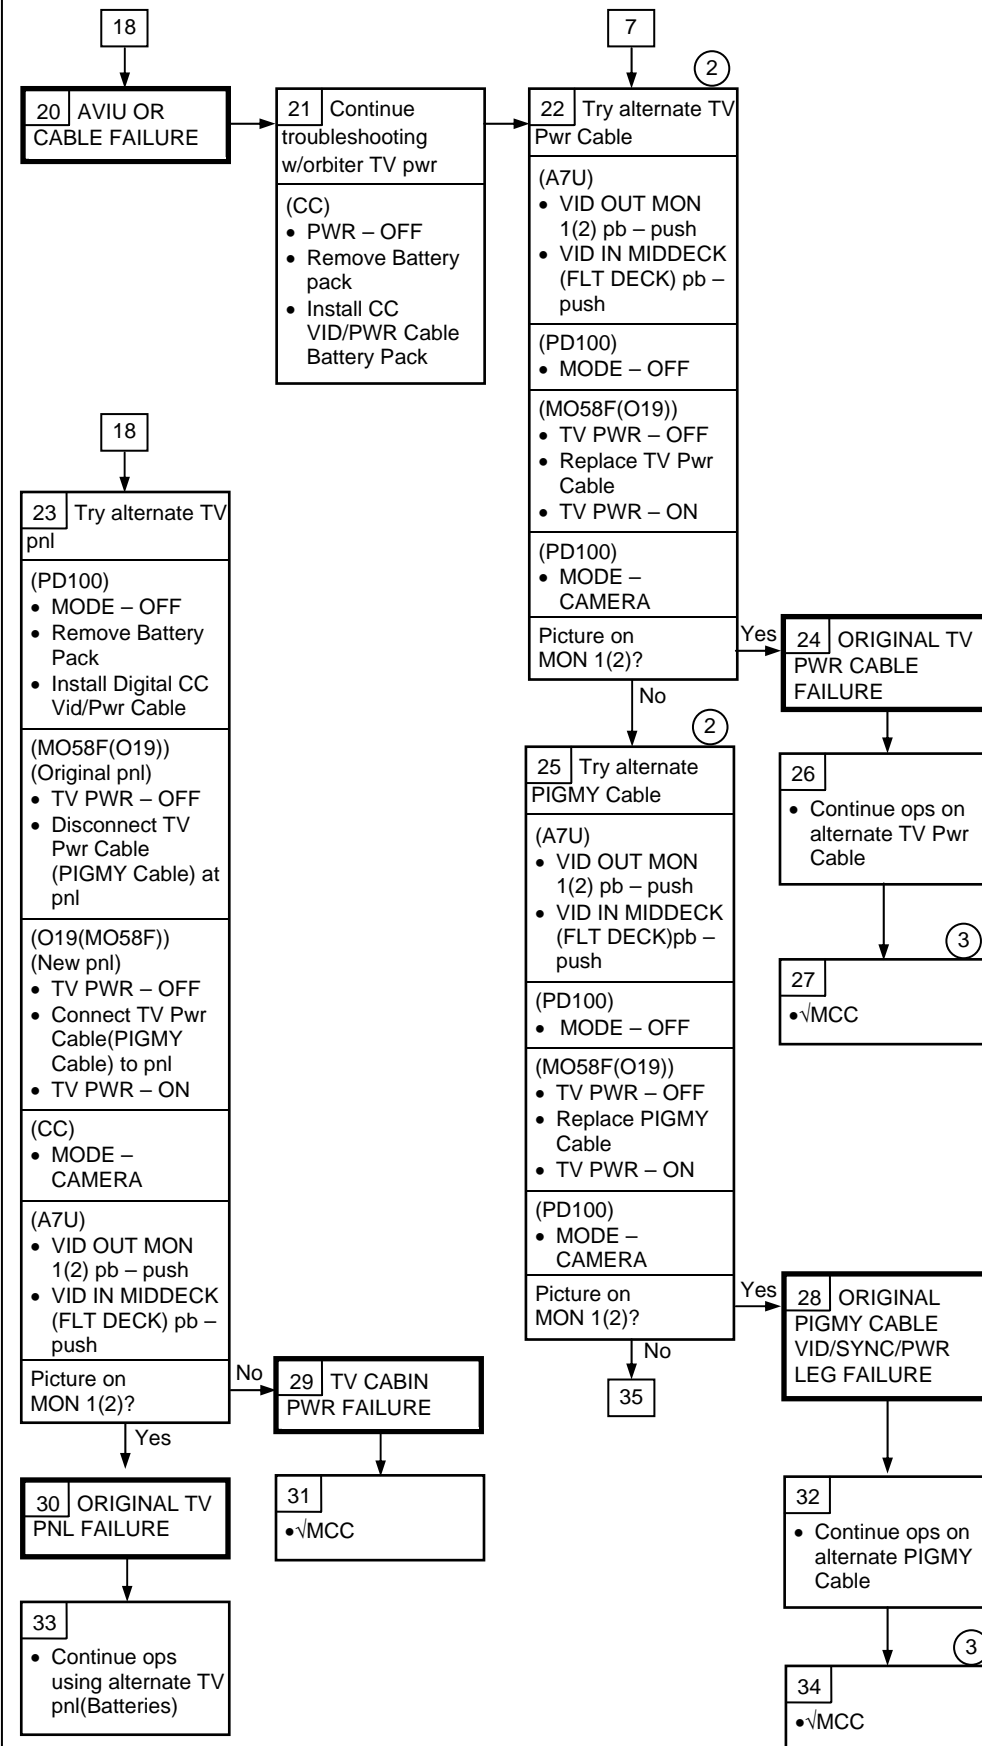

②
√MCC if alternate equip not avail

③
IFM for AVIU or cables may be possible

CCTV 10.4 (Cont)

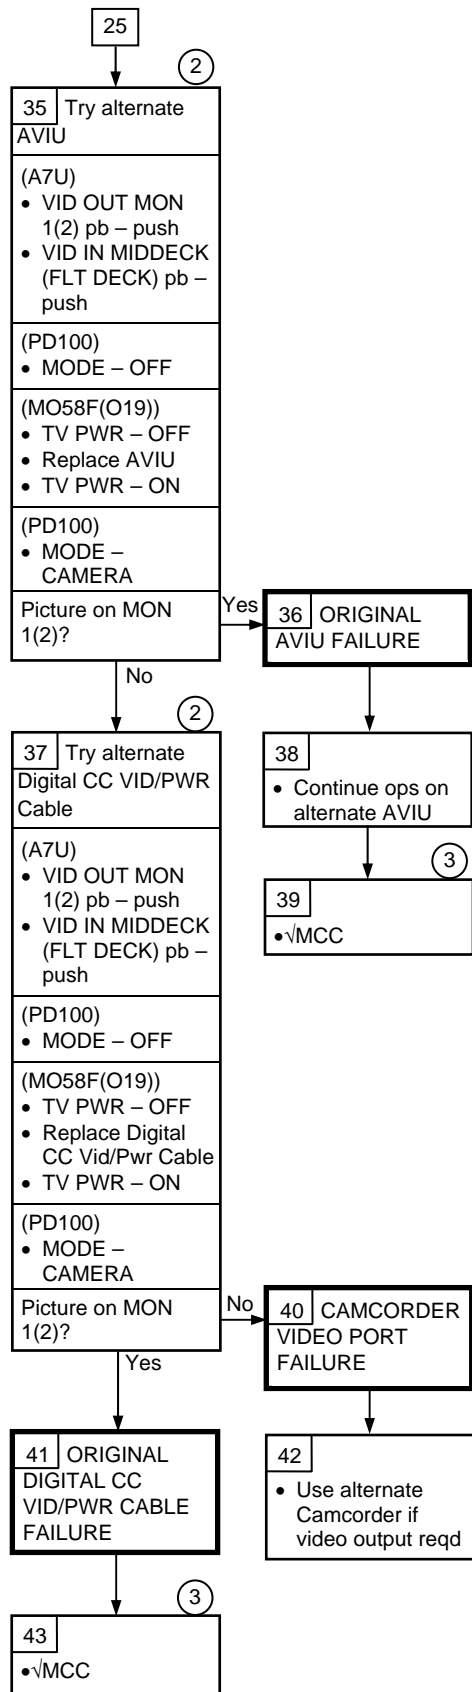

②
√MCC if alternate
equip not avail

③
IFM for AVIU or
cables may be
possible

CCTV

10.5 RMS TV cb OPENS

Port RMS TV Camr/Pan-Tilt cb Opens


Nominal Config:

(R14:D)
 cb MNA TV CONTR UNIT – cl
 cb MNA TV MON 1 – cl
 cb MNB TV CONTR UNIT – cl
 cb MNB TV MON 2 – cl
 cb MNC TV CAB – cl

(R14:E)
 cb MNB RMS PORT RMS TV CAMR/PAN-TILT – cl
 CAMR HTR – cl
 PAN-TILT HTR – cl


(A7U)
 TV PWR CNTL – CMD
 TV PWR CONTR UNIT – MNA(MNB)
 TV SYNC – NORM
 TV DNLK – ENA

(A3)
 MON 1(2) SOURCE – as reqd
 SYNC – INT
 PWR – ON

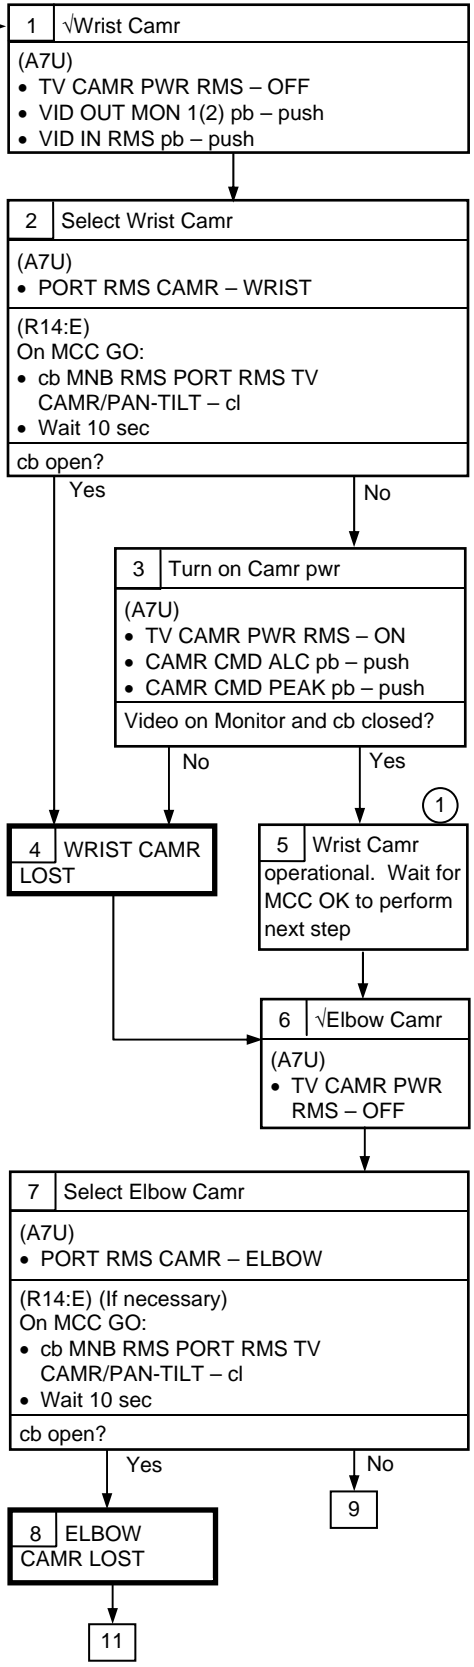

① Pwr routed to both Camrs at all times and switched inside Camrs. Short occurring in one Camr may cause loss of pwr to both Camrs on RMS. Decision to proceed based on current spikes, if any, and importance of RMS Camrs to remainder of mission

CCTV 10.5 (Cont)

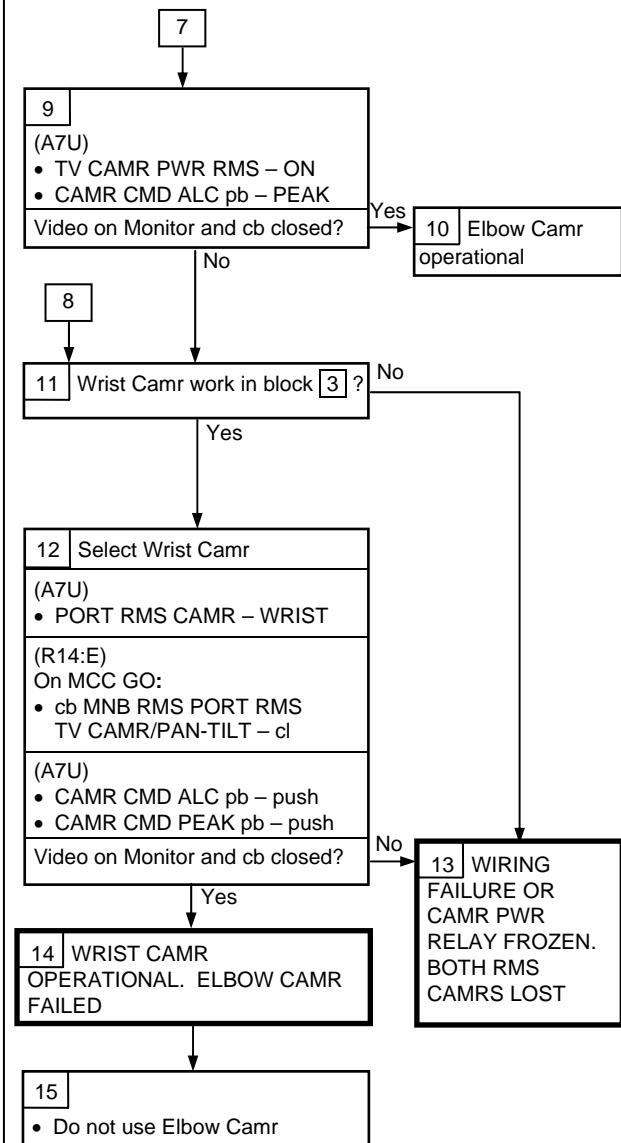

This Page Intentionally Blank

CENTERLINE (C/L) CAMR

	<u>PAGE</u>
C/L CAMR INSTALL.....	11-2
C/L CAMR VIDEO TROUBLESHOOT.....	11-5
C/L CAMR MISALIGNMENT	11-8
C/L CAMR OPS FOR VSU FAIL	11-10

C/L CAMR

CENTERLINE (C/L) CAMR

C/L CAMR INSTALL

L12 (SSP 2) 1. ODS C/L Camr Config
 ✓C/L CAM PWR – OFF

R12 (VPU) ✓SEC C/L Cap installed
 ✓Green Jumper – SEC C/L
 ✓VPU PWR – ON (LED on)

Unstow PRI C/L Camr, PRI C/L TV Camr Harness Assy per stowage plan

NOTE

When connecting ODS C/L TV Camr Harness Assy, ✓pins to socket connection

ODS ✓ODS C/L Camr Brkt mounted securely
 Mount PRI C/L Camr to ODS C/L Camr Brkt
 ✓Flex Duct attached to Camr brkt
 Config cable per dwg at right


C/L Camr ✓SSF/STS sw – STS

L12 (SSP 1) ✓cb SW PWR 1 (CB2) – cl
 (SSP 2) C/L CAM PWR – SEC ON

A6L LT VEST PORT, STBD – ON as reqd

Perform ACTIVATION (Cue Card, TV) as reqd

A7 VID OUT MON 1(2) pb – push
 IN PL2(VPU) pb – push
 ALC pb – push
 AVG pb – push

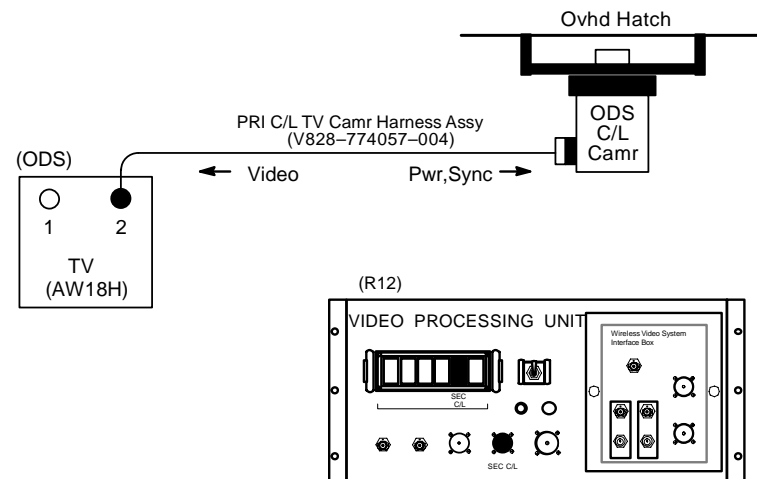


jsc48037_048r2.cvx

CENTERLINE (C/L) CAMR (Continued)

C/L CAMR INSTALL (Continued)

2. Camr Position Verification

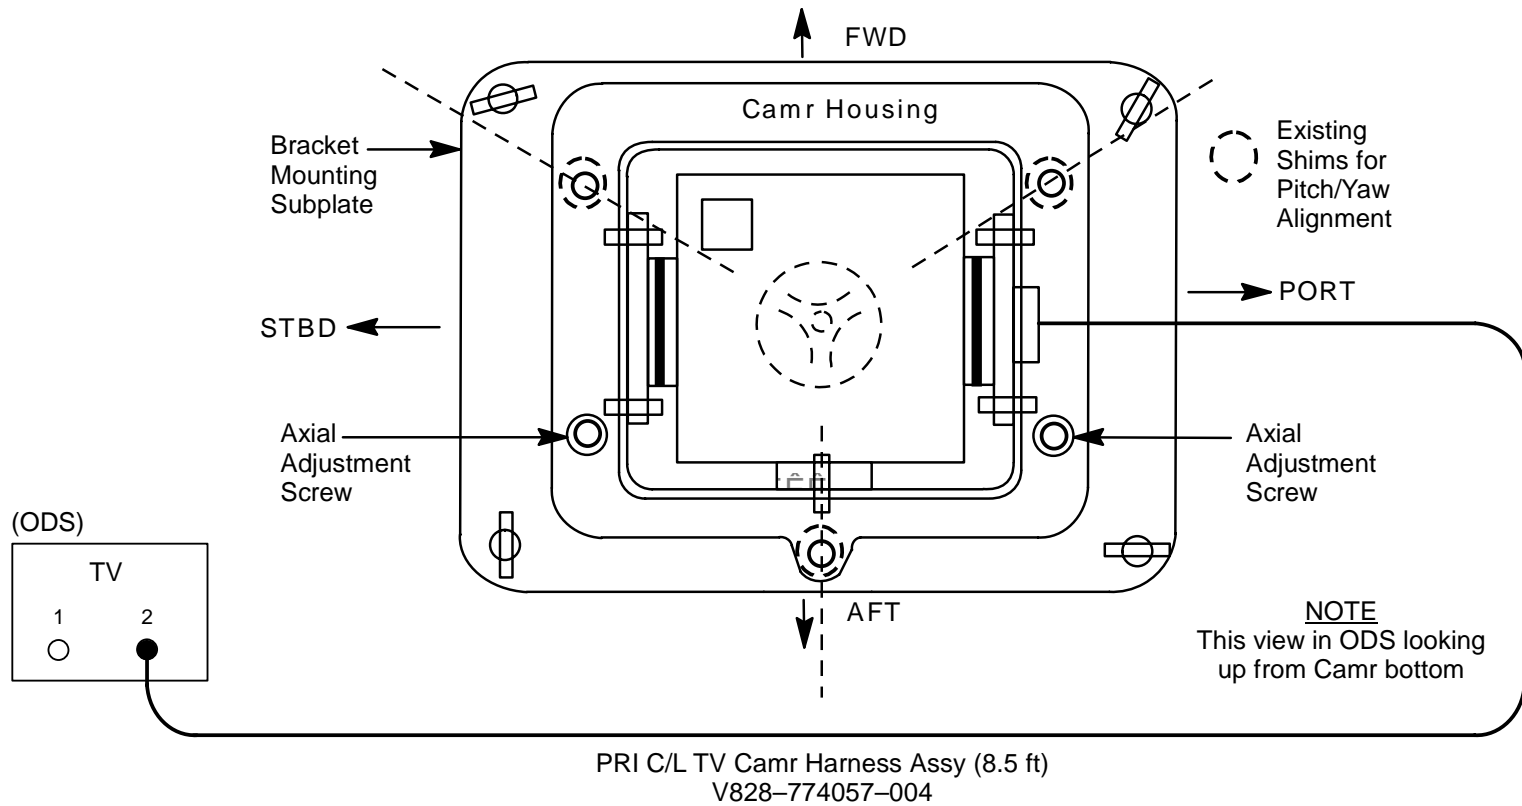

jsc48037_049r2.cvx

CENTERLINE (C/L) CAMR (Continued)

C/L CAMR INSTALL (Concluded)

MON 1(2) 3. ODS C/L Camr Alignment Check
LDATA – ON
CDATA – GRN
XHAIR – GRN

A7 Zoom to $10^\circ \pm 0.5^\circ$
Focus to see Xhair target

NOTE

Green xhairs on monitor may move off center in calibration target when zooming in,out. Xhair will be closest to center at full zoom in position


MON 1(2) ✓ Vertical xhairs coincide w/vertical alignment wire and are parallel. If xhair marks overlay each other, no yaw(axial) alignment needed (see dwg above)

✓ Intersection of monitor vertical,horizontal xhair falls within target circular opening from $\sim 10\text{-}40^\circ$ zoom range of Camr

Report results of both alignment verifications (at 10° and 40°) to MCC

A7 4. Deactivation
L12 (SSP 2) CAMR CMD IRIS – CL
C/L CAM PWR – OFF
Go to DEACTIVATION (Cue Card, TV) as reqd

A6L LT VEST PORT,STBD – OFF as reqd

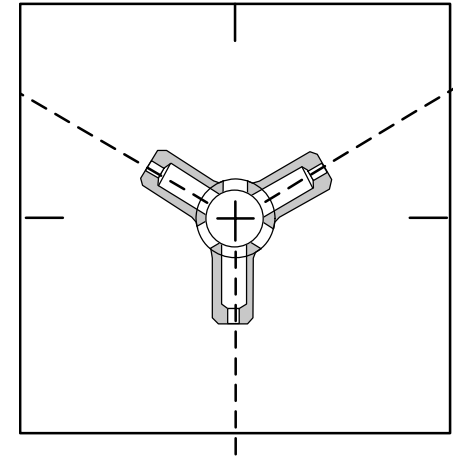

jsc48037_050.cnv

CENTERLINE (C/L) CAMR (Continued)

C/L CAMR VIDEO TROUBLESHOOT

1. ✓C/L Camr nominal config:
 - ODS Camr SSF/STS sw – STS
 - PRI C/L Camr connected via PRI C/L TV Camr Harness Assy to TV2 port
 - R12 (VPU) ✓VPU SEC C/L Cap installed on SEC C/L
 - ✓Green Jumper – SEC C/L
 - ✓VPU PWR – ON (lt ON)
 - L12 (SSP 1) ✓cb SW PWR 1 (CB2) – cl
 - (SSP 2) C/L CAM PWR – SEC ON
 - A7 VID OUT MON 1(2) pb – push
 - IN PL2(VPU) pb – push
 - A6L LT VEST PORT,STBD – ON as reqd
 - A3 (MON) ✓C/L Camr Video

If no C/L Camr video on monitor:

2. Pwr-Cycle C/L Camr:
 - A7 CAMR CMD IRIS – CL (hold 8 sec)
 - L12 (SSP 2) C/L CAM PWR – OFF, wait 10 sec, SEC ON
 - A7 ALC pb – push
 - AVG pb – push
 - A3 (MON) ✓C/L Camr Video

CENTERLINE (C/L) CAMR (Continued)

C/L CAMR VIDEO TROUBLESHOOT (Continued)

If still no C/L Camr video on monitor:

3. Change ODS TV port:
 - A7 CAMR CMD IRIS – CL (hold 8 sec)
 - L12 (SSP 2) C/L CAM PWR – OFF

 - ODS Disconnect PRI C/L TV Camr Harness Assy from TV2 port
Connect PRI C/L TV Camr Harness Assy to TV1 port
 - R12 (VPU) √VPU PRI C/L Cap installed on PRI C/L
Green Jumper – PRI C/L
 - L12 (SSP 2) C/L CAM PWR – PRI ON

 - A7 ALC pb – push
AVG pb – push
 - A3 (MON) √C/L Camr Video

If still no C/L Camr video on monitor:

4. Change C/L TV Camr Harness Assy:
 - A7 CAMR CMD IRIS – CL (hold 8 sec)
 - L12 (SSP 2) C/L CAM PWR – OFF

 - L12 (SSP 2) Unstow SEC C/L TV Camr Harness Assy per stowage plan
Disconnect PRI C/L TV Camr Harness Assy from ODS TV1 port and PRI C/L Camr
Connect SEC C/L TV Camr Harness Assy to ODS TV1 and PRI C/L Camr
C/L CAM PWR – PRI ON

 - A7 ALC pb – push
AVG pb – push
 - A3 (MON) √C/L Camr Video

CENTERLINE (C/L) CAMR (Continued)

C/L CAMR VIDEO TROUBLESHOOT (Concluded)

If still no C/L Camr video on monitor:

5. Install SEC C/L Camr:
- | | |
|-------------|---|
| A7 | CAMR CMD IRIS – CL (hold 8 sec) |
| L12 (SSP 2) | C/L CAM PWR – OFF |
| | Unstow SEC C/L TV Camr per stowage plan |
| | Disconnect SEC C/L TV Camr Harness Assy from PRI C/L Camr |
| | Remove PRI C/L Camr from ODS C/L Camr Brkt |
| | Mount SEC C/L Camr to ODS C/L Camr Brkt |
| L12 (SSP 2) | Connect SEC C/L TV Camr Harness Assy to SEC C/L Camr |
| | C/L CAM PWR – PRI ON |
| A7 | ALC pb – push |
| | AVG pb – push |
| A3 (MON) | √C/L Camr Video |

If video, perform C/L CAMR INSTALL, step 3

If still no C/L Camr video on monitor:

6. √MCC

CENTERLINE (C/L) CAMR (Continued)

C/L CAMR MISALIGNMENT

If green xhair outside inner diameter of circular portion of calibration target during PRI C/L Camr alignment, perform following:

1. Describe to MCC location of xhair in relation to target circle. Reference dwgs, 11-9
2. Remove, re-install Camr to bridge. Recheck alignment per C/L CAMR INSTALL, step 3

Perform each of the remaining steps if misalignment persists:

3. Remove, re-install mounting bridge to ODS. Recheck alignment per C/L CAMR INSTALL, step 3
4. Shim Camr/bridge interface:
 - a. Obtain feeler gauges from ML60B Primary C/L Foam
 - b. Loosen fasteners on Camr/bridge interface
 - c. Insert feeler gauge between Camr brkt and bridge as appropriate to center xhair and tighten fasteners
 - d. Recheck alignment per C/L CAMR INSTALL, step 3
 - e. Repeat as reqd w/different sized feeler gauges or shim locations until xhair within target circle
5. Install SEC C/L Camr using PRI C/L Camr Harness Assy and ODS TV Port 2 (no change to VPU selections) per stowage plan:


A7	CAMR CMD IRIS – CL (hold 8 sec)
L12 (SSP 2)	C/L CAM PWR – OFF
ODS	Disconnect Camr Harness Assy from PRI C/L Camr
	Replace PRI C/L Camr w/SEC C/L Camr
	Connect Camr Harness Assy to SEC C/L Camr
L12 (SSP 2)	C/L CAMR PWR – SEC ON
A7	ALC pb – push
	AVG pb – push

Check alignment per C/L CAMR INSTALL, step 3. Describe misalignment to MCC per step 1


6. Repeat step 4 for SEC C/L Camr
7. If shimming both PRI and SEC C/L Camrs fails to bring xhair within target circle, re-install Camr w/best alignment. Report which Camr installed
8. √MCC to determine if ODS CENTERLINE CAMR ANGULAR ALIGNMENT (IFM, PROCEDURES M THRU R) reqd

CENTERLINE (C/L) CAMR (Continued)

C/L CAMR MISALIGNMENT (Concluded)

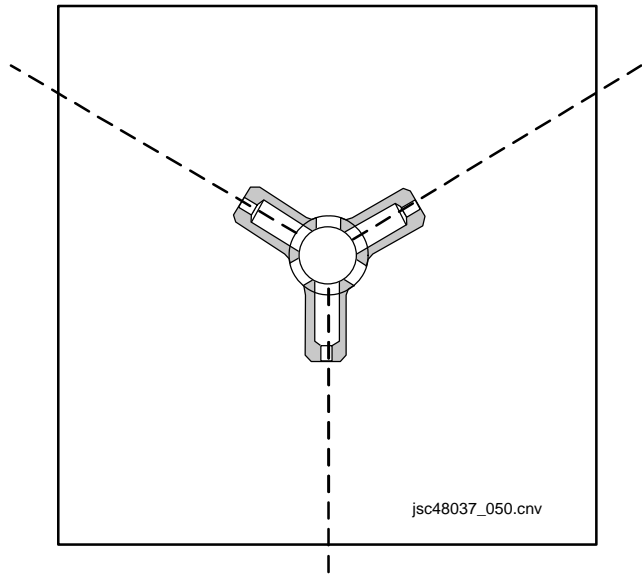

PRI C/L CAMR

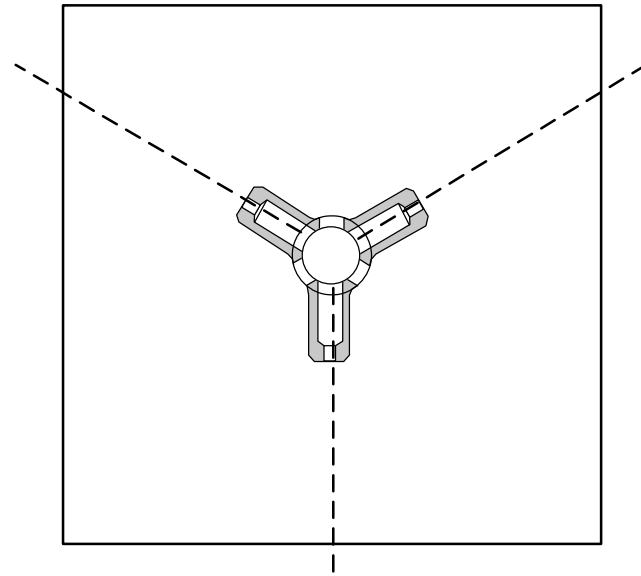

SEC C/L CAMR

jsc48037_051.cnv


CENTERLINE (C/L) CAMR (Continued)

C/L CAMR OPS FOR VSU FAIL

	1. <u>Setup</u>				2. <u>Activation</u>
	Obtain:		TVCU		CENTERLINE/CAMCORDER sw – CENTERLINE
	TVCU/CIP I/F Cable		O19		TV Pwr – ON
	TVCU		L12		C/L CAM PWR – SEC ON
	Camr Cont/CTVM Cable		(SSP 2)		
	TV Pwr Cable (20 ft) (2)				PGSC PWR SOURCE – ON
	AVIU LCD Cable				PGSC – ON
	LCD		A31p		
	RS-232 Cable				cb MNB TV MON 2 – cl
	PGSC		R14:D		MON 2 PWR – ON
	PGSC Pwr Cable(s)		A3		
	PIGMY				PWR – ON (LED on)
	AVIU		V10		√Tape – Installed
	V10				
	MON to VIU/CM Cable				PWR – ON
	Digital CC VID/PWR Cable		LCD		
	AVIU-CC VID Cable				
			A31p		Insert TVCU Boot CD
A3	√MON 2 PWR – OFF				Shutdown Windows
R14:D	cb MNB TV MON 2 – op				Pwr on A31p while holding down F12 key until
A3	Disconnect Pwr MNB from MON 2 J1				'Boot Menu' appears
					Sel '3. CD-ROM Drive' using down arrow
	Config per dwg, 11-11				(selected when text white)
					<Enter>
					CTVC CONTROLLER menu
					CAMERA (click)
					P2 (click)
					ALC – AVG (click)
					Return to P/TV scene as reqd
					CTVC CONTROLLER menu
					√Zoom,Iris,Focus as reqd

CENTERLINE (C/L) CAMR (Continued)

C/L CAMR OPS FOR VSU FAIL (Continued)

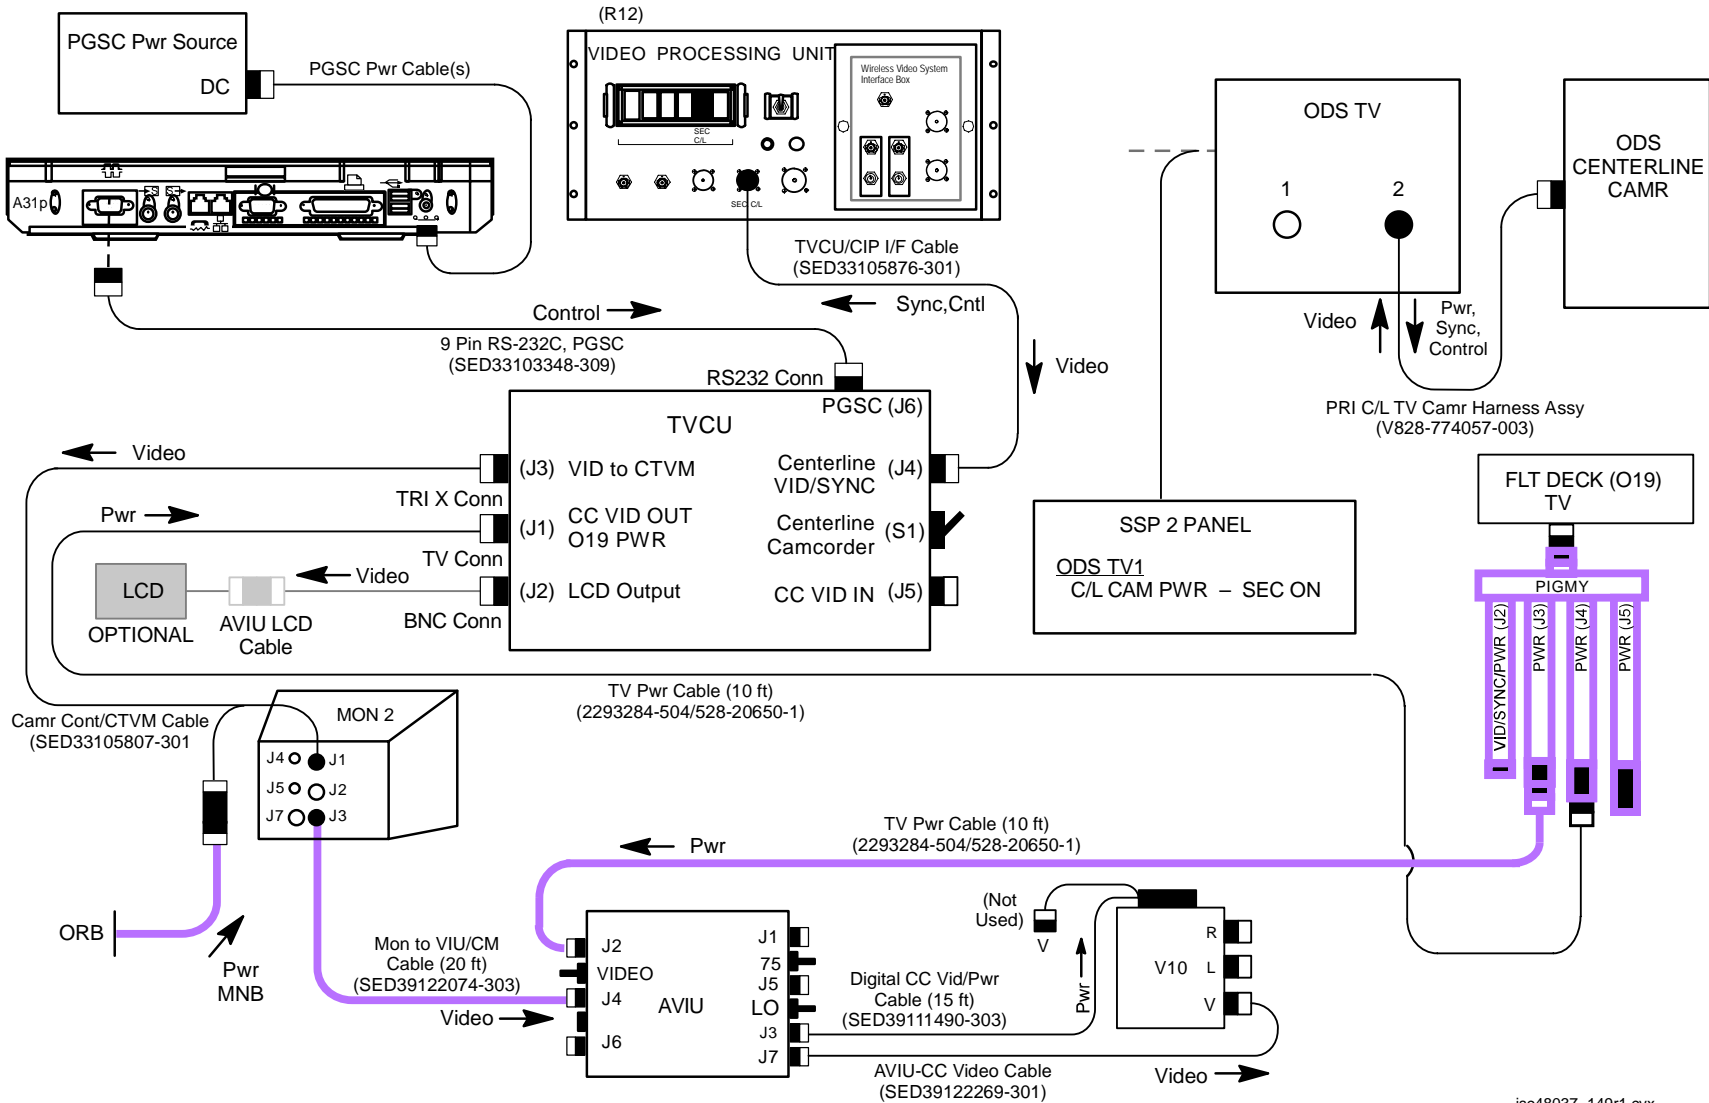

jsc48037_149r1.cvx

CENTERLINE (C/L) CAMR (Concluded)

C/L CAMR OPS FOR VSU FAIL (Concluded)

A31p 3. Deactivation
CTVC CONTROLLER menu
 IRIS – CLOSE
 QUIT

 PGSC – OFF
 PGSC Pwr Source – OFF

L12 (SSP 2) C/L CAM PWR – OFF

O19 TV PWR – OFF

LCD PWR – OFF

MON 2 Pwr – OFF
 Stow hardware as reqd

I

DTV

	<u>PAGE</u>
SPECIFICATIONS.....	12-2
NOMENCLATURE.....	12-3
VTR (SONY DSR-25) NOMINAL MENU SETTINGS	12-13
DTV FUNCTIONAL SCHEMATIC	12-14
VTR CLOCK SET	12-15
MALS	12-16
12.1 NO VIDEO AT VTR OUT	12-16
12.2 NO DIGITAL DNLK VIDEO AT MCC	12-16
12.3 MUX PWR LED(s) OFF	12-17
12.4 MUX CHANNEL 3 DATA LED OFF	12-17
12.5 VIP PWR LED OFF	12-18
12.6 VIP DATA FLOW LED OFF	12-18
12.7 VTR ON/STANDBY RED LED OFF	12-19
12.8 VTR STARTS RECORDING OR REWINDS AND STARTS PLAYING AFTER MUX PWR APPLIED	12-19
12.9 VTR TAPE CONTROLS NOT FUNCTIONING (VTR DISPLAY INDICATES "ERR")	12-19
12.10 VTR DISPLAYS ERROR MSG 32	12-19
12.11 VTR DISPLAYS ERROR MSG 21	12-20
12.12 VTR AUTOMATICALLY PWRS OFF	12-20

DTV

DTV

SPECIFICATIONS

VIP

PWR SOURCE: 400 Hz A/C via AC2 PAYLOAD 3 Φ (MA73C:E)
PWR DRAW: 6.84 Watts
FUSES: F1 = 5 amp
 F2 = 2 amp
WEIGHT: 4.19 lb
DIMENSION: 10.5" (L) X 5.25" (W) X 2.69" (H)

VTR (SONY DSR-25)

PWR SOURCE: 13.2 VDC via MUX
PWR DRAW: 12.88 to 33.6 Watts (depending on mode)
TAPE: Standard DVCAM or Mini DVCAM
TAPE LENGTH: 3 hr or 40 min
AUDIO: 2 Channel, 16 bit at 48 KHz
CLOCK PWR: 300 hr internal rechargeable capacitor (after 8 hr charge)
OPERATING TEMP: 41 degF to 104 degF
WEIGHT: 9 lb
DIMENSION: 15.5" (L) X 8.37" (W) X 3.87" (H)


MUX

PWR: 28 VDC via PAYLOAD AUX bus (R1)
PWR DRAW: 39.76 to 72.8 Watts (depending on VTR,CC config)
FUSE: 5 amp
WEIGHT: 15.2 lb
DIMENSION: 19" (L) X 17.88" (W) X 3.45" (H)

DTV (Continued)



NOMENCLATURE

VIP

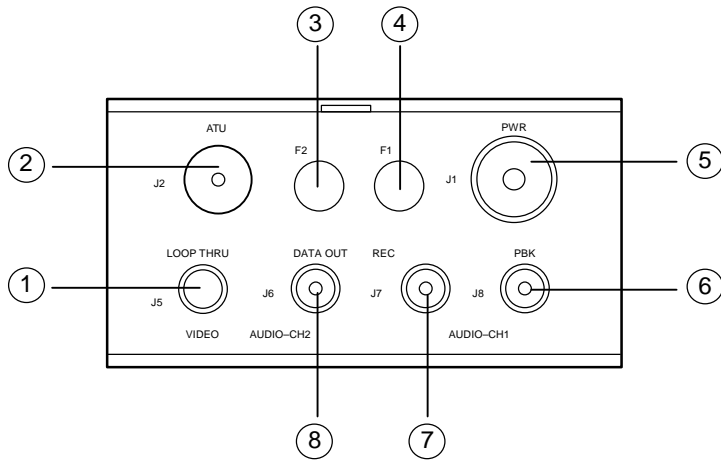

BACK

- ① Video Loop Thru Connector (J5)
- ② ATU Audio Connector (J2)
- ③ F2: 2-Amp Fuse
- ④ F1: 5-Amp Fuse
- ⑤ AC Pwr Connector (J1)
- ⑥ Playback Audio Connector (J8)
- ⑦ Record Audio Connector (J7)
- ⑧ Interval DATA OUT Connector (J6)

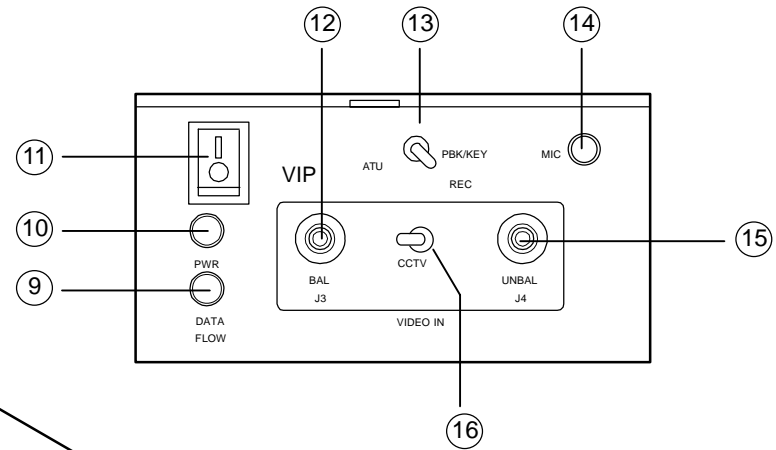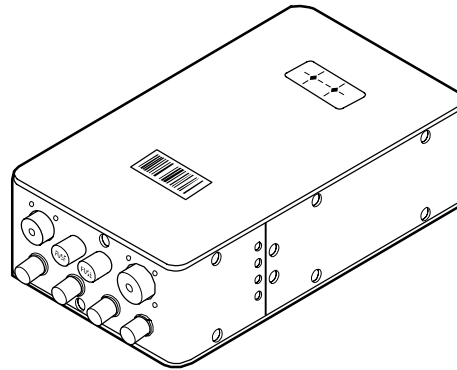

FRONT


- ⑨ Data Flow LED (green)
- ⑩ PWR LED (green)
- ⑪ PWR sw
- ⑫ Balanced Video Connector (J3)
- ⑬ ATU sw
- ⑭ PLAYBACK/KEY MIC LED
- ⑮ Unbalanced Video Connector (J4)
- ⑯ CCTV VIDEO IN sw

jsc48037_054_r1.cvx

DTV (Continued)

NOMENCLATURE (Continued)

VTR (SONY DSR-25) – FRONT PANEL

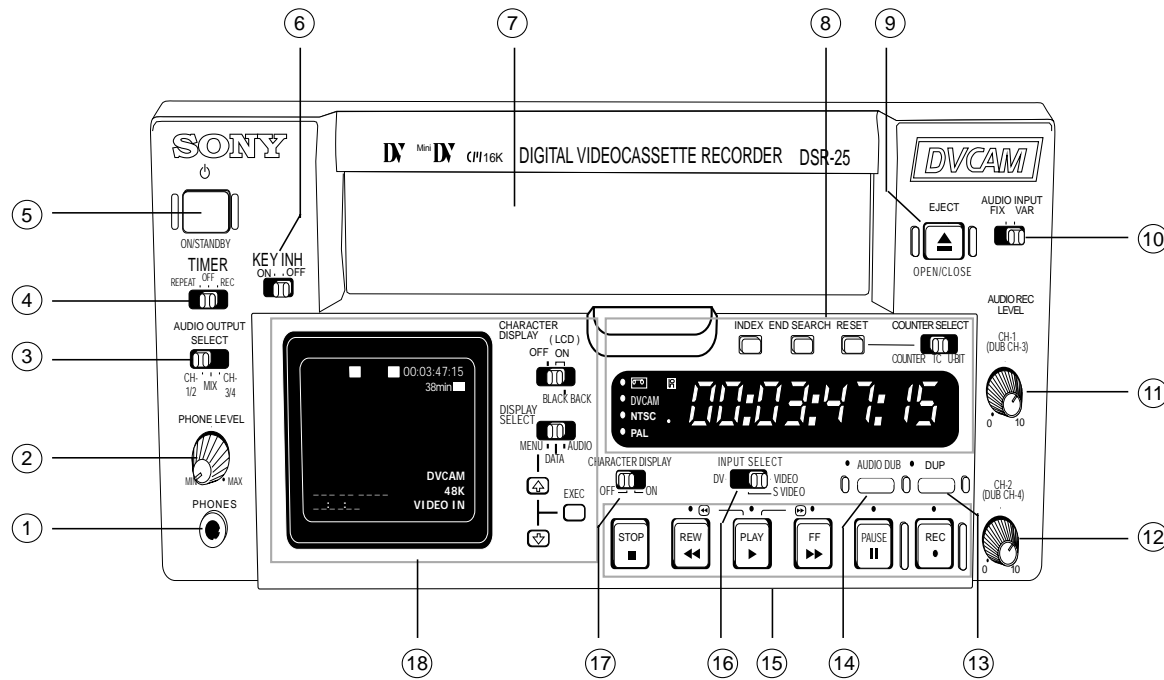

- ① Phone Jacks
- ② PHONE LEVEL Control kb
- ③ AUDIO OUTPUT SELECT sw (CH 1/2)
- ④ TIMER sw (OFF)
- ⑤ ON/STANDBY pb, LED (red/green)
- ⑥ KEY INH sw (OFF)
- ⑦ Cassette Compartment
- ⑧ Display Window and Controls
- ⑨ EJECT pb
- ⑩ AUDIO INPUT sw (FIX)
- ⑪ CH-1 AUDIO REC LEVEL Control kb (N/A)
- ⑫ CH-2 AUDIO REC LEVEL Control kb (N/A)
- ⑬ DUP pb (not used)
- ⑭ AUDIO DUB pb (N/A)
- ⑮ Tape Transport Controls
- ⑯ INPUT SELECT sw (VIDEO)
- ⑰ CHARACTER DISPLAY sw (OFF)
- ⑱ Monitor Display and Controls

jsc48037_139r4.cvx

DTV (Continued)

NOMENCLATURE (Continued)


VTR (SONY DSR-25) – FRONT PANEL (Concluded)

①	PHONES jack	Stereo headphone connection point to monitor live(playback) audio
②	PHONE LEVEL kb	Controls headphone jack volume level
③	AUDIO OUTPUT SELECT sw (Default = CH 1/2)	Determines which audio channels are output in 32 kHz mode only
④	TIMER sw (Default = OFF)	Used to auto repeat a tape or automatically start recording once pwr is applied to VTR
⑤	ON/STANDBY pb, LED (red/green)	Changes pwr mode of VTR between STANDBY (red LED) and ON (green LED). Will automatically go to ON when MUX pwr applied
⑥	KEY INH sw (Default = OFF)	Disables all pbs when ON
⑦	Cassette Compartment	Tape insertion location, door opened/closed via EJECT pb
⑧	Display windows and controls	See 12-6 for details
⑨	EJECT pb	Opens/closes cassette compartment door and ejects tape, if installed
⑩	AUDIO INPUT sw (Default = FIX)	Enables/disables AUDIO REC LEVEL control knobs. FIX sets fixed gain based on AUDIO INPUT LEVEL sw on rear of VTR
⑪	CH-1 AUDIO REC LEVEL kb (N/A)	Controls audio level of orbiter audio
⑫	CH-2 AUDIO REC LEVEL kb (N/A)	Controls audio level for VI data
⑬	DUP pb (not used)	Used for tape-to-tape recording to duplicate the time code
⑭	AUDIO DUB pb (N/A)	Used for tape-to-tape recording to duplicate the 32 kHz mode audio channels
⑮	Tape Transport Controls	See 12-7 for details
⑯	INPUT SELECT sw (Default = VIDEO)	Determines which video input jack the VTR will process
⑰	CHARACTER DISPLAY sw (Default = OFF)	Determines if VTR monitor text is displayed in VTR OUT video
⑱	Monitor Display and Controls	See 12-8 for details

DTV (Continued)

NOMENCLATURE (Continued)

VTR (SONY DSR-25) – DISPLAY WINDOW AND CONTROLS

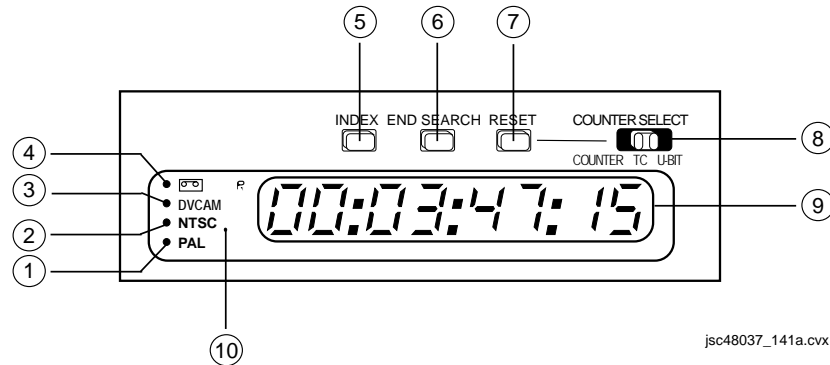


jsc48037_141a.cvx

①	PAL Indicator/Amber (not used)	Lit when NTSC/PAL sw is in PAL posn or PAL formatted video being processed by the VTR
②	NTSC Indicator/Amber (on)	Lit when NTSC/PAL sw is in NTSC posn or NTSC formatted video being processed by the VTR
③	DVCAM Indicator/Amber (on)	Lit when the VTR is playing a DVCAM-formatted tape or when the VTR is set to DVCAM
④	Cassette Indicator/Amber	Lit solid when a tape is loaded into the VTR. Flashes during tape ejection
⑤	INDEX pb	Initiates index mark on the tape that can be used to cue the tape to that posn on the tape via INDEX SEARCH
⑥	END SEARCH pb	VTR will search for the last 5 sec of recorded video, play it, and return to stop mode
⑦	RESET pb	Resets COUNTER displayed numbers to all zeroes
⑧	COUNTER SELECT sw	Determines which time data will be displayed in the counter display
	COUNTER	Count value of the counter (DD:HH:MM:SS)
	TC	Time code
	U-BIT	User bits (not used)
⑨	Time Counter Display	Displays time data (counter/time code/user bits). Self-diagnosis code numbers or error msgs
⑩	Remote Control Detector	Self explanatory

DTV (Continued)

NOMENCLATURE (Continued)

VTR (SONY DSR-25) – TAPE TRANSPORT CONTROLS

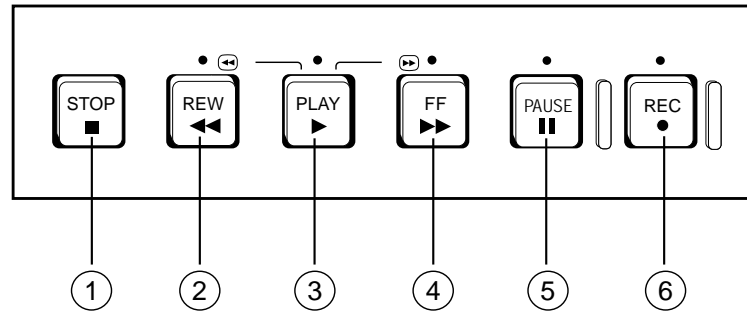


jsc48037_141b.cvx

①	STOP pb	Stops current tape transport operation
②	REW pb/Indicator/Amber	Rewinds tape and illuminates the REW indicator. Video not visible unless held during play or play/pause mode
③	PLAY pb/Indicator/Green	Starts playback ops and illuminates the PLAY indicator
④	FF pb/Indicator/Amber	Fast forwards tape and illuminates the FF indicator. Video not visible unless held during play or play/pause mode
⑤	PAUSE pb/Indicator/Amber	Pauses playback or recording ops
⑥	REC pb/Indicator/Red	Pressing PLAY pb while holding in REC pb will start recording and both PLAY and REC indicators will illuminate. Just pressing REC pb will illuminate the REC indicator and allow for audio,video monitoring

DTV (Continued)

NOMENCLATURE (Continued)

VTR (SONY DSR-25) – MONITOR DISPLAY AND CONTROLS

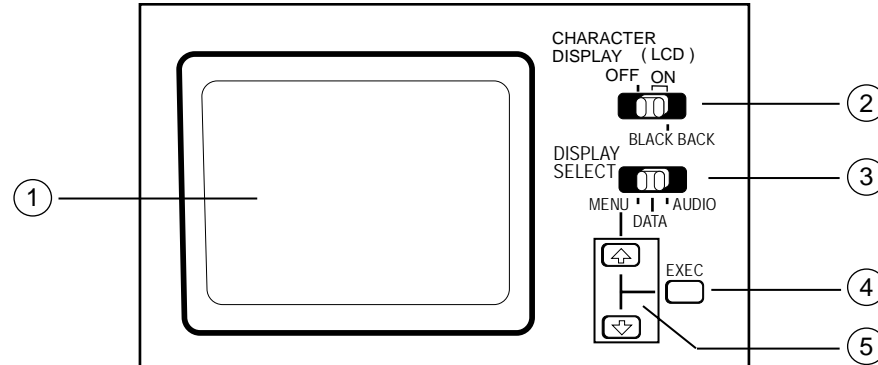


jsc48037_141c.cvx

①	LCD Monitor	Displays playback(live) video and superimposed text, audio levels, and menu data
②	CHARACTER DISPLAY (LCD) sw (Default = ON)	Controls the display of superimposed text on the monitor. BLACK BACK will block video flow to the monitor to provide a black background to improve superimposed data viewing
③	DISPLAY SELECT sw	Determine what superimposed data is displayed on the monitor
	MENU	Menu data
	DATA	VTR information
	AUDIO	Audio levels
④	EXEC pb	Executes and selects menu items
⑤	↑↓ pbs	Allows navigation through and setting of menu items when in MENU mode, and adjusts monitor brightness when in DATA mode

DTV (Continued)

NOMENCLATURE (Continued)

VTR (SONY DSR-25) – REAR PANEL

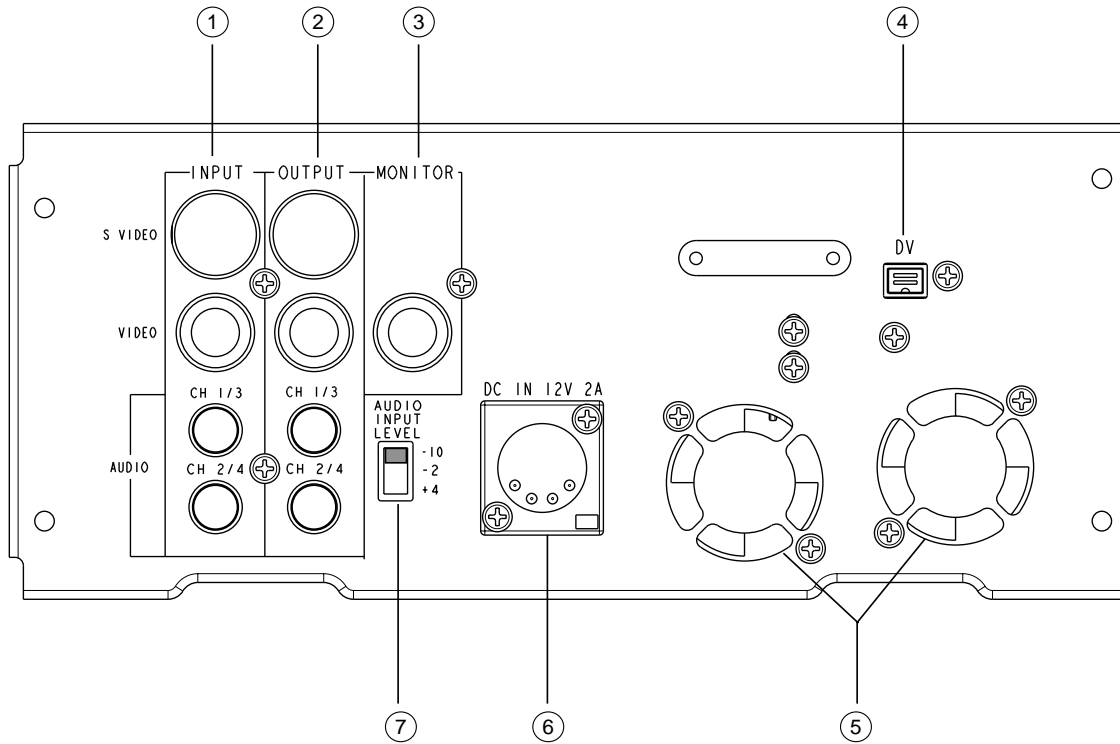

- ① INPUT Jacks
- ② OUTPUT Jacks
- ③ MONITOR Jack
- ④ DV Jack
- ⑤ Cooling Fan (two)
- ⑥ DC IN Connector
- ⑦ AUDIO INPUT LEVEL sw (-10)

jsc48037_140r4.cvx

DTV (Continued)

NOMENCLATURE (Continued)


VTR (SONY DSR-25) – REAR PANEL (Concluded)

①	INPUT Jacks	Video and audio inputs
	S_VIDEO	Not used
	VIDEO	Video input of DTV signal from orbiter VSU
	AUDIO CH-1/3	Orbiter audio input
	AUDIO CH-2/4	Orbiter "VI" input
②	OUTPUT Jacks	Video and audio outputs
	S_VIDEO	Not used
	VIDEO	VTR OUT video (No VI data)
	AUDIO CH-1/3	Orbiter audio playback output
	AUDIO CH-2/4	Not used
③	MONITOR Jack	VTR MON Video (Note: Will not display VTR Playback Video)
④	DV Jack	IEEE 1394 4-pin video/audio connection
⑤	Cooling Fans	Reversed to bring air into unit
⑥	DC IN Connector	DC pwr source connection
⑦	AUDIO INPUT LEVEL sw	Sets the audio fixed gain level when the AUDIO INPUT is set to FIX. Default is -10. Is ignored in the VAR setting

DTV (Continued)

NOMENCLATURE (Continued)

MUX – FRONT

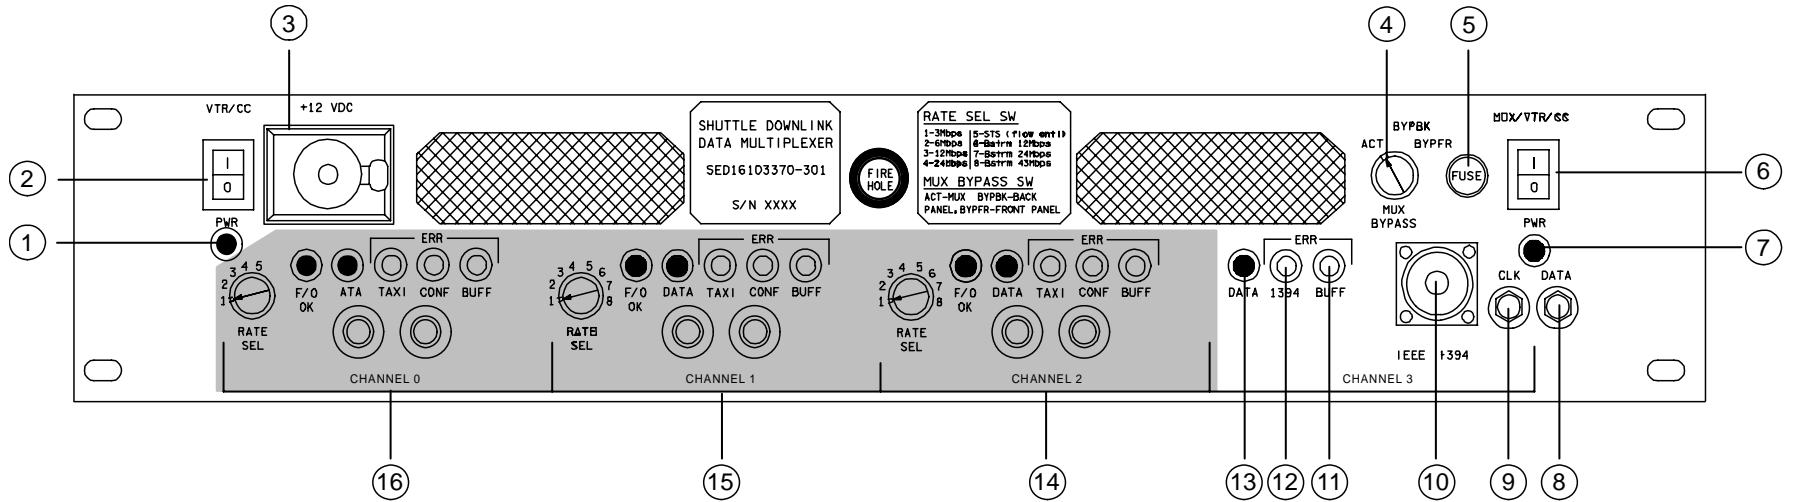


- | | |
|---------------------------|---------------------------------------|
| ① VTR/CC PWR LED (green) | ⑨ BYPFRR CLOCK Connector |
| ② VTR/CC PWR sw | ⑩ IEEE 1394 Connector |
| ③ +12 VDC Connector (N/A) | ⑪ CHANNEL 3 BUFFER ERROR LED (yellow) |
| ④ MUX BYPASS sw | ⑫ CHANNEL 3 1394 ERROR LED (yellow) |
| ⑤ MUX 5-Amp Fuse | ⑬ CHANNEL 3 DATA LED (green) |
| ⑥ MUX/VTR/CC sw | ⑭ CHANNEL 2 DATA Ports, LEDs (N/A) |
| ⑦ MUX PWR LED (green) | ⑮ CHANNEL 1 DATA Ports, LEDs (N/A) |
| ⑧ BYPFRR DATA Connector | ⑯ CHANNEL 0 DATA Ports, LEDs (N/A) |

jsc48037_058.cnv

DTV (Continued)

NOMENCLATURE (Concluded)

MUX – BACK

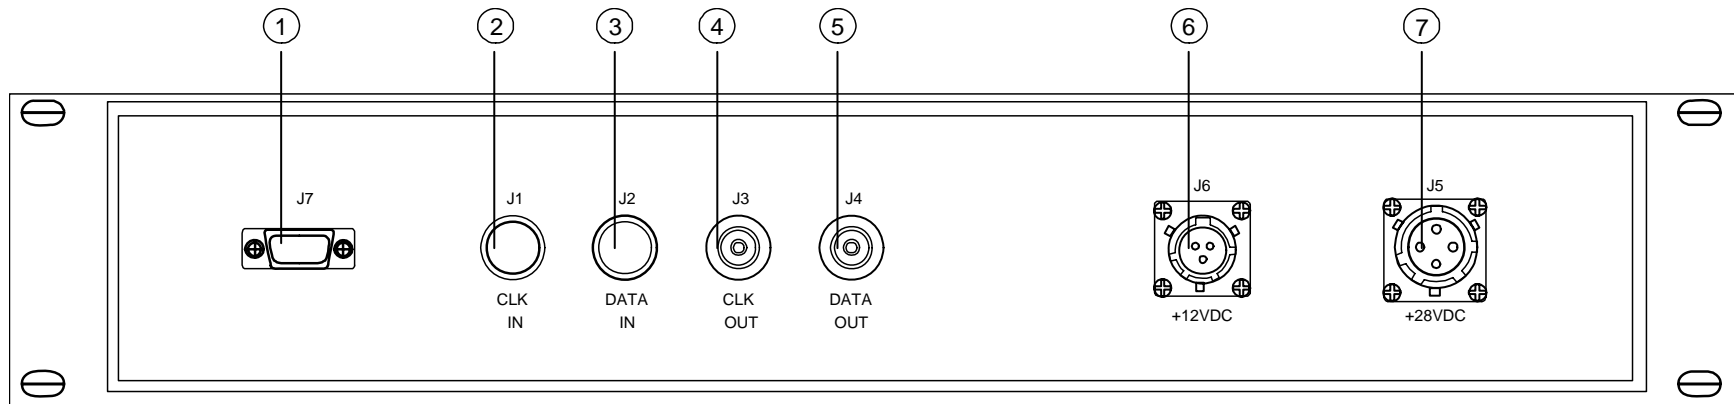

- ① DATA Port (N/A)
- ② CLOCK IN Connector (J1)
- ③ DATA IN Connector (J2)
- ④ CLOCK OUT Connector (J3)
- ⑤ DATA OUT Connector (J4)
- ⑥ +12 VDC OUTPUT Connector (J6)
- ⑦ +28 VDC INPUT Connector (J5)

jsc48037_059.cnv

MULTI-PROTOCOL CONVERTER (MPC)

SPECIFICATIONS

DOWNLINK: HDV signal via ISS High Rate Data Link (HRDL)

INTERFACES: IEEE1394 (Firewire) for HDV
RJ-45 for Ethernet to an SSC (not used)
ST for TAXI link to ISS via HRFM

POWER: 16VDC

TAXI OUTPUT: 68Mbps (maximum) bitstream only (HDV rate ~30Mbps)

HDV INPUT: 27Mbps (Average)


ETHERNET INPUT: 50Mbps maximum by UDP/IP (not used)

ETHERNET PROTOCOL: FTP, TFTP, UDP

DIMENSIONS: 203mm x 187mm x 41mm
(8" x 7.4" x 1.6")

MASS: 1.0kg (2.2 lb)

Multi-Protocol Converter

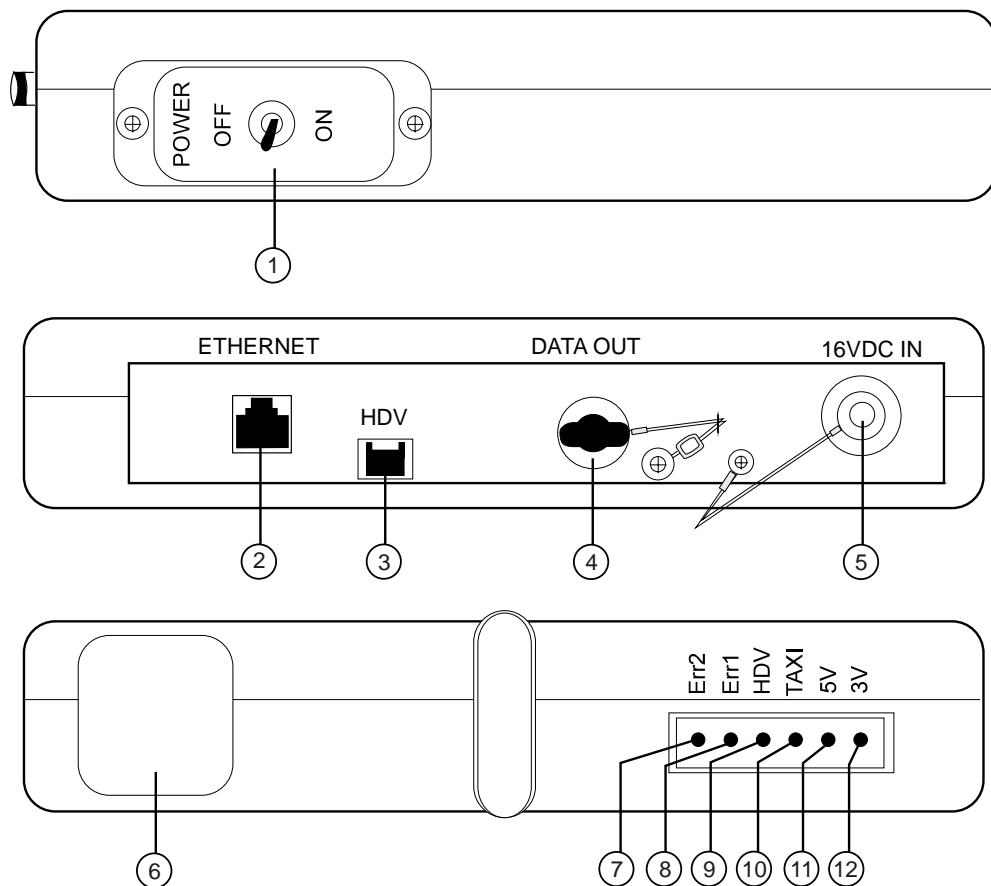

- ① sw POWER - ON/OFF
- ② ETHERNET - For file transfer
- ③ HDV - High definition video firewire input from Camcorder
- ④ DATA OUT - Processed HDV signal that goes to downlink
- ⑤ 16VDC IN - Power using a black brick.
- ⑥ Fan
- ⑦ Err2 - LED indicator for ETHERNET data dropped or lost sync
- ⑧ Err1 - LED indicator for HDV data dropped or lost sync
- ⑨ HDV - LED indicator fo HDV data received
- ⑩ TAXI - LED indicator for TAXI data forwarded
- ⑪ 5V - Power LED indicator for 5VDC/DC converter
- ⑫ 3V - Power LED indicator for 3.3VDC/DC converter

JSC48037_MPC.CVX

DTV (Continued)

VTR (SONY DSR-25) NOMINAL MENU SETTINGS

MENU	SUB MENU
TC (TC/UB SET)	TC PRESET – N/A
	UB PRESET – N/A
	DV IN TC – INTERNAL
	TC MAKE – REGEN
	TC RUN – REC RUN
	TC FORMAT – AUTO

CM (CM SET)	CM SEARCH – ON
	TITLE DISP – ON
	LABEL DISP – ON
	TAPE LABEL – N/A
	ITEM ERASE – N/A
	ERASE ALL – N/A

DISP (DISPLAY SET)	DATA CODE – DATE (non-default)
	EE/PB SEL – EE
	LTR SIZE – NORMAL
	COLOR BAR – OFF
	DATE DISP – M/D/Y
	TIME DISP – 24H

V (VIDEO SET)	PB YNR – OFF
	PB CNR – OFF


MENU	SUB MENU
A (AUDIO SET)	AUDIO MODE – FS48k (non-default)
	JOG AUDIO – OFF

VTR (VTR SET)	REC MODE – DVCAM
	AUTO INDEX – ON
	STILL PICT – AUTO
	FF/REW SPD – FF/REW
	DUPLICATE – N/A
	DV EE OUT – ON (non-default)
STILL TIME – 1 MIN (non-default)	
	FROM STILL – STOP

ETC (OTHERS)	COMMANDER – WIRELESS
	AC ON MODE – POWER ON (non-default)
	AUTO STBY – DISABLE
	BEEP – ON
	LCD BRIGHT – mid
	LCD COLOR – mid
	CLOCK SET – GMT
HRS METER – N/A	

DTV (Continued)

DTV FUNCTIONAL SCHEMATIC

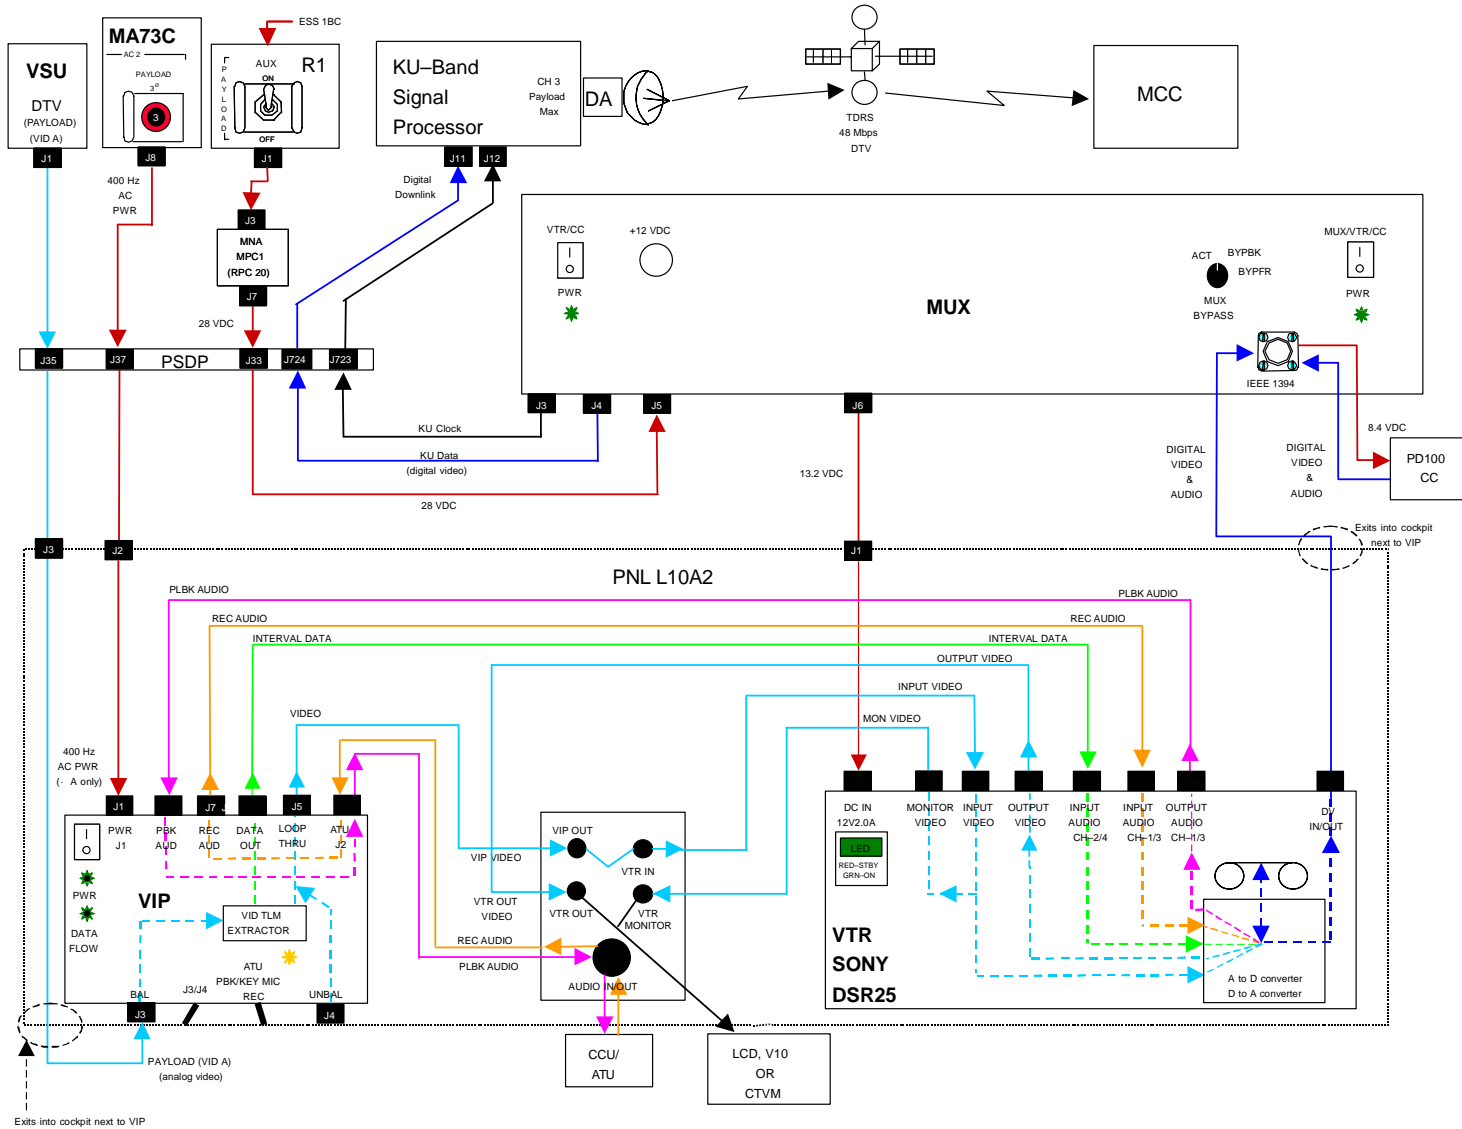

jsc48037_118_015.cvx

DTV (Continued)

VTR CLOCK SET

1. Activate VTR

R1 √PL AUX – ON

L10 (MUX) VTR/CC PWR – on (LED on)
(VTR) √ON/STANDBY LED – green

2. Set VTR clock to GMT

DISPLAY SELECT – MENU

↓ pb – ETC, EXEC pb – push

↓ pb – CLOCK SET, EXEC pb – push

Use ↑,↓,EXEC to set Y,M,D,hr,min to GMT

DISPLAY SELECT – DATA

3. Deactivate VTR as reqd

(MUX) ON/STANDBY pb – push (red LED on)
 VTR/CC PWR – off (LED off)

DTV (Continued)

MALS

12.1 NO VIDEO AT VTR OUT

- A7 √Video Signal routed to VID OUT DTV pb
- MON 2 If using CTVM:
 √SOURCE – C
- R1
MA73C √PL AUX – ON
 √cb AC2 PL 3Φ – cl
- L10 (MUX)
 (VIP) √VTR/CC(MUX/VTR/CC) PWR – on (LEDs on); if not, go to MAL 12.3
 √CCTV VIDEO IN – J3
 √PWR – on (LED on); if not, go to MAL 12.5
 √DATA FLOW LED – on; if not, go to MAL 12.6

 (VTR) √ON/STANDBY LED – green
 √INPUT SELECT – VIDEO

 If no joy, √MCC

12.2 NO DIGITAL DNLK VIDEO AT MCC

- √Video from VTR MONITOR, if none, perform MAL 12.1
 √MCC has configured Ku Signal Band Processor CH3 for PL MAX
- L10 (MUX) √MUX BYPASS – ACT
- L10 (MUX)
 (VTR) √IEEE 1394 male cable connected to IEEE 1394 port
 DISPLAY SELECT – MENU
 ↓ pb – VTR, EXEC pb – push
 ↓ pb – DVEE OUT, √ON
 DISPLAY SELECT – DATA

 (MUX) √CHANNEL 3 DATA LED – on; if not, go to MAL 12.4

 If no joy, √MCC for possible IEEE 1394 male cable replacement

DTV (Continued)

MALS (Continued)

12.3 MUX PWR LED(s) OFF

R1 √PL AUX – ON

L10 (MUX) √VTR/CC(MUX/VTR/CC) PWR – on (LEDs on)
Notify MCC before proceeding
√5 Amp Fuse (spare in DTV Fuse Kit)

If no joy, √MCC

12.4 MUX CHANNEL 3 DATA LED OFF

√DTV MAL 12.2 complete

L10 (MUX) If CHANNEL 3 1394,BUFF LEDs – on, signal not reaching MUX for processing
(VTR) | ON/STANDBY pb – push (red LED on)

L10 (MUX) MUX/VTR/CC PWR – off, wait 5 sec, on
(VTR) | √ON/STANDBY LED – green
If no joy:
Repeat pwrndn per previous steps
Disconnect,reconnect IEEE 1394 cable
Repeat pwrup per previous steps

If no joy, √MCC

If only CHANNEL 3 1394 LED – on, MUX 1394 format error

| √MCC

If only CHANNEL 3 BUFF LED – on, MUX FIFO memory buffer error

√MCC

DTV (Continued)

MALS (Continued)

12.5 VIP PWR LED OFF

MA73C √cb AC2 PL 3Φ – cl

L10 (VIP) √PWR – on
 Notify MCC before proceeding
 Pull VIP from container to check fuses
 √F1 5 Amp Fuse (spare in DTV Fuse Kit)
 √F2 2 Amp Fuse (spare in DTV Fuse Kit)

 If no joy, √MCC

12.6 VIP DATA FLOW LED OFF

MA73C √cb AC2 PL 3Φ – cl

L10 (VIP) √PWR – on
A7 √Video signal routed to VID OUT DTV pb
 √Video signal has Vertical Interval data (PLB Camrs)

L10 (VTR) DISPLAY SELECT – AUDIO
 √CHANNEL 2 AUDIO LEVEL METER indicates signal
 If signal indicated, LED failed
 Notify MCC, continue Nom Ops
 DISPLAY SELECT – DATA
(VIP) PWR – off, then on (√DATA FLOW LED flashes twice)
 If LED does not flash twice, √MCC

DTV (Continued)

MALS (Continued)

12.7 VTR ON/STANDBY RED LED OFF

R1 √PL AUX – ON

L10 (MUX) √VTR/CC(MUX/VTR/CC) PWR – on (LEDs on)
Reset internal fuse by:
VTR/CC(MUX/VTR/CC) PWR – off, wait 30 sec, on

If no joy, √MCC

12.8 VTR STARTS RECORDING OR REWINDS AND STARTS PLAYING AFTER MUX PWR APPLIED

Timer sw out of config

L10 (VTR) √TIMER – OFF

If no joy, √MCC

12.9 VTR TAPE CONTROLS NOT FUNCTIONING (VTR DISPLAY INDICATES “ERR”)

Key Inhibit sw appears to be on

L10 (VTR) √KEY INH – OFF

If no joy, √MCC

12.10 VTR DISPLAYS ERROR MSG 32

VTR has entered SAFE MODE

L10 (VTR) ON/STANDBY pb – push (red LED on)
(MUX) VTR/CC,MUX/VTR/CC PWR – off (LEDs off), wait 10 sec, on (LED on)
(VTR) √ON/STANDBY LED – green
√Error msg no longer displayed

If no joy, √MCC

DTV (Concluded)

MALS (Concluded)

12.11 VTR DISPLAYS ERROR MSG 21

VTR has detected moisture inside

L10 (VTR) Remove tape
ON/STANDBY pb – push (red LED on)
Leave for 1 hr before re-attempting pwr on
Notify MCC

12.12 VTR AUTOMATICALLY PWRS OFF

VTR Auto Off feature on

L10 (VTR) DISPLAY SELECT – MENU
↓ pb – ETC, EXEC pb – push
↓ pb – AUTO STBY, √Disable
DISPLAY SELECT – DATA

If no joy, √MCC

BPSMU

	<u>PAGE</u>	
BPSMU SPECIFICATIONS	13-2	'
BPSMU NOMENCLATURE	13-3	
BPSMU AUDIO/VIDEO	13-4	
DRAG THROUGH QD MATING	13-6	
DRAG THROUGH QD DEACTIVATION	13-8	
DRAG THROUGH QD NOMENCLATURE	13-9	

BPSMU

BPSMU

BPSMU SPECIFICATIONS

BPSMU

INTEGRAL CABLE LENGTH: 8 ft
RECOMMENDED MIC POSITION: Directly in front of mouth; 6 in. from mouth
BATT: Two 9V (pwrs mic, not speaker; launched disconnected)
BATT: 18V
BATT LIFETIME: ~7-10 days
BPSMU WEIGHT: 1.12 lb (w/batt)

BPSMU CABLES – DIRECT CCU CONNECTIONS


BPSMU TO CCU ADAPTER (1 ft): Adapts BPSMU integral cable to CCU
BPSMU/ODS ADAPTER (4 in): Adapts 4 ft A/V Cable to CCU
A/V CABLES (4 ft, 42 ft): Minimum A/V Cable config for audio ops

BPSMU CABLES – TV CONNECTIONS

A/V CABLES (4 ft, 22 ft, 44 ft, 35 ft, 42 ft) w/TVCU: Config for Camcorder thru ODS TV 1(2) port (TVCU assumes 125 ft of cable)
BPSMU A/V PATCH CABLE (10 ft): Patches ODS TV Port audio into CCU using PRI(SEC) C/L port on VPU

BPSMU (Continued)

BPSMU NOMENCLATURE

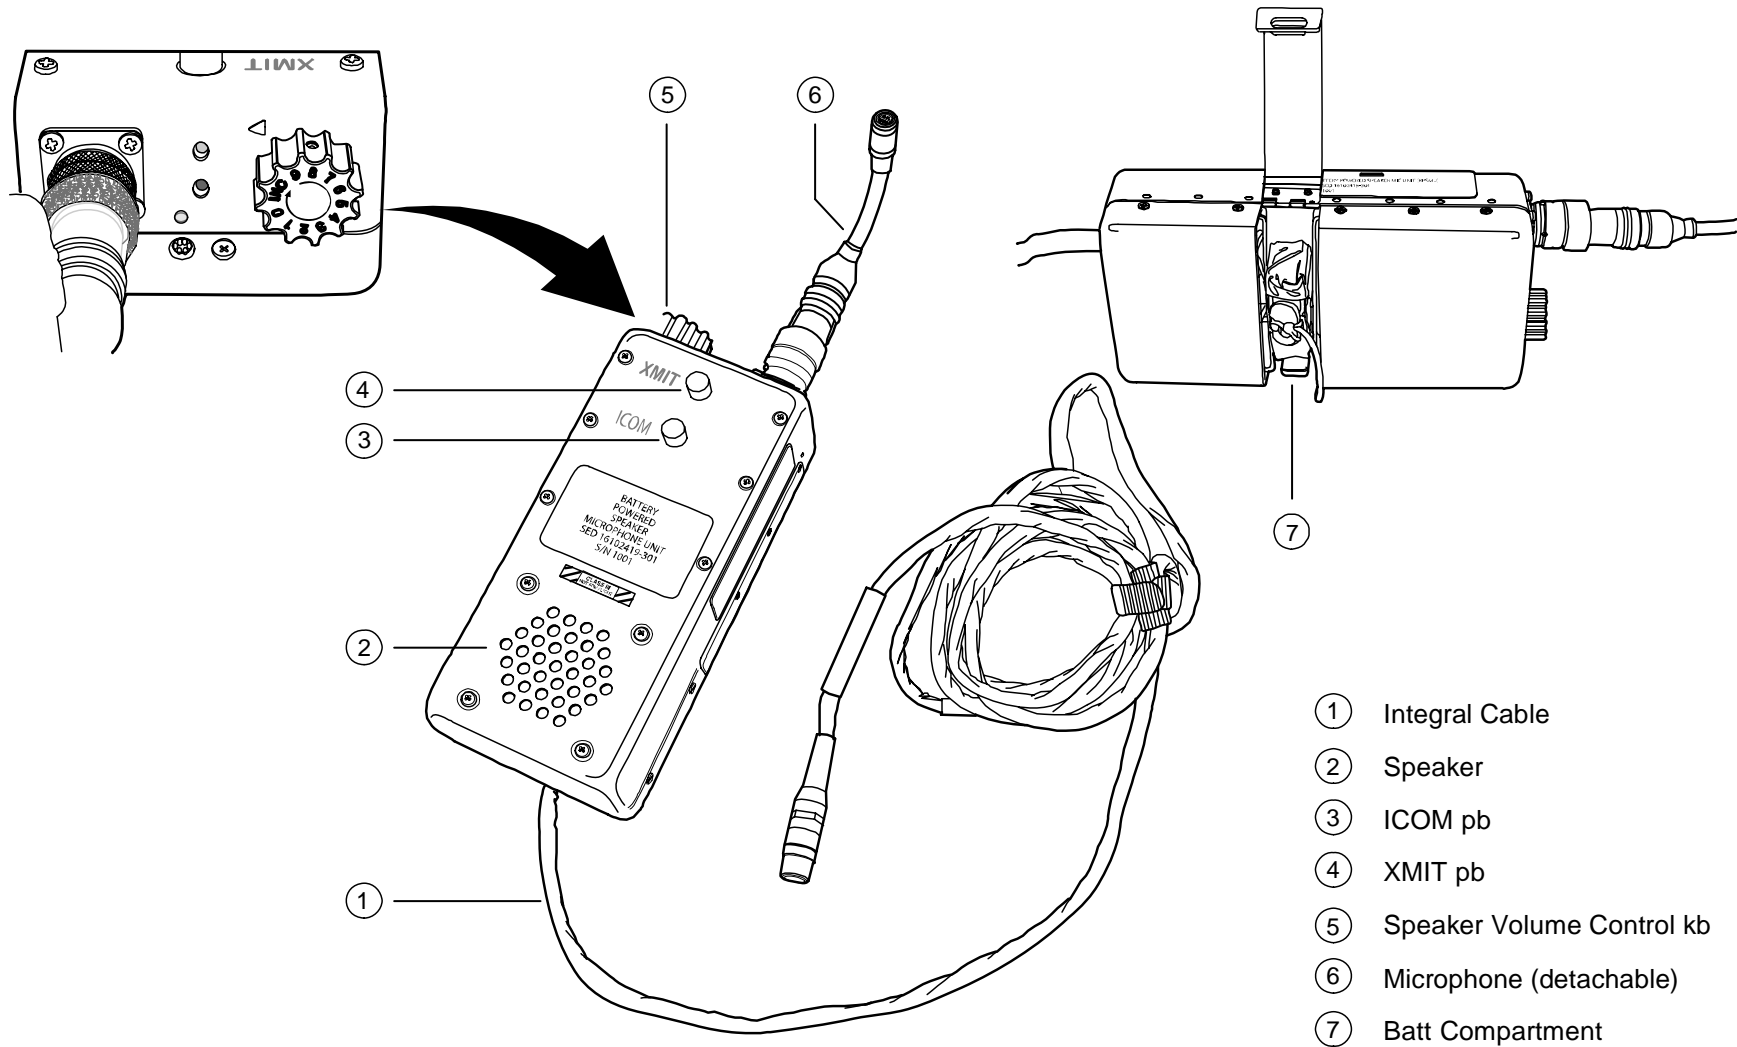


jsc48037_068.cnv

BPSMU (Continued)

BPSMU AUDIO/VIDEO

- BPSMU L12 (SSP 2)**
1. Set up BPSMU, Safe ODS TV Port
 Connect Batt
 C/L CAM PWR – OFF

 Config H/W per dwg at right
- CC**
2. Set up G1
 Install Headset
 Install Batt
 ✓Wide Conversion Lens installed
 ✓ND FILTER – OFF
 ✓OUTPUT – CAM
 ✓A/V1/V2 – V2
 ✓...-
 ✓STANDBY/LOCK – STANDBY
 PWR dial – “green”
 OPEN LCD
 ✓Tape installed as reqd
- TVCU**
3. Config TVCU
 CENTERLINE/CAMCORDER sw – CAMCORDER

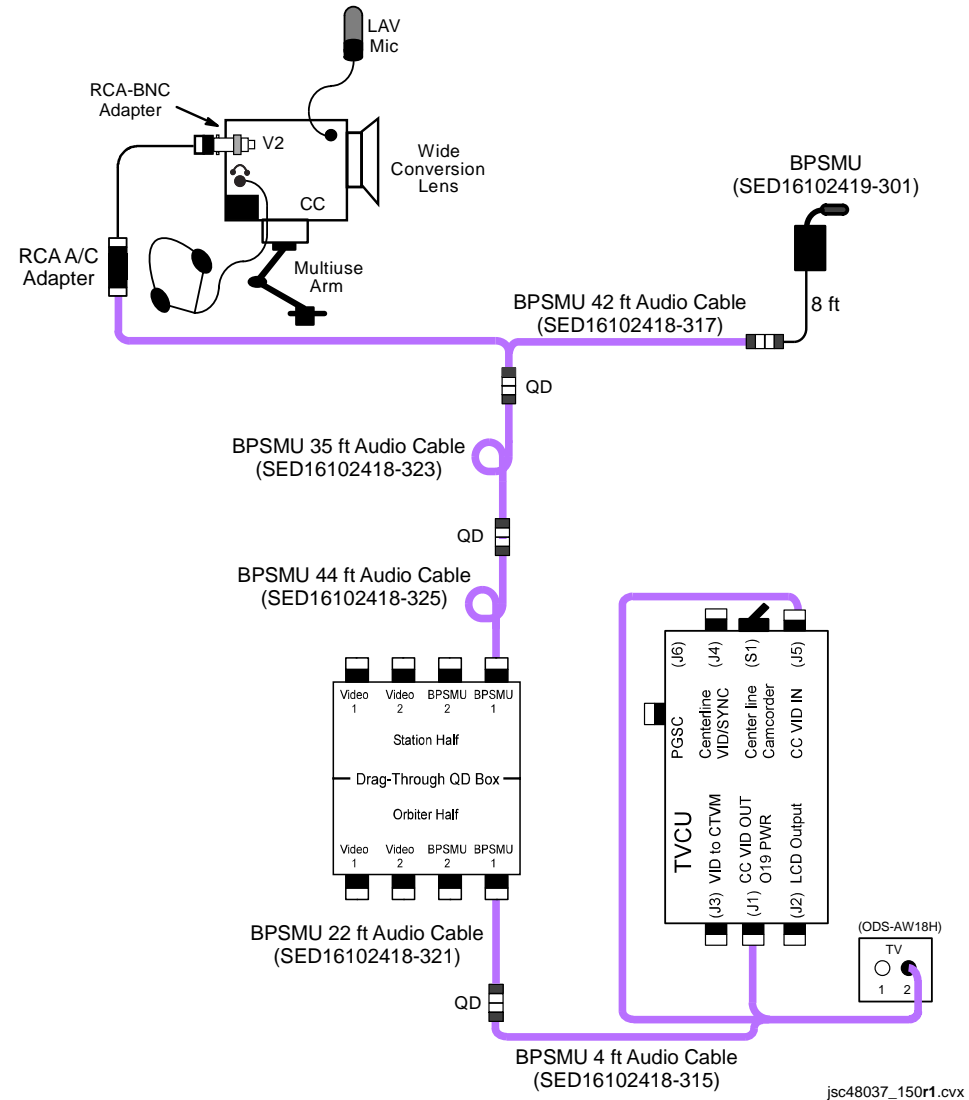

BPSMU (Continued)

BPSMU AUDIO/VIDEO (Concluded)

4. Config TV System

Config H/W per dwg at right

R12 (VPU)

Green Jumper – SEC C/L
 √VPU PWR – ON (LED on)

L12 (SSP2)

C/L CAM PWR – SEC ON

MON 1
 A7

PWR – ON (LED on)
 TV PWR CNTL – PNL
 CONTR UNIT – MNA(B)
 CNTL – CMD (wait 10 sec for system initialization)
 VID OUT MON 1 pb – push
 IN PL2(VPU) pb – push

MON 1


√CC video

O9

5. Config Comm System

R AUD PWR – AUD/TONE
 √MSTR VOL 1(2) – MAX
 A/G 2,ICOM B – T/R (or loop as desired)
 XMIT/ICOM MODE sel – PTT/PTT
 VOL A/G 2,ICOM B tw – 8
 Other Loops – OFF

Perform audio check w/BPSMU

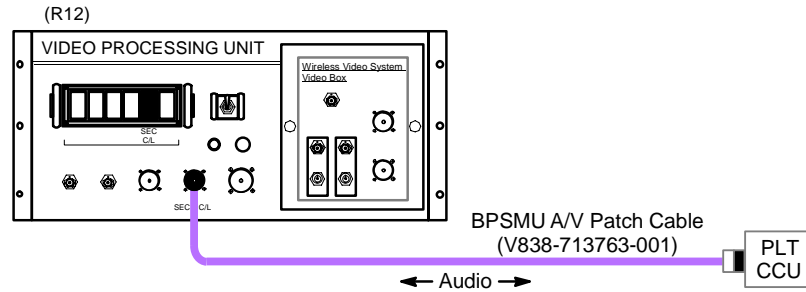

jsc48037_151.cvx


BPSMU (Continued)

DRAG THROUGH QD MATING

NOTE

If activation of quick disconnect feature of the Drag Through QD reqd, both halves (station and orbiter) are to be mated using Alignment Tool

1. Disconnect cables from orbiter half of Drag Through QD. Disconnect cables from Station half as reqd
2. Inspect connectors, mating surfaces for debris or bent pins
3. Open access hole (rotate cw)

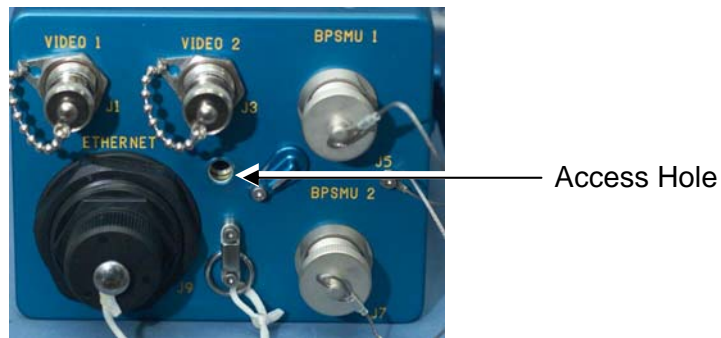


4. Remove Alignment Tool from Drag Through QD Handle Stowage (unthread ccw)
5. Place two Drag Through QD halves together, but not mated, and insert Alignment Tool into access hole



BPSMU (Continued)

DRAG THROUGH QD MATING (Continued)

6. Squeeze quick release levers together, rotate Alignment Tool cw (pressure may be needed to engage Alignment Tool threads on station half) until Alignment Tool reaches a soft stop

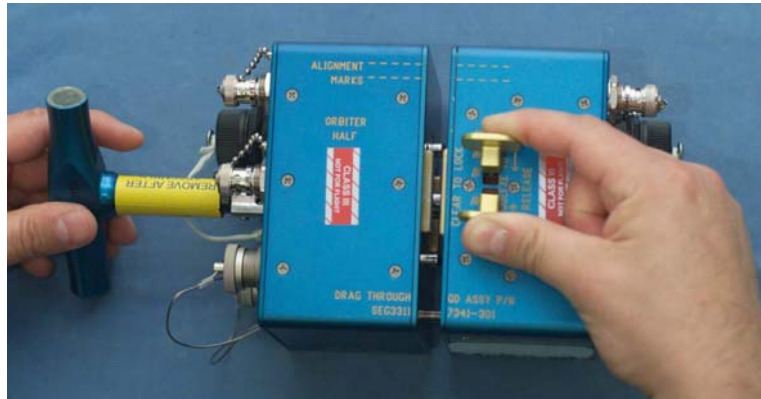

7. Release quick release levers, verify quick release levers in normal spread posn




8. Remove Alignment Tool (turn ccw)
9. Stow Alignment Tool in Drag Through QD Handle Stowage (turn cw)

BPSMU (Continued)

DRAG THROUGH QD MATING (Concluded)

10. Replace Alignment Tool on station half of Drag Through QD.

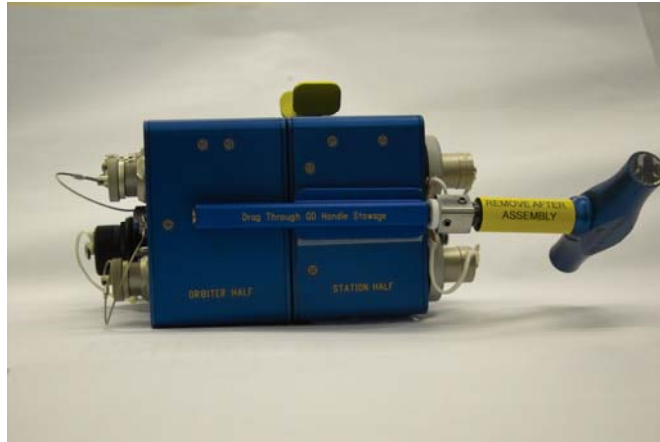


DRAG THROUGH QD DEACTIVATION

1. Disconnect RWS cables (two) from orbiter side Video 1,2 ports. Stow on orbiter stbd ditch wall
2. Disconnect BPSMU cable from ODS CCU port 1 (coil as reqd)
3. Transfer Drag Through QD and remaining attached cables to ISS

BPSMU (Continued)

DRAG THROUGH QD NOMENCLATURE

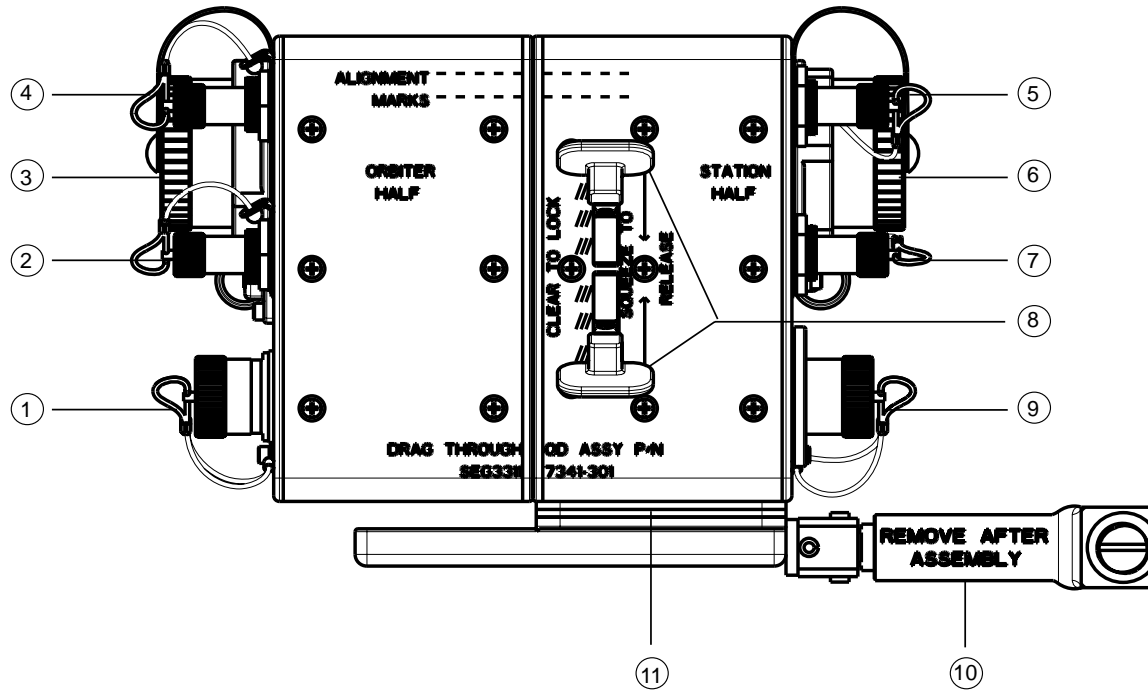

- ① BPSMU #1 (J5), BPSMU #2 (J7) directly below
- ② Video #2 (J3)
- ③ Ethernet (J9)
- ④ Video #1 (J1)
- ⑤ Video #1 (J2)
- ⑥ Ethernet (J10)


- ⑦ Video #2 (J4)
- ⑧ Quick Release Lever
- ⑨ BPSMU #1 (J6), BPSMU #2 (J8) directly below
- ⑩ Alignment Tool
- ⑪ Alignment Tool Holder

jsc48037_121_114.cvx

BPSMU (Continued)


DRAG THROUGH QD NOMENCLATURE (Continued)

STATION HALF

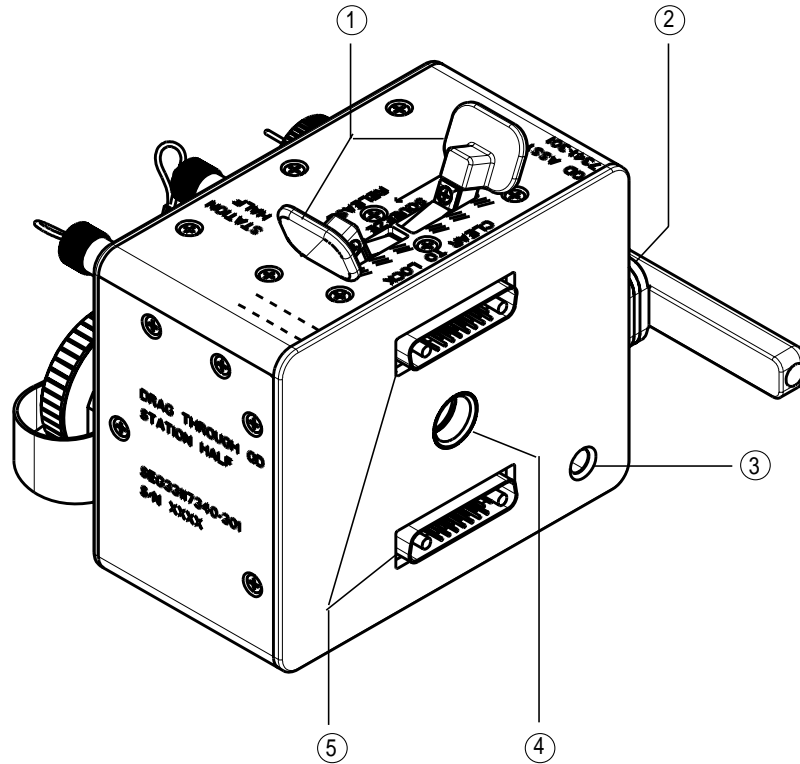

- ① Quick Release Lever
- ② Alignment Tool Holder
- ③ Alignment Pin Receptacle
- ④ Center Locking Pin Receptacle
- ⑤ DB25 Male Connector

ORBITER HALF

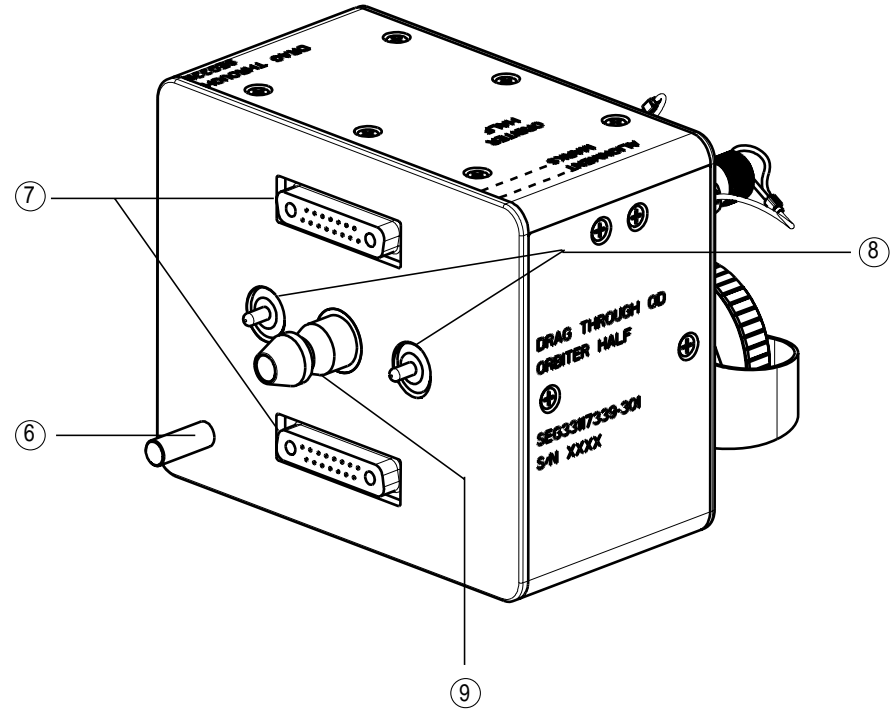


- ⑥ Alignment Pin
- ⑦ DB25 Female Connector
- ⑧ Ball Plunger
- ⑨ Center Locking Pin


jsc48037_121_115.cvx

BPSMU (Concluded)

DRAG THROUGH QD NOMENCLATURE (Concluded)

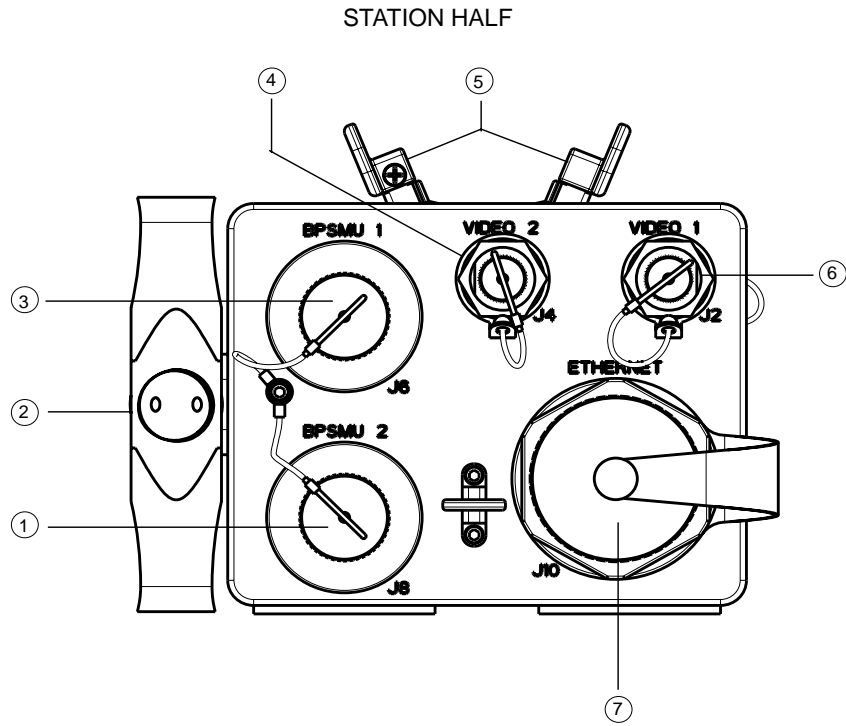

- ① BPSMU #2 (J8)
- ② Alignment Tool
- ③ BPSMU #1 (J6)
- ④ Video #2 (J4)
- ⑤ Quick Release Lever
- ⑥ Video #1 (J2)
- ⑦ Ethernet (J10)

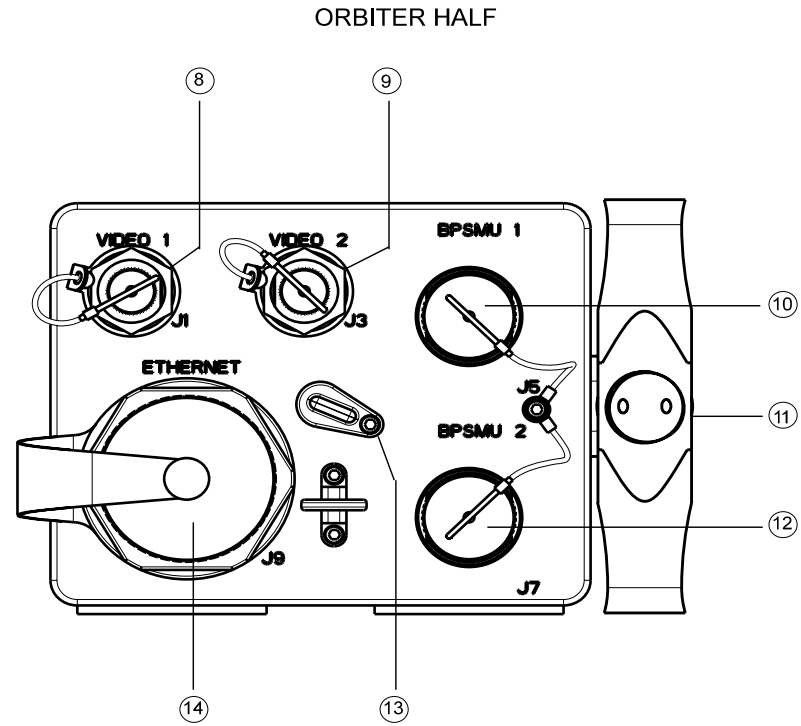

- ⑧ Video #1 (J1)
- ⑨ Video #2 (J3)
- ⑩ BPSMU #1 (J5)
- ⑪ Alignment Tool
- ⑫ BPSMU #2 (J7)
- ⑬ Alignment Tool Access Hole Cover
- ⑭ Ethernet (J9)

jsc48037_121_116.cvx

This Page Intentionally Blank

MINI-CAM

	<u>PAGE</u>
SPECIFICATIONS.....	14-2
LENS DATA.....	14-2
BRACKET DATA	14-2
NOMENCLATURE.....	14-3

MINI-CAM

SPECIFICATIONS

CAMR DIMENSIONS: 5 1/4 in (L) X 1 in (W) X 1 3/16in (D)
 WEIGHT: 0.40 lb
 IMAGER MODEL: XC-999
 HORIZONTAL RESOLUTION: 470 lines
 PIXEL COUNT: 768 Horizontal, 494 Vertical
 SENSING AREA: 6.4mm Horizontal, 4.8mm Vertical, 8.0mm Diagonal
 AVIUVOLTAGE: 12V
 WEIGHT: 1.6 lb

LENS DATA


Lens	Aperture Range (f/stop)	Approximate Horizontal Field of View (FOV)	Minimum Focus Distance	Weight (lb)	Configuration Used
3.5mm	f/1.8-f/16	84.87°	Fixed	0.10	Glareshield, Aft Window
6.0mm	f/1.4-f/16	56.15°	0.3m	0.10	Aft Window
12.0mm	f/1.4-f/16	29.86°	0.5m	0.10	HUD
23.0mm	f/1.4-f/22	15.8°	0.2m	0.31	

BRACKET DATA





Bracket	Dimensions		Mount Type
	Length	Width	
Glareshield	9.5 in - 10.5 in	2 in	Velcro w/FDF Tether
Rear Window	12 in - 20 in	2 in	Velcro w/FDF Tether
HUD	4.5-in base 1.5-in extension 2-in rise	N/A	Thumbscrew w/Tie Wrap

MINI-CAM (Concluded)

NOMENCLATURE

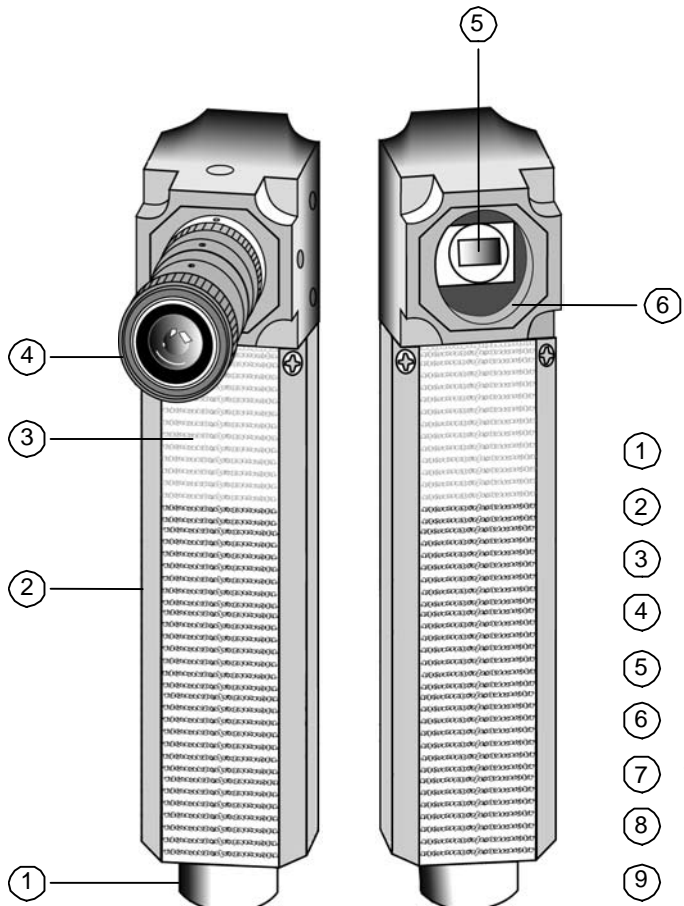

- ① Pwr/Video Connector
- ② Body (covered in Black Velcro hook)
- ③ Yellow Velcro (HUD Brkt)
- ④ Lens
- ⑤ CCD
- ⑥ Lens Mount
- ⑦ Threaded Mount
- ⑧ Aperture Ring
- ⑨ Focus Ring
- ⑩ Aperture Lock Nut

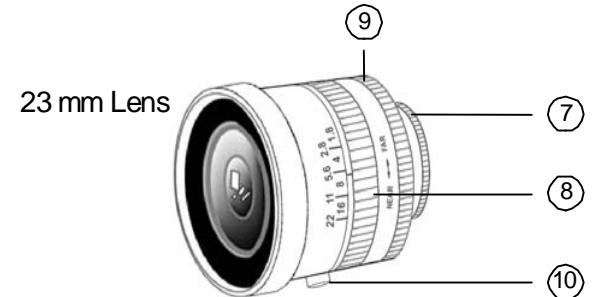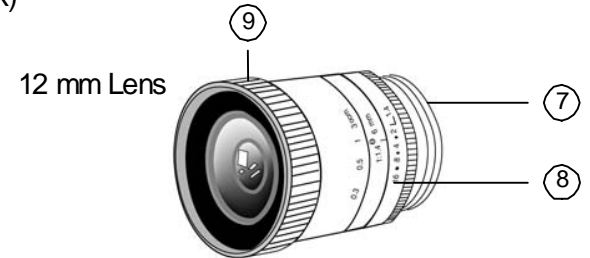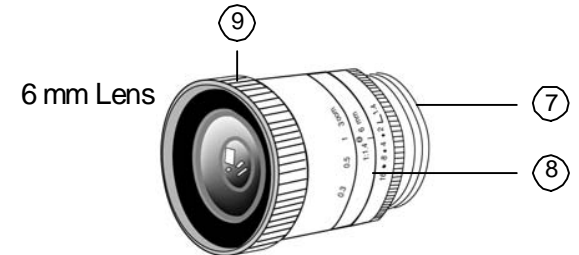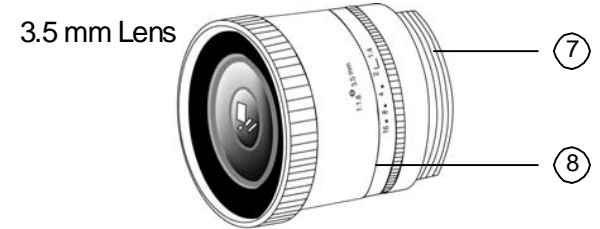

jsc48037_071r2.cvx

This Page Intentionally Blank

WIRELESS VIDEO SYSTEM (WVS)

	<u>PAGE</u>
SPECIFICATIONS.....	15-2
NOMENCLATURE.....	15-4
RF CAMR ELECTRONICS.....	15-7
WVS PLB MOUNTED H/W.....	15-8
SOFTWARE – TOP STATUS AREA.....	15-9
SOFTWARE – RF CAMR PAGE.....	15-10
SOFTWARE – XCVR PAGE.....	15-12
SOFTWARE – TELEMETRY PAGE.....	15-14

WIRELESS VIDEO SYSTEM (WVS)**SPECIFICATIONS**RF CAMR (aka EVA mobility unit Radio frequency Camr Assembly (ERCA))

MOUNTING INTERFACE: EVA helmet light structure

CAMRS: 3 per helmet

LENS FOCAL LENGTH:

LEFT: 6mm (56° HFOV) (mounted on left helmet light)

CENTER: 3.5mm (85° HFOV)

RIGHT: 12mm (30° HFOV) (mounted on right helmet light)

FOCUS CONTROL: FIXED at HYPERFOCAL

IRIS: MANUAL via PGSC

SHUTTER SPEED: AUTO(MANUAL)

GAIN CONTROL: AUTO(MANUAL) (0 to +6 dB)

WHITE BALANCE: AUTO(PRESET)

IMAGER:

MODEL: Sony XC-999

HORIZONTAL RESOLUTION: 470 lines

PIXEL COUNT: 768 Horizontal, 494 Vertical

SENSING AREA: 6.4mm Horizontal, 4.8mm Vertical, 8.0mm Diagonal

UHF RCVR ANTENNA: 1 (on top of helmet)

S-BAND XMTR ANTENNAS: 2 (on side of helmet light batts)

POWER: 12V from REBA batt enabled by pwr pb on right side of ERCA

OPERATING TEMP: -31 degC to +185 degC

PAYLOAD BAY TRANSCEIVERS (XCVR): 2 units

LOCATION: BAY 5 (under PLB liner)

OPS POWER: 28 VDC from A7/WIRELESS VIDEO POWER sw, Control Bus BC1

HTR POWER: 28 VDC from A7/WIRELESS VIDEO HEATER sw, Control Bus BC1

OPERATING TEMP: -190 degC to +210 degC

UHF PLB COMMAND ANTENNA: 1 unit

LOCATION: ODS TRUSS – AFT

WIRELESS VIDEO SYSTEM (WVS) (Continued)

SPECIFICATIONS (Concluded)

S-BAND RECEIVE ANTENNAS: Up to 7

LOCATIONS: 2 at BAY 1 PORT, STBD SILL
2 at BAY 4 PORT, STBD SILL
2 at BAY 11 PORT, STBD SILL
1 at AFT BULKHEAD

POWER: 28 VDC from A7/WIRELESS VIDEO HEATER sw, Control Bus BC1

COMMAND LINK: UHF

FREQUENCY: 400 MHz
EFFECTIVE BANDWIDTH: 12kHz
BIT RATE: 9600 bps


TELEMETRY/VIDEO LINK: S-BAND

FREQUENCY: 2410 & 2470 MHz
VIDEO BANDWIDTH: 16 MHz
TELEMETRY BANDWIDTH: 5.8 & 6.8 MHz
TELEMETRY BIT RATE: 9600 bps per channel
RANGE: 300 ft reqd, 1100 ft expected (direct line-of-sight)

WIRELESS VIDEO SYSTEM (WVS) (Continued)

NOMENCLATURE

RF CAMR MOUNTED TO EMU HELMET

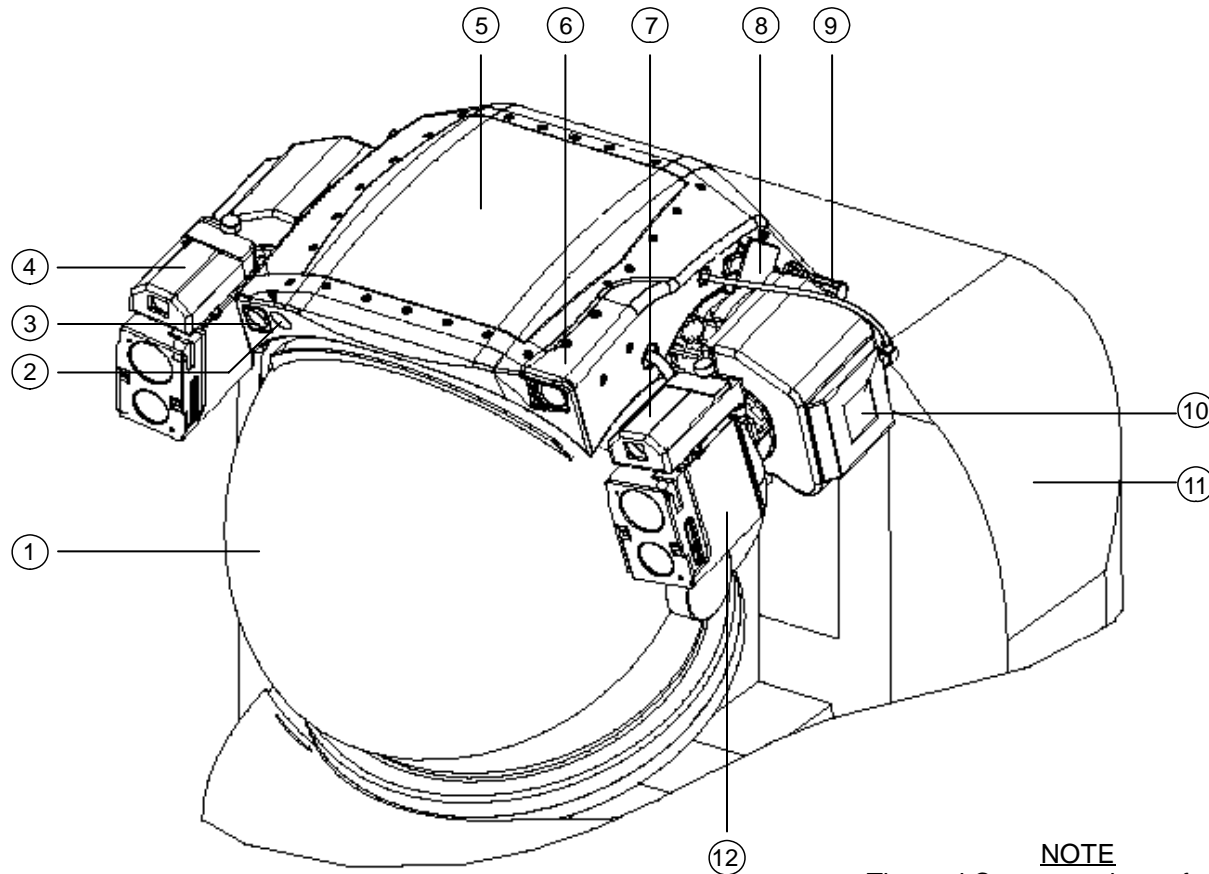

- ① EMU Helmet
- ② Pwr Indicator
- ③ Pwr sw
- ④ 12mm Lens
- ⑤ UHF Antenna
- ⑥ 3.5mm Lens
- ⑦ 6mm Lens
- ⑧ Latch (2X)
- ⑨ Pwr Receptacle
- ⑩ S-Band Antenna (2X)
- ⑪ PLSS
- ⑫ Helmet Light Module (2X)


NOTE
Thermal Cover not shown for clarity

jsc48037_075.cnv

WIRELESS VIDEO SYSTEM (WVS) (Continued)

NOMENCLATURE (Continued)

RF CAMR MOUNTED TO EMU HELMET LIGHT

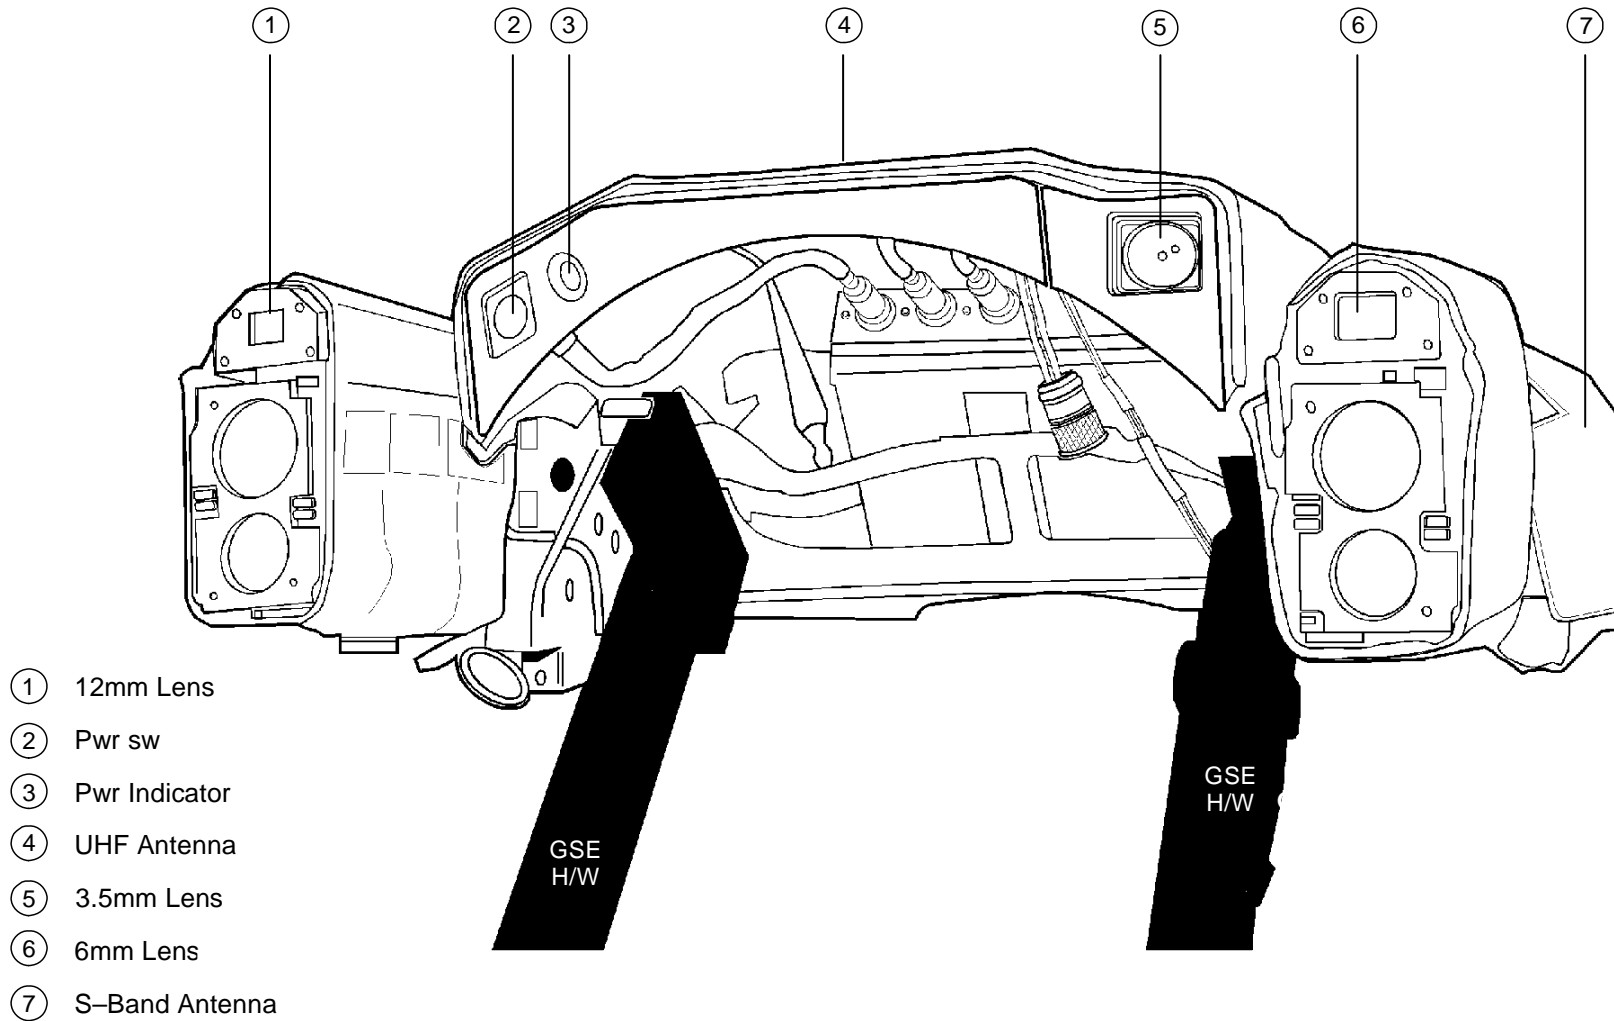


jsc48037_076.cnv

WIRELESS VIDEO SYSTEM (WVS) (Continued)

NOMENCLATURE (Concluded)


RF CAMR SHELL

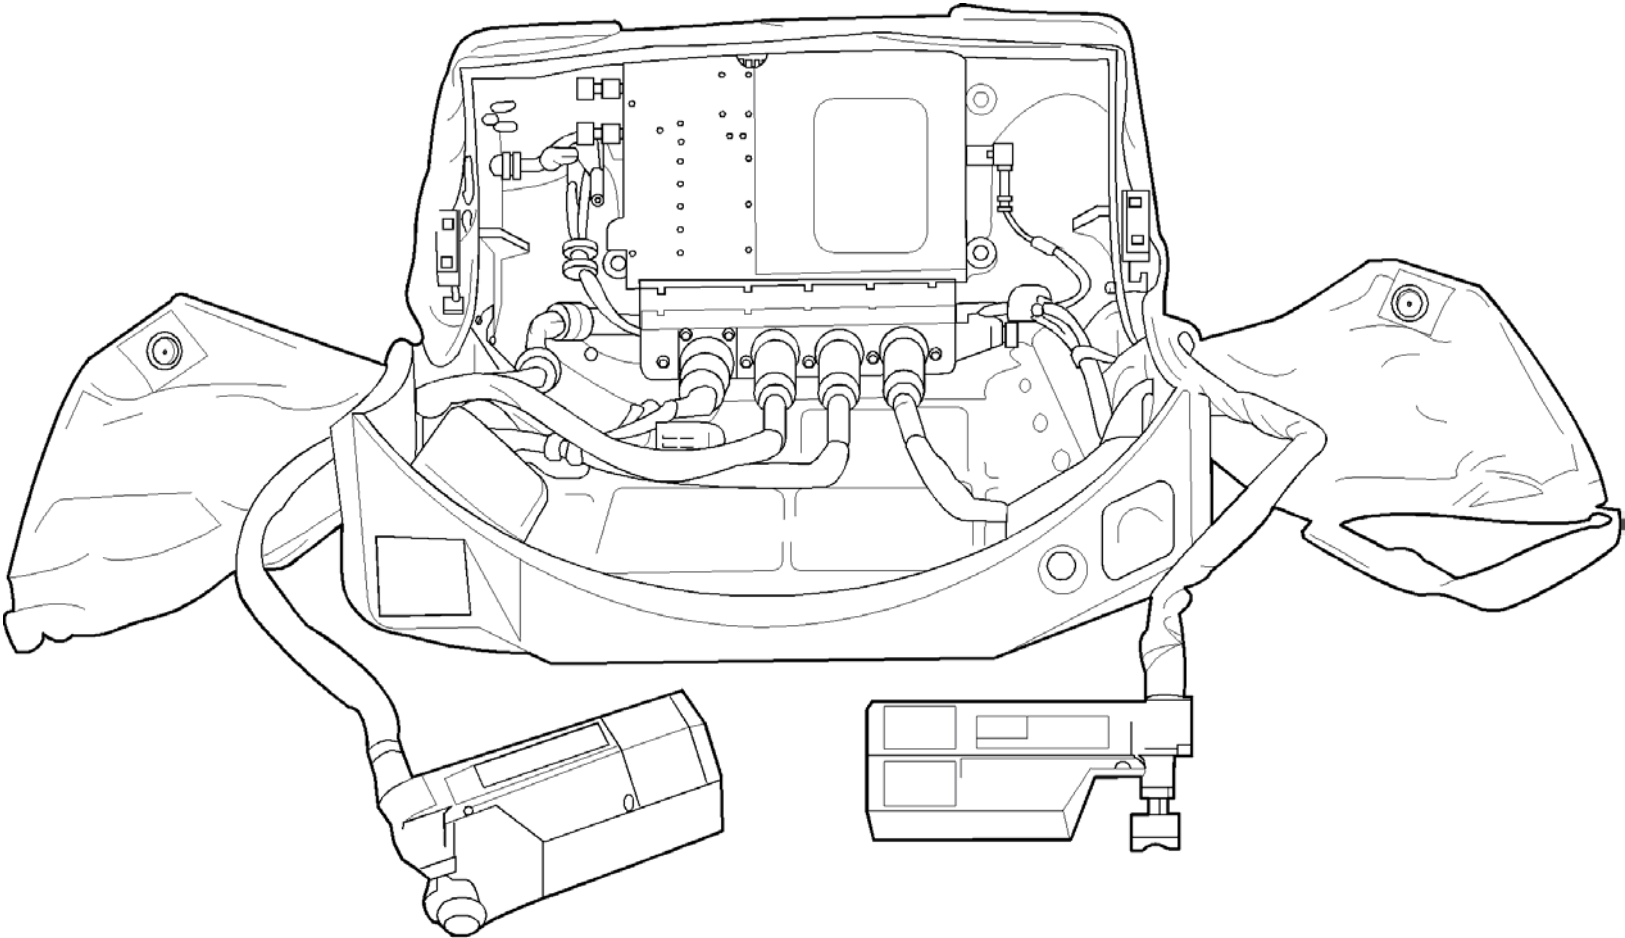

jsc48037_077.cnv

WIRELESS VIDEO SYSTEM (WVS) (Continued)

RF CAMR ELECTRONICS

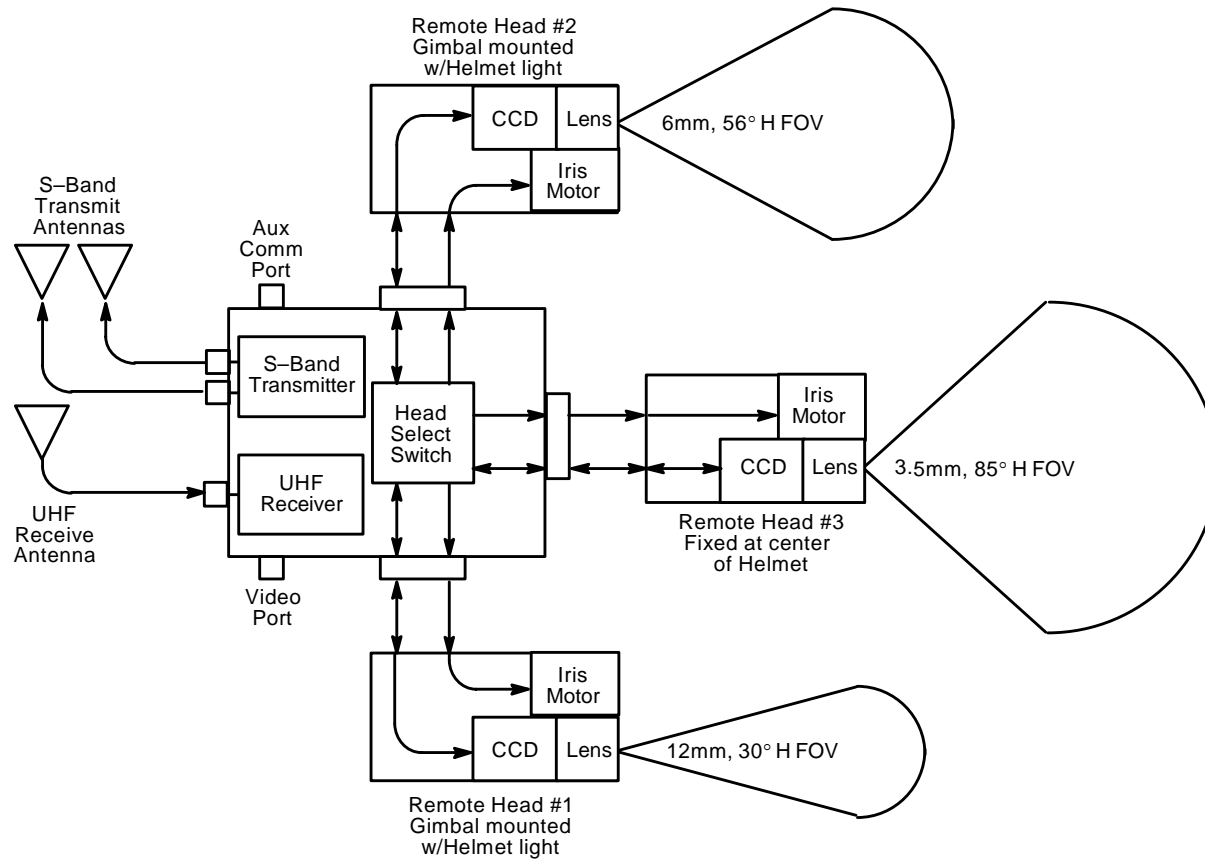


jsc48037_078r2.cnv

WIRELESS VIDEO SYSTEM (WVS) (Continued)

WVS PLB MOUNTED H/W


- ① Aft Bulkhead Antenna
- ② Mid-Body S-Band Antennas
- ③ Transceivers
- ④ Mid-Body S-Band Antennas
- ⑤ Fwd S-Band Antennas
- ⑥ UHF Cmd Antenna

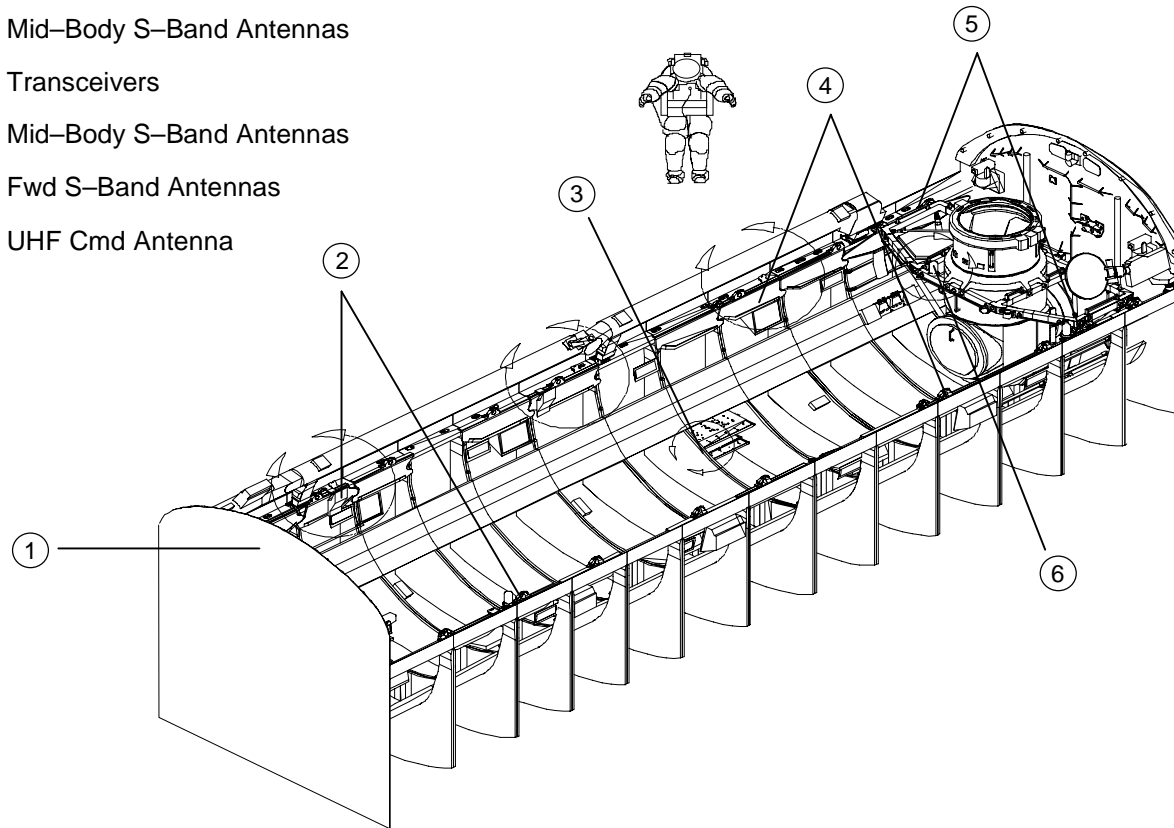

jsc48037_079r1.cvx

WIRELESS VIDEO SYSTEM (WVS) (Continued)

SOFTWARE – TOP STATUS AREA

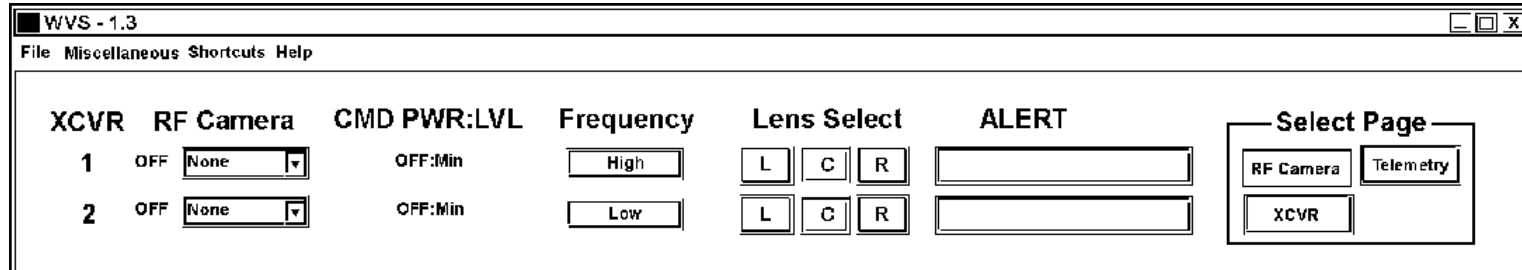

jsc48037_080.cnv

RF CAMERA Status
[ON/green / OFF/black]

RF Camr xmtr pwr status changes to ON when Camr selected (in pulldown menu)

RF CAMERA Pulldown

Selects/deselects Camr assignments to each PLB XCVR. RF Camrs will swap assignments if alternate assigned Camr selected

CMD PWR:LVL Status
[OFF:Min(Max) / ON:Min(Max)]

Denotes which PLB XCVR is processing/sending cmds (ON/OFF). Displays cmd level (Min/Max)

Frequency Status/Cmd
[High / Low]

Frequency that PLB XCVR is receiving S-Band signal from RF Camr. Will swap Camr assignments. Easiest way to swap Camr video coming from WIB connectors, recorders

Lens Select Cmd
[L,C,R]

Selects operational lens. Default is Center

ALERT Msg Display

Displays error msgs generated by system. Msgs start off flashing/blue and change to static/black when acknowledged (clicked). "Temp Caution" msg will start off flashing/yellow until acknowledged. Msgs disappear when problem fixed. Highest priority error displayed first. Five available msgs:

Static XCVR

Loss of comm between PGSC, PLB XCVR

Static RF Camera

Loss of comm between XCVR, RF Camr

Bad Camera ID

Mismatch between RF Camr selected and RF Camr transmitting ID

Temp Alert

Displays when RF Camr(PLB XCVR) temp is 5° from going into caution range (ERCA = -35° to -30° C or +80° to +85° C, XCVR = -40° to -35° C or +80° to +85° C)

Temp Caution

Displays RF Camr(PLB XCVR) temp has gone out of limits (ERCA <-35° C or >+85° C, XCVR <-40° C or >+85° C)

Select Page Icons
[RF Camera, XCVR, Telemetry]

Provides selection between the three displays

WIRELESS VIDEO SYSTEM (WVS) (Continued)

SOFTWARE – RF CAMR PAGE

The screenshot displays the 'WVS - 1.3' software interface with a menu bar (File, Miscellaneous, Shortcuts, Help). The main control area is organized into several sections:

- XCVR:** Two channels (1 and 2) are shown, both set to 'OFF' with a 'None' dropdown menu.
- RF Camera:** Two channels, both set to 'None' with a dropdown menu.
- CMD PWR:LVL:** Channel 1 is set to 'OFF:Min' and Channel 2 to 'OFF:Min'.
- Frequency:** Channel 1 is set to 'High' and Channel 2 to 'Low'.
- Lens Select:** Each channel has three buttons labeled 'L', 'C', and 'R'.
- ALERT:** Two empty text input fields.
- Select Page:** A box containing buttons for 'RF Camera', 'Telemetry', and 'XCVR'.

Below these are two identical control panels, one for 'None' and one for 'C':

- Lens Iris Control:** Includes 'Close' and 'Open' buttons with left and right arrow icons.
- Electronic Shutter:** Set to 'Auto'.
- White Balance Control:** Set to 'Auto'.

In the center is an 'Advanced Control' button. At the bottom are two identical panels:

- Automatic Gain Control:** Set to 'Disabled'.
- Power:** Includes 'ON', 'OFF', and 'MUTE' buttons.
- S-Band Level:** Set to 'Dynamic'.

jsc48037_081.cnv

WIRELESS VIDEO SYSTEM (WVS) (Continued)

SOFTWARE – RF CAMR PAGE (Concluded)

<u>Lens Iris Control</u> [Close,Open]	Opens(closes) Iris for selected lens. No telemetry other than video. Number displayed shows motor speed. Can click,hold
<u>Electronic Shutter Control</u> [Auto,Manual]	Brightens(darkens) image scene by controlling electronic shutter. Manual status runs from dark (0 = tbd sec) to bright (100 = 1/60 sec). Initial value = 50. Afterwards, setting stays where it was left
<u>White Balance Control</u> [Auto,2800K,6100K,Variable]	Determines how white balance set for Camr 2800K – PLB lights 6100K – Sunlight Variable – Allows red,blue gain control
<u>Automatic Gain Control</u> [Disabled,Enabled]	Controls status of AGC. Enabled needed for dark subjects; otherwise, it is disabled to reduce noise on video
<u>Power Status</u> [On,Off,Mute]	Status of RF Camr transmitter. Related to top status or RF Camr (black off, green on). Mute stops video signal from being sent to antenna
<u>S-Band Level</u> [Dynamic,Maximum]	Dynamic (default) – Pwr adjusted per signal strength seen at receiver (adjusted to be received at -40dB) Maximum – Sends signal at full pwr for signal strength problems
<u>Black Pedestal</u> [Increase,Decrease]	NOT USED. Brightness control varies from 0 to 100
<u>Zoom,Focus,LED Control</u>	NOT AVAILABLE. Future capabilities

WIRELESS VIDEO SYSTEM (WVS) (Continued)

SOFTWARE – XCVR PAGE

WS - 1.3

File Miscellaneous Shortcuts Help

XCVR	RF Camera	CMD PWR LVL	Frequency	Lens Select	ALERT	Select Page
1	OFF None	OFF:Min	High	L C R		RF Camera Telemetry
2	OFF None	OFF:Min	Low	L C R		XCVR

Transceiver 1

CMD Power Off

Antenna Auto

Transceiver 2

CMD Power Off

Antenna Auto

Advance Controls

Chroma Stablizer On

IF Wide

CMD Level Min

Chroma Stablizer On

IF Wide

CMD Level Min

jsc48037_082.cnv

WIRELESS VIDEO SYSTEM (WVS) (Continued)

SOFTWARE – XCVR PAGE (Concluded)

CMD Power
[OFF,ON]

Activates XCVR cmd processor. Only one XCVR can perform this duty. XCVR 1,2 selections are mutually exclusive and an ON cmd will automatically turn the other OFF. Status also shown under CMD PWR:LVL in top status area

Antenna
[Auto,Manual]

Controls antenna selection method. Auto (default) picks antenna based on strongest signal strength. Manual provides antenna number selection. Antenna numbering sequence shown on WVS cue card

Chroma Stabilizer
[On,Off]

NOT USED

Intermediate Frequency (IF)
[Wide,Narrow]

Controls bandwidth sampled for RF Camr return signal. Changed to Narrow during signal strength troubleshooting

CMD Level
[Min,Max]

NOT USED w/new spread spectrum XCVRs. Status shown under CMD PWR:LVL in top status area

WIRELESS VIDEO SYSTEM (WVS) (Continued)

SOFTWARE – TELEMETRY PAGE

WS - 1.3
File Miscellaneous Shortcuts Help

XCVR

1 OFF

2 OFF

RF Camera

OFF:Min

OFF:Min

CMD PWR LVL

High

Low

Frequency

L C R

L C R

Lens Select

L C R

L C R

ALERT

Select Page

RF Camera Telemetry

XCVR

RF Camera System Telemetry

RF Camera Lens	UHF		Power		Temperature (C)			
	Signal Strength	RX Good	Voltage	Amperes	Electronics	L	C	R
??? -1 M RM	-1.00 M	-1 M	0.00 M	0.00 M	32 M	32 M	32 M	32 M
??? -1 M RM	-1.00 M	-1 M	0.00 M	0.00 M	32 M	32 M	32 M	32 M

Transceiver Telemetry

	Temperature (C)	S Band			Power	
		Signal Strength	Antenna Select	Antenna Mode	Voltage	Amperes
XCVR 1	32 M	0.00 M	1 M	Manual M	10.00 M	10.00 M
XCVR 2	32 M	0.00 M	1 M	Manual M	10.00 M	10.00 M
Quads 1	1 0.0 M 2 0.0 M 3 0.0 M 4 0.0 M 5 0.0 M 6 0.0 M 7 0.0 M 8 0.0 M					
Quads 2	1 0.0 M 2 0.0 M 3 0.0 M 4 0.0 M 5 0.0 M 6 0.0 M 7 0.0 M 8 0.0 M					

jsc48037_083.cnv

WIRELESS VIDEO SYSTEM (WVS) (Concluded)

SOFTWARE – TELEMETRY PAGE (Concluded)

RF Camr System Telemetry

RF CAMERA

Displays RF Camr title

Lens

Displays currently selected lens

[L,C,R]

UHF Signal Strength

Displays cmd link signal strength in dB seen at RF Camr

[nom = -120 to -59]

UHF RX Good

NOT USED

Pwr Voltage

Displays RF Camr system voltage

[nom = 12.8]

Pwr Amperes

Displays RF Camr system current

[nom = 0.40]

Temperature Electronics

Displays RF Camr electronics temp in degC. Alert range = -30° to -35° C and +80° to +85° degC. Caution range = <-35° and >+85° degC

[nom = 13 to 30]

Temperature L,C,R

Displays RF Camr left Camr temp in degC. Alert range = -30° to -35° C and +80° to +85° C. Caution range = <-35° C and >+85° C

[nom = 0 to 33]

Transceiver Telemetry

XCVR 1,2 Temperature

Displays XCVR temp in degC. Alert range = -40° to -35° C and +80° to +85° C. Caution range = <-40° and >85° C

[nom = 18 to 37]

S-Band Signal Strength

Displays return signal strength seen at XVCR in dB

[nom = 97.5 to -10.5]

S-Band Antenna Select

Displays which S-Band antenna the XCVR is using to get video signal

S-Band Antenna Mode

Displays XCVR antenna selection mode

[Auto,Manual]

Power Voltage

Displays XCVR system voltage

[nom = 12.42]

Power Amperes

Displays XCVR system current

[nom = 1.10]

Quads 1,2

Displays current signal strength for each XCVR's selected S-Band antenna in dB showing strongest of antenna quads

This Page Intentionally Blank

SEQUENTIAL STILL VIDEO (SSV)

	<u>PAGE</u>
SPECIFICATIONS.....	16-2
NOMENCLATURE.....	16-2
TEST PATTERN VIA SSV.....	16-3
SSV TLM DNLK.....	16-3
SSV DEACTIVATION.....	16-4
MALS.....	16-5
16.1 PWR LED NOT LIT.....	16-5
16.2 FRONT PANEL LEDs NOT INDICATING CORRECTLY.....	16-5


SSV

SEQUENTIAL STILL VIDEO (SSV)


SPECIFICATIONS

DIMENSIONS: 8.5 in (L) x 4.245 in (W) x 2.72 in (H)
 PWR: 28V
 FUSE: 2A
 WEIGHT: 3.02 lb

NOMENCLATURE

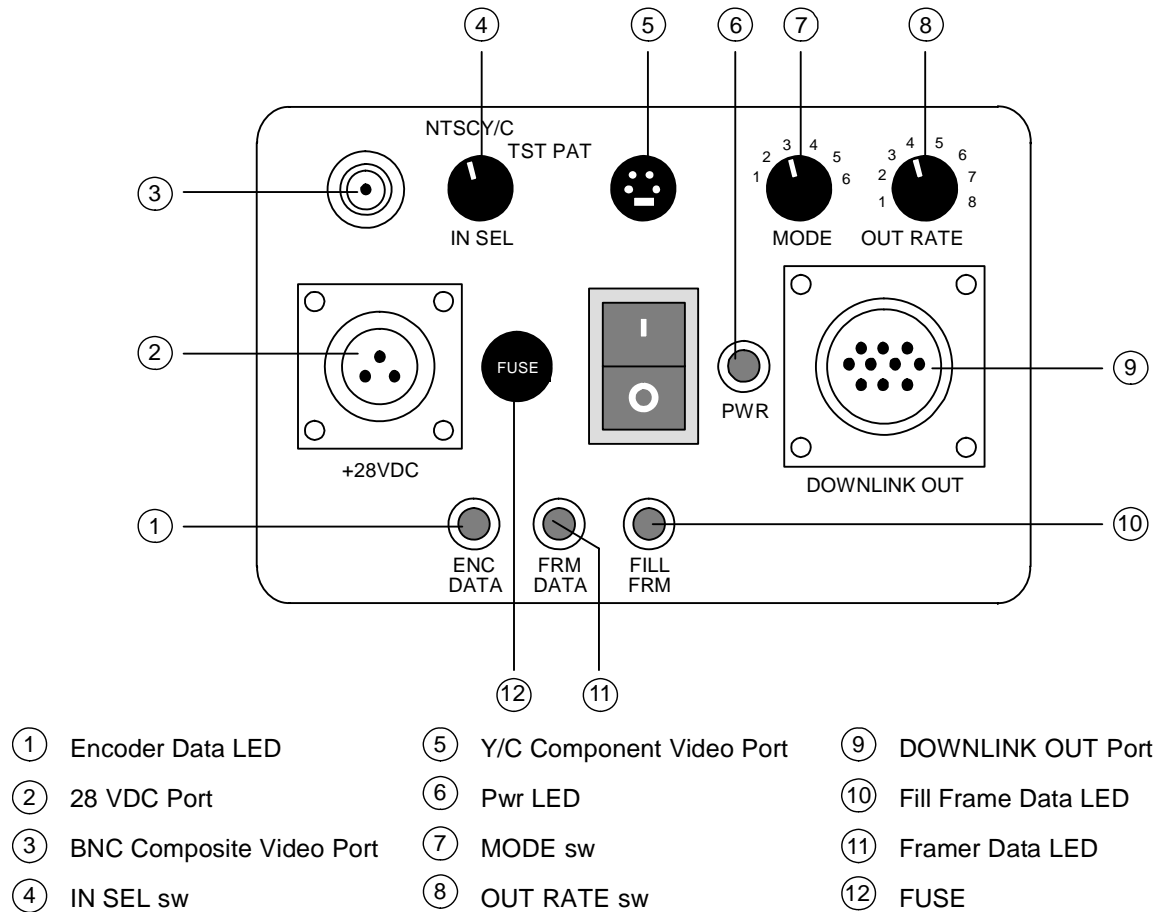

TOP DECAL

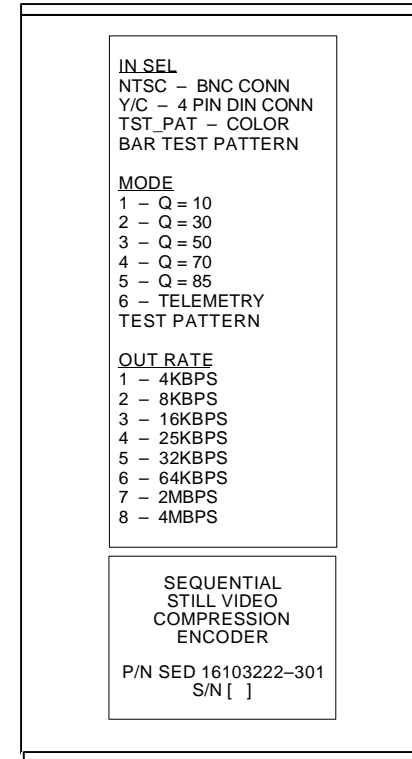

jsc48037_085.cnv

SEQUENTIAL STILL VIDEO (SSV) (Continued)

TEST PATTERN VIA SSV

1. Perform SSV NOMINAL SETUP, step 1 (PHOTO/TV FS, SCENES)
2. SSV Settings
 - IN SEL – TEST PAT
 - Mode – 3 (may change if desired)
 - OUT RATE per FLIGHT PLAN
 - SSV Pwr – ON
 - √Pwr LED illum
 - √ENC DATA LED flickering
 - √FRM DATA LED flickering
 - √FILL FRM pulsing

SSV TLM DNLK

1. Perform SSV NOMINAL SETUP, step 1 (PHOTO/TV FS, SCENES)
2. SSV Settings
 - IN SEL – NTSC
 - Mode – 6
 - OUT RATE per FLIGHT PLAN
 - SSV Pwr – ON
 - √Pwr LED illum
 - √ENC DATA LED flickering
 - √FRM DATA LED flickering
 - √FILL FRM pulsing

SEQUENTIAL STILL VIDEO (SSV) (Continued)

SSV DEACTIVATION

1. SSV
SSV Pwr – off
 - √Pwr LED not illuminated
 - √ENC DATA LED not illuminated
 - √FRM DATA LED not illuminated
 - √FILL FRM LED not illuminated
- L11
(PDIP 2)
2. TV System
Go to DEACTIVATION (Cue Card, TV) as reqd

SEQUENTIAL STILL VIDEO (SSV) (Concluded)

MALS

16.1 PWR LED NOT LIT

- √Fuse
Replace fuse if blown w/fuse from SSV Fuse Kit
(SED 15500338-301)

- √DC Pwr from orbiter util

16.2 FRONT PANEL LEDs NOT INDICATING CORRECTLY

- Cycle pwr on SSV Compression Encoder
SSV Pwr – 0 (off)
Wait 5 sec
SSV Pwr – 1 (on)

- √Cables
- √Video source

This Page Intentionally Blank

BINOCULARS

PAGE

SPECIFICATIONS..... 17-2

BINOCULARS

BINOCULARS

SPECIFICATIONS

Model	Stabilization	Pwr	Magnification	Objective Lens (mm)	Exit Pupil	Approx FOV	Approx Linear FOV @ 1000 yd	Approx Minimum Focus (ft)	Weight (lb)
Zeiss 8 X 20	No	N/A	8X	20	2.5mm	6.6°	346.5 ft	9.0	0.39
Fuji 10 X 40 Day/Night	Yes (Gyro)	6AA	10X	40	4.5mm	5.0°	210.0 ft	65.0	5.5
Fuji 16 X 70	No	N/A	16X	70	4.4mm	4.0°	210.0 ft	100.0	4.76
Zeiss 20 X 60	Yes (Mechanical)	N/A	20X	60	3.0mm	2.9°	150.0 ft	50.0	3.66

FIBERSCOPE

	<u>PAGE</u>
SPECIFICATIONS.....	18-2
NOMENCLATURE.....	18-2
ACTIVATION/OPERATION	18-3
DEACTIVATION	18-3
FIBERSCOPE LIGHT PWRUP (30 min)	18-4
FIBERSCOPE LENS REPLACEMENT	18-6

FIBERSCOPE


FIBERSCOPE

SPECIFICATIONS

LIGHT PWR: Orbiter – 6V via IFM Breakout Box

NOMENCLATURE

Lens Tip Adapter (FOV in deg)
10D
20D
40D
40S (Rt angle Lens)
80D

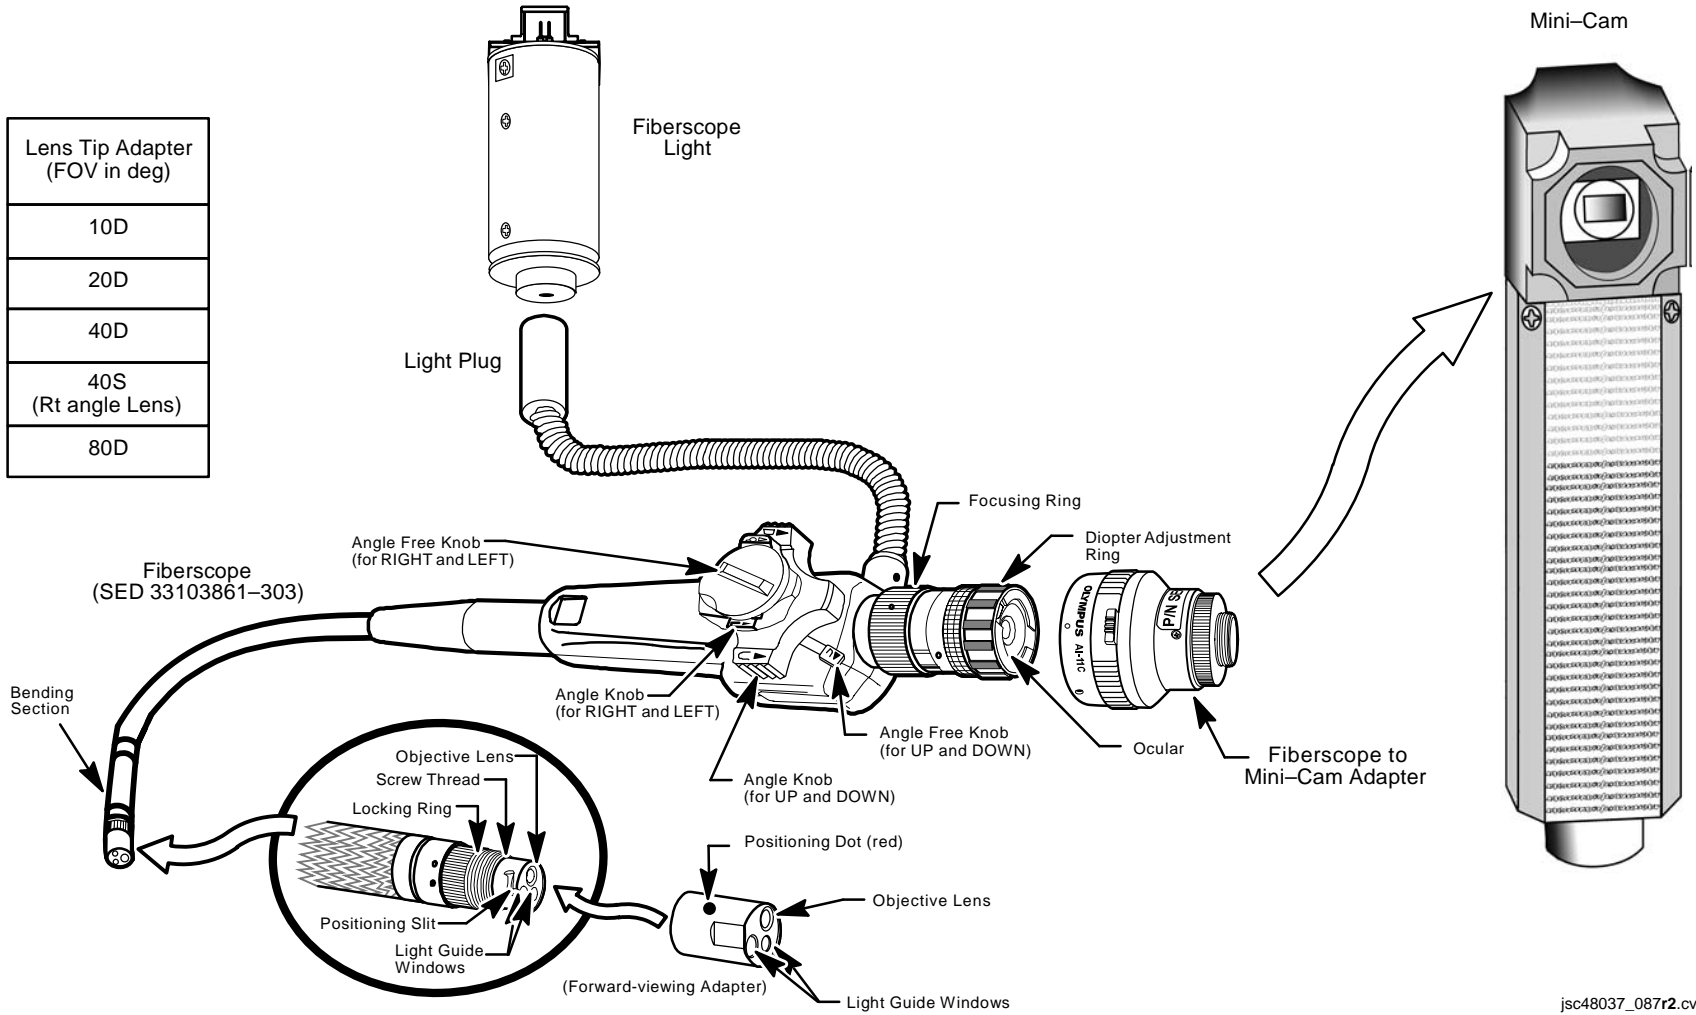

jsc48037_087r2.cvx

FIBERSCOPE (Continued)

ACTIVATION/OPERATION

- MA9N
1. Unstow Fiberscope Kit, Fiberscope Light, if reqd
 2. If Fiberscope Light reqd:
Install Fiberscope Light Plug into Fiberscope Light
Perform FIBERSCOPE LIGHT PWRUP, 18-4, steps 1 thru 12
 3. If installed lens not desired:
Unstow spare lens
Perform FIBERSCOPE LENS REPLACEMENT, 18-6
 4. If video dnlk(viewing) reqd:
Unstow Fiberscope-to-Mini-Cam Adapter
Screw Adapter into Mini-Cam body lens mount
Mount Adapter to Fiberscope by aligning setter pin w/orange dot, rotate Adapter cw to lock
Perform IN-CABIN MINI-CAM (MINI-CAM)
Route Mini-Cam video to monitor or dnlk:
A7 VID OUT MON 1(2) (DNLK) pb – push
IN FLT DECK(MIDDECK) pb – push
Push button on Adapter and rotate Fiberscope until slit mark on image edge at top of image
OR
Unstow,install Fiberscope Eyepiece
 5. Adjust diopter until slit mark clearly visible
Adjust Camr viewing by rotating up/down,left/right angle knobs while free knobs are in F posn
Adjust focus by rotating focus ring


DEACTIVATION

1. If Fiberscope Light used:
Perform FIBERSCOPE LIGHT PWRUP, 18-4, steps 13 thru 15
Remove Fiberscope Light from Fiberscope Light Plug
Stow Fiberscope Light
2. If Mini-Cam used:
O19(MO58F) TV PWR – OFF
Remove Mini-Cam Adapter from Fiberscope
Remove,store Mini-Cam Adapter from Mini-Cam body
3. Remove,store Fiberscope Eyepiece
4. Stow Fiberscope, Fiberscope Kit

FIBERSCOPE (Continued)

FIBERSCOPE LIGHT PWRUP (30 min)

1. Unstow:
 - Multimeter
 - Pin Kit (two 5-in 20 ga Pin/Pin Test Jumper Leads, two 24-in Minigrabbers, 5-Amp Fuse)
 - Gray Tape
 - IFM Breakout Box
 - DC Pwr Cable
- MA9N 2. Remove Battery Holder Assembly from Fiberscope Light
- MO52J 3. √DC UTIL PWR MNA – OFF
 4. a. Config Breakout Box:
 - AUX – OFF
 - 28V/VAR VOLT – VAR VOLTS
 - PWR A,B – OFF
 - b. Remove fuse cap from side A
 - c. Rotate GA SEL A – 20
 - d. Install 5-Amp Fuse, replace cap
5. Assemble Breakout Box and Multimeter as shown below

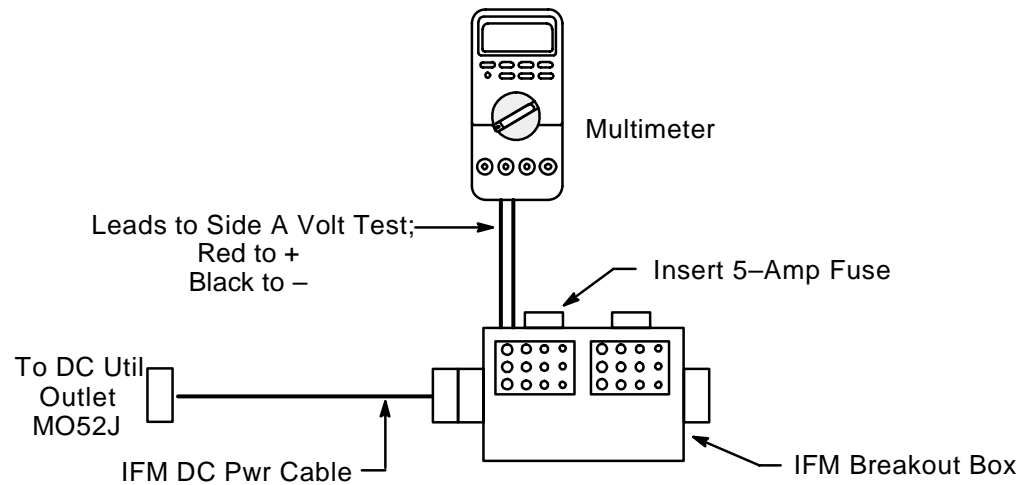

jsc48037_088.cnv

FIBERSCOPE (Continued)


FIBERSCOPE LIGHT PWRUP (30 min) (Continued)

6. Configure Multimeter for DC V (auto range)
- MO52J 7. DC UTIL PWR MNA – ON
8. Breakout Box:
√VAR VOLTS – ON (It on)
9. Set VAR VOLTS output by rotating VAR rotary sw until Multimeter reads 6 VDC

NOTE

Positive, negative leads from Breakout Box can be attached to either terminal on Fiberscope Light

10. Install Breakout Box and cables to Fiberscope Light as shown below

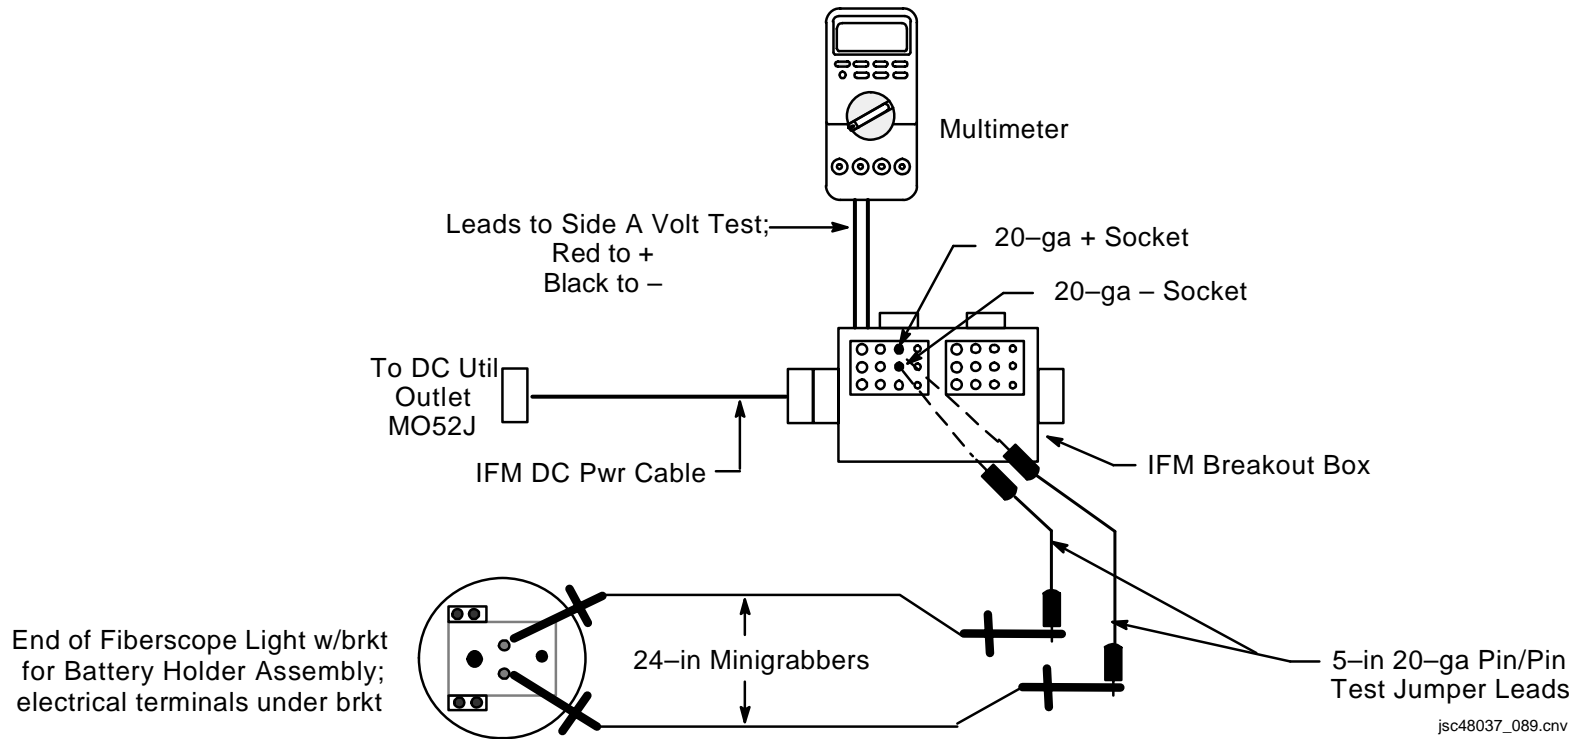

FIBERSCOPE (Concluded)

FIBERSCOPE LIGHT PWRUP (30 min) (Concluded)

11. Secure IFM Breakout Box, Multimeter, and PWR Cable in convenient location
12. When ready to operate Fiberscope:
Breakout Box: PWR A – ON (It on)
13. When finished operating Fiberscope:
Breakout Box: PWR A – OFF
- MO52J 14. DC UTIL PWR MNA – OFF
15. √Disconnect Minigrabbers, Test Jumper Leads, Multimeter, and IFM DC Pwr Cable

FIBERSCOPE LENS REPLACEMENT

1. Unscrew lock ring from lens until second threads disengage
2. Rotate lens to align green dots
3. Pull lens to engage first threads, unscrew lock ring until lens free
4. Select desired lens and stow removed lens in foam
5. Align green dots on lens and Fiberscope; slowly push lens on until lens stops against first threads; screw on lens until first threads disengage
6. Rotate lens until green dot aligns w/Fiberscope red dot
7. Push lens into Fiberscope until it stops against second threads, screw on lens until second threads fully engaged

LASER DYNAMIC RANGE IMAGER (LDRI)

	<u>PAGE</u>
SPECIFICATIONS.....	19-2
NOMENCLATURE.....	19-3
OBSS PTU PAN AND TILT RANGES.....	19-5
FUNCTIONAL FLOW.....	19-6
ITVC, LDRI, AND PTU INTERACTIONS.....	19-7
OPP PANEL.....	19-8
OBSS PANEL.....	19-9
A7 PANEL.....	19-10
MONITOR INDICATIONS FOR LDRI VIDEO.....	19-11

LASER DYNAMIC RANGE IMAGER (LDRI)

SPECIFICATIONS

CAMERA MODEL: Sony XC-ST70
PIXEL COUNT: 720 x 480
CAMERA SENSOR FOV: 15 x 19.7 deg
FOCAL LENGTH: 50.6mm
IRIS: Fixed at F11
FOCUS: Fixed at 6 ft

LASER MODEL & TYPE: LaserTeILT-1110-20W-CS, Class IV rated @ 20W and limited to 11W
LASER WAVELENGTH: 805 nm +/- TBD based upon laser temperature
LASER COVERAGE: 23.7 (vertical) x 19.9 deg (horizontal)
CAMERA/LASER PARALLAX: Approx 1.5 in horizontal
HAZARD ZONE: 9 ft

MOUNTING INTERFACE: Bottom of ITVC (ITVC specifications in CCTV section)
POINTING CAPABILITY: Standard Pan Tilt Unit (PTU)
PAN RANGE: 179.8 deg
TILT RANGE: 300 deg
ITVC ILLUMINATOR: LDRI


WEIGHT: 6.5 lb + 3 lb counter-weight
DIMENSION: 11 in (L) x 5.88 in (W) x 4.0 in (H)
PWR: 28V +/- 4V

LASER DYNAMIC RANGE IMAGER (LDRI) (Continued)

NOMENCLATURE

NOTE

Thermal covers are not depicted

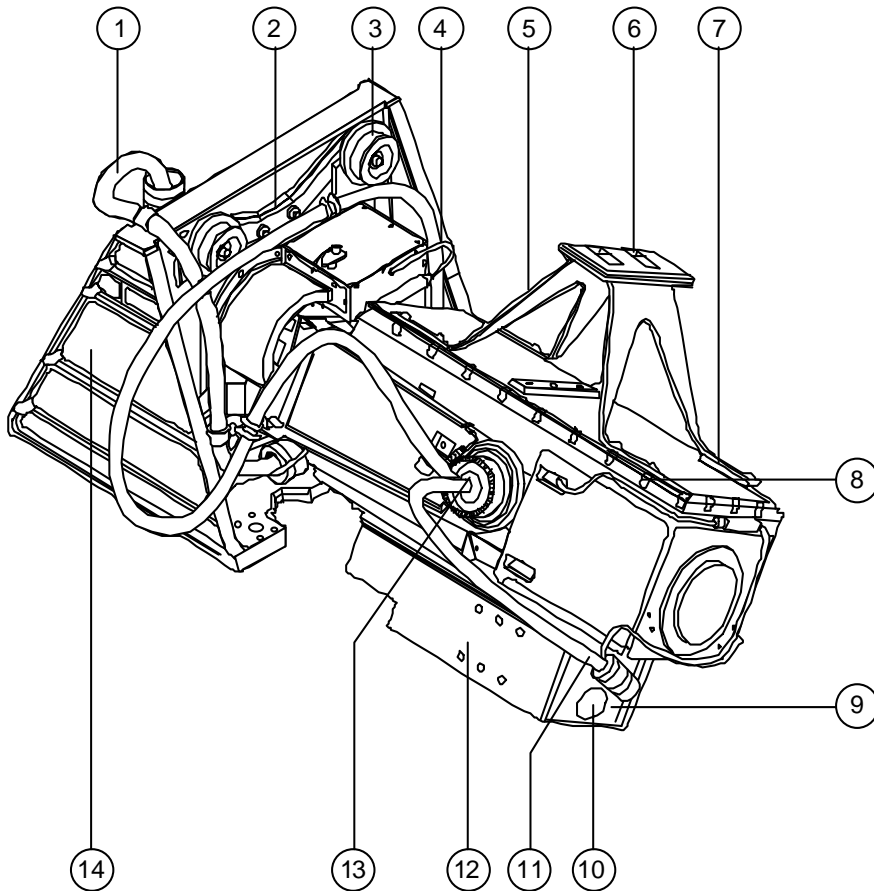


- ① W601 Interface Cable Assembly (EVA releasable at boom I/F)
- ② Isolator Plate
- ③ Isolator (x4)
- ④ PTU External Thermistor Interface Cable*
- ⑤ Counterweight Support
- ⑥ Counterweight
- ⑦ ITVC
- ⑧ ITCV External Thermistor Interface Cable*
- ⑨ LDRI Laser Diffuser
- ⑩ LDRI Camera Orifice
- ⑪ LDRI Power/Sync Input and Video Output
- ⑫ LDRI
- ⑬ ITVC Power/Sync Input and Video Output
- ⑭ Boom Interface Bracket (EVA Releasable)

* Items 4 and 8 are subsets of item 1, the W601 Interface Cable Assembly

jsc48037_117r2.cvx

LASER DYNAMIC RANGE IMAGER (LDRI) (Continued)

NOMENCLATURE (Concluded)

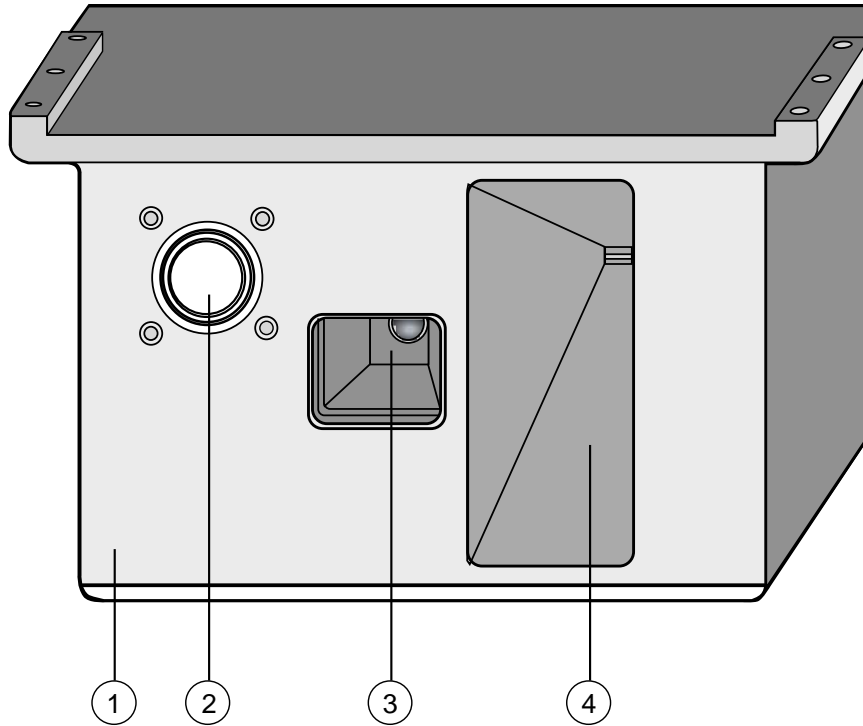


- ① LDRI Front Face
- ② Power/Sync Input and Video Output
- ③ Camera Orifice
- ④ Laser Orifice (covered by diffuser)

jsc48037_118r3.cvx

LASER DYNAMIC RANGE IMAGER (LDRI) (Continued)


OBSS PTU PAN AND TILT RANGES

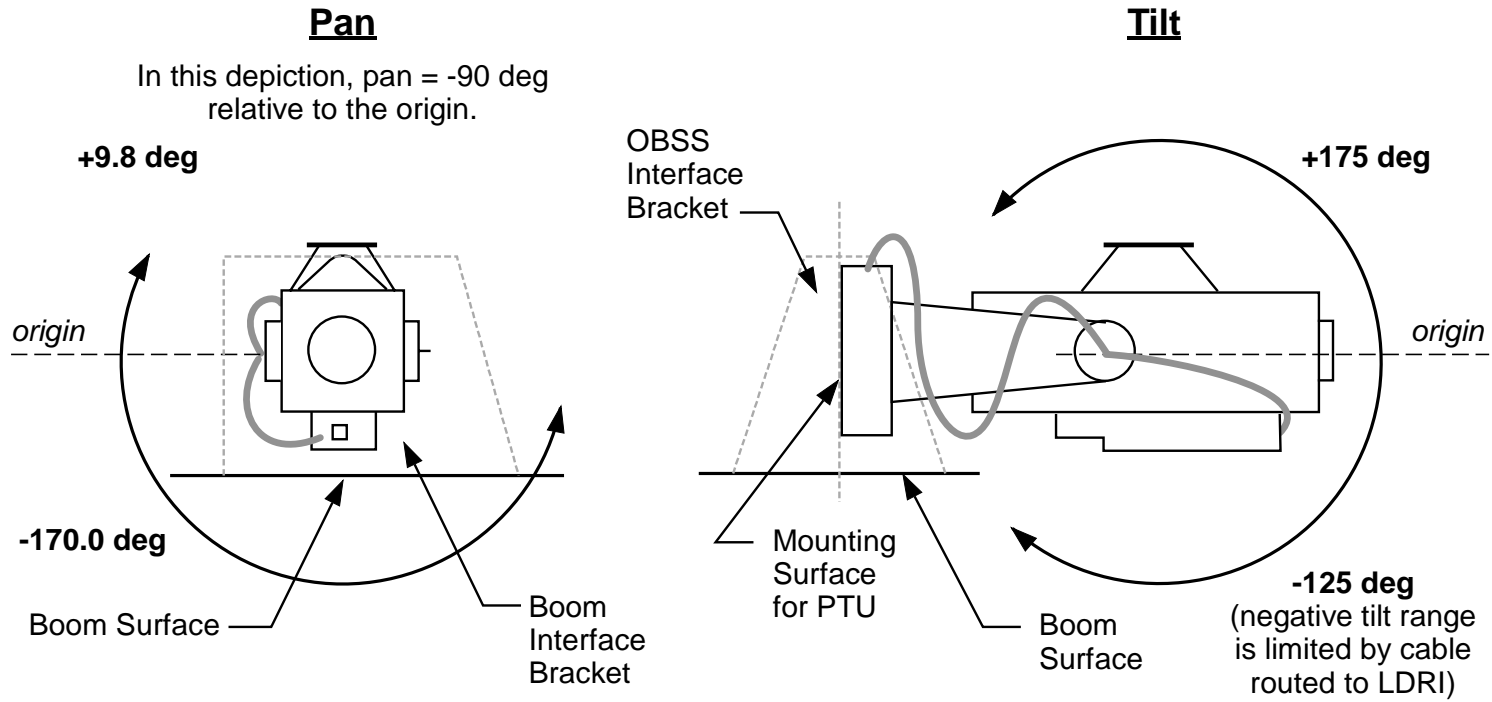

jsc48037_119r2.cvx

LASER DYNAMIC RANGE IMAGER (LDRI) (Continued)


FUNCTIONAL FLOW

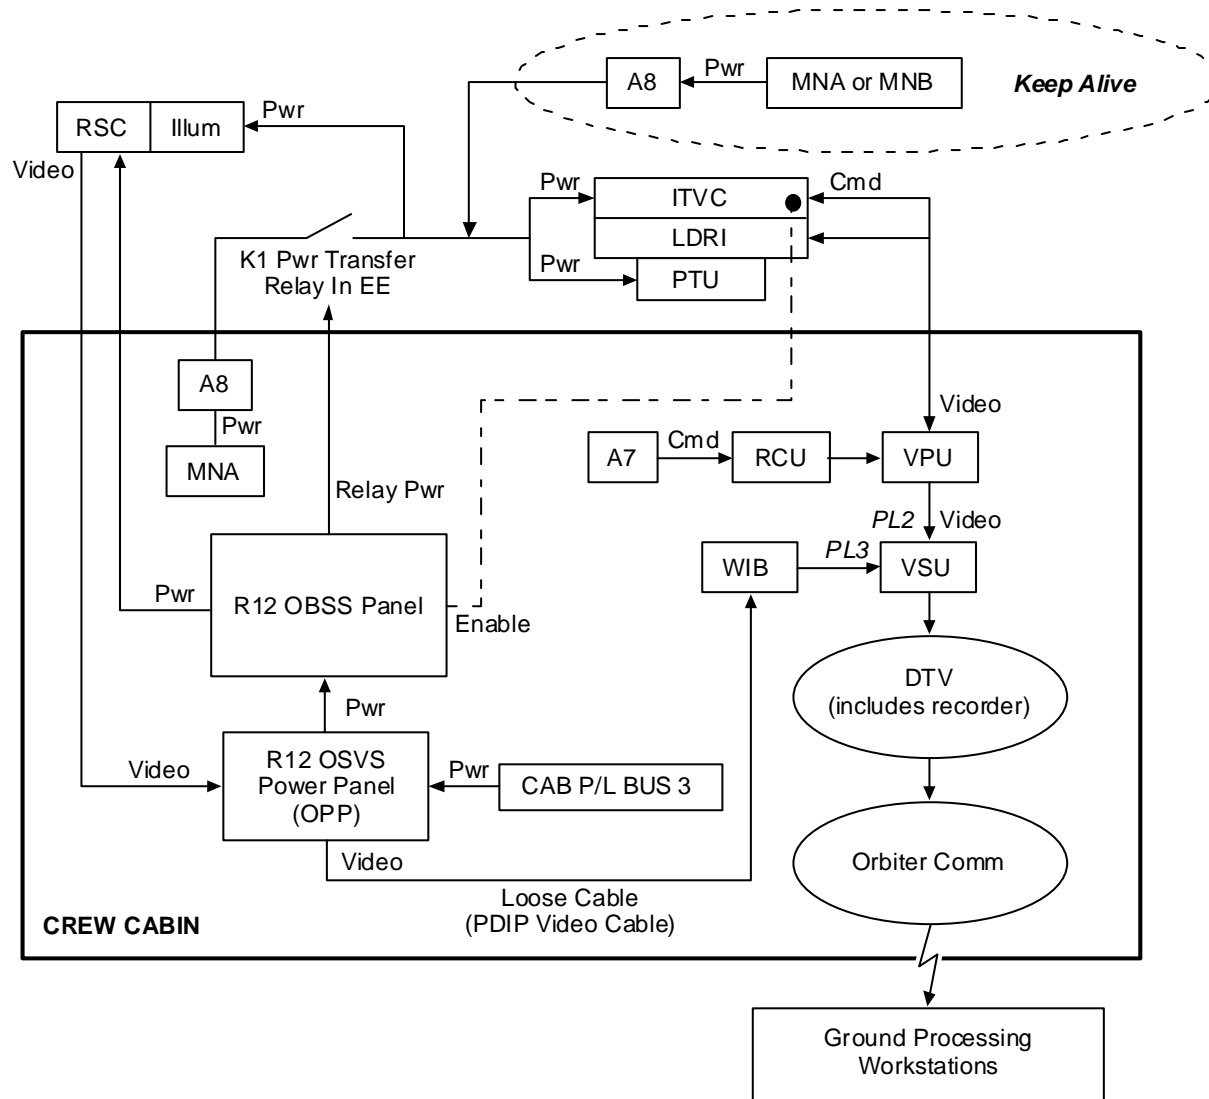

jsc48037_120r2.cwx

LASER DYNAMIC RANGE IMAGER (LDRI) (Continued)

ITVC, LDRI, AND PTU INTERACTIONS

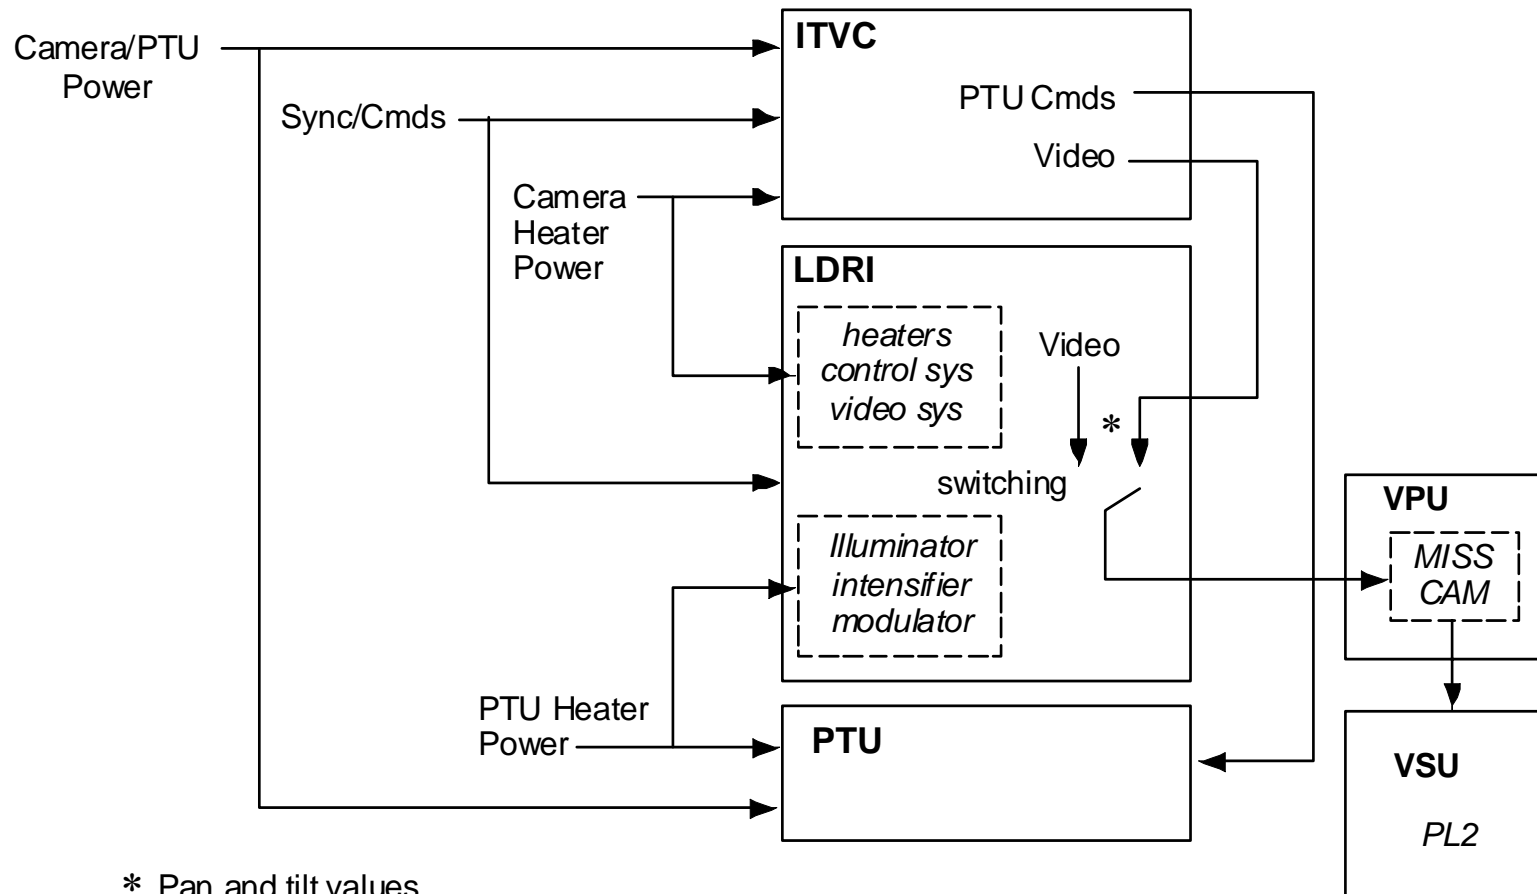


* Pan and tilt values for display on MON

jsc48037_121r2.cvx

LASER DYNAMIC RANGE IMAGER (LDRI) (Continued)

OPP PANEL

R12

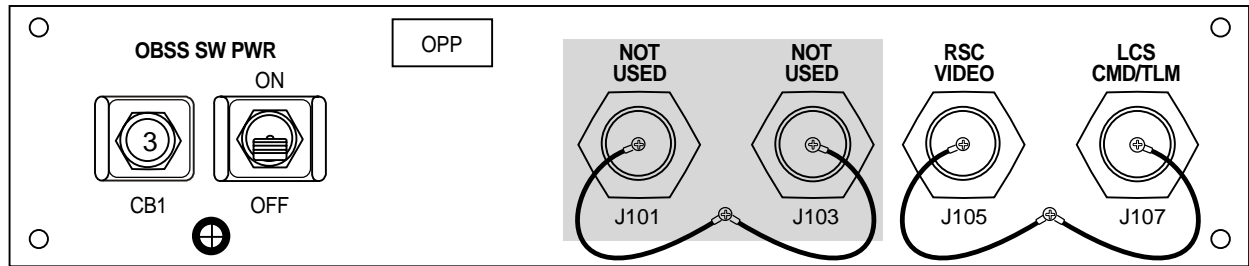

jsc48037_123r1.cvx

OBSS SW PWR (CB1 AND S1)

- Closure of 3-amp OBSS SW PWR cb followed by sw will provide CAB PL3 POWER to R12 OBSS panel

RSC VIDEO (J105)

- Provides balanced, asynchronous video from RMS Sideview Camr (RSC)
- Video will be routed to VSU PL3 input on R12/VPU/WIB using PDIP Video Cable to support viewing/recording/dnlk ops


LCS CMD/TLM (J107)

- Provides PGSC interface for crew control, data, and telemetry for Laser Camr System (LCS) and ISIS Digital Camr (IDC)

LASER DYNAMIC RANGE IMAGER (LDRI) (Continued)

OBSS PANEL

R12

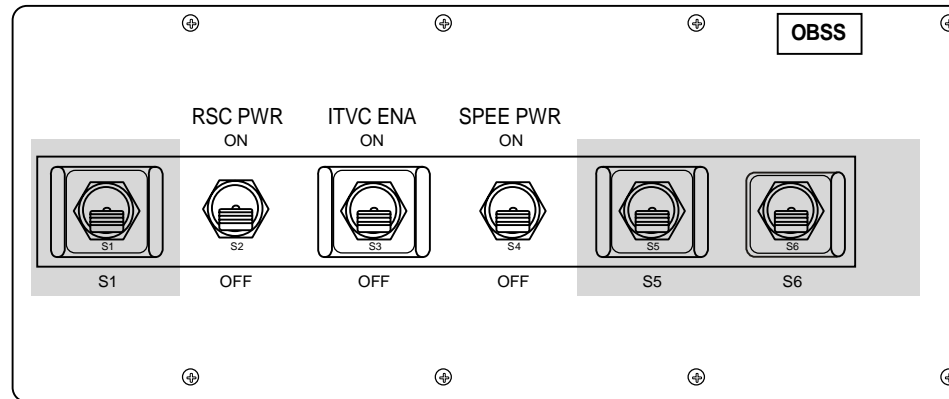

jsc48037_124r2.cvx

RSC PWR (S2)

- Provides CABIN PL3 POWER to RMS Sideview Camr (RSC) and its heater
- Heater must remain active for duration of mission

ITVC ENA (S3)

- ON sends an enable command to the OBSS ITVC
- SPEE PWR must be ON prior to ITVC enable
- OFF disables Camr. A 10-sec wait reqd before re-enabling


SPEE PWR (S4)

- ON closes K1 pwr relay in RMS End Effector. Pwr flows to OBSS ITVC/LDRI/PTU and to RSC illuminator. Upon initial relay closure, illuminator has pwr but not active
- After initial closure of K1 relay, cycling SPEE PWR sw to OFF, then ON will command RSC illuminator to full pwr (156 LEDs). Subsequent K1 relay cycling will take illuminator to med pwr (84 LEDs), then low pwr (30 LEDs), then OFF, and then back to full pwr
- Cycling K1 relay OFF, then ON will rest OBSS PTU pan and tilt values to zero; take LDRI to stby (Mode 1) and ITVC to manual state

LASER DYNAMIC RANGE IMAGER (LDRI) (Continued)

A7 PANEL

A7

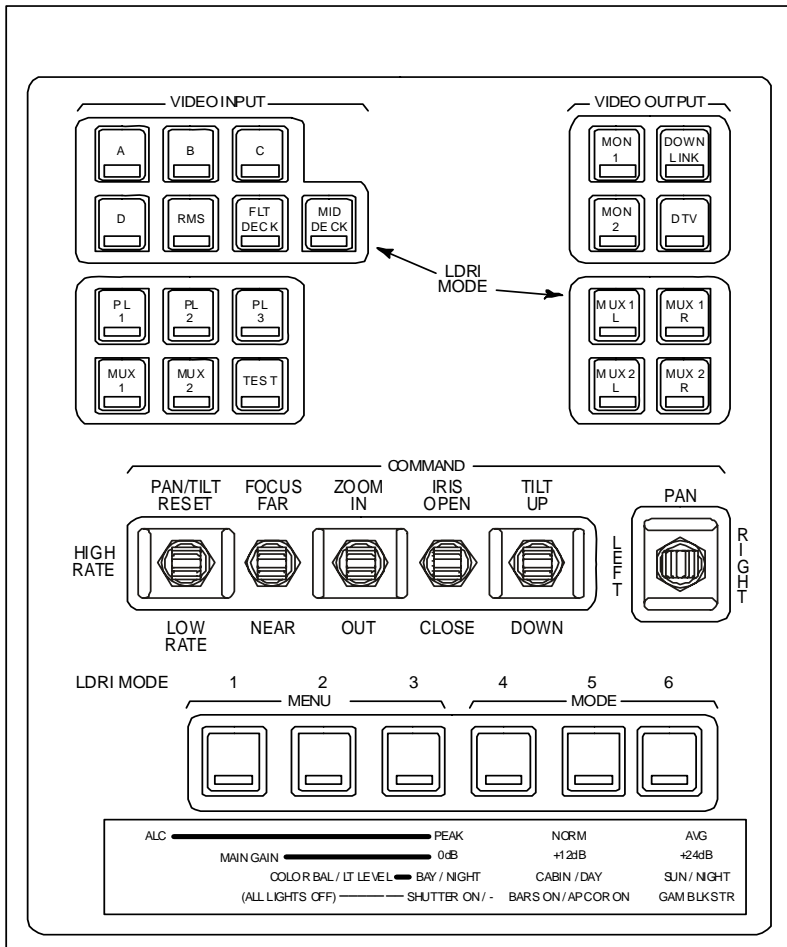

jsc 48037_125r3.cvx

NOTE

Command interfaces listed below pertain only to OBSS LDRI and not to OBSS ITVC/PTU. Commands to ITVC/PTU handled by selecting PL2 as video input and treating that address in same manner as PLB ITVC

MUX1(2)R(L),MIDDECK pb

- Selection of any of four VIDEO OUTPUT MUX pb followed by VID IN MIDDECK pb enables commanding of OBSS LDRI

IRIS sw

- IRIS sw provides gain cntl for LDRI Modes 3,4,5,6. Feedback is available in MON Lens Data in place of T-stop
- Gain range – 10 (brightest) to 280 (darkest). Default value – 280
- Gain applied on one of Modes 3(4,5,6) will apply to other three. Gain returns to default value by selecting Mode 1

MODE, MENU pb


- Six MODE/MENU pb, left to right, allow selection of LDRI modes 1 thru 6:
 - MODE 1 – STANDBY
 - MODE 2 – ILLUMINATOR
 - MODE 3 – 2D
 - MODE 4 – 2D GAMMA
 - MODE 5 – 3D
 - MODE 6 – 3D GAMMA
- If OBSS/ITVC cntl selected (by depressing VID OUT pb selected for PL2) while in LDRI modes 3(4,5,6), LDRI video will continue to flow to VID OUT. For this scenario, all ITVC cmds active in blind
- Mode fdbk for Modes 3,4,5,6 avail when PL2 illuminated. In Modes 1 and 2, MODE/MENU pb indicate ITVC exposure setting, not mode

LASER DYNAMIC RANGE IMAGER (LDRI) (Concluded)

MONITOR INDICATIONS FOR LDRI VIDEO

NOTE

LDRI video assigned to PL2 using R12/VPU MISS CAM jumper posn. LDRI video (Modes 3-6) will have black rounded corners. Lens data and green Camr data ON for this illustration

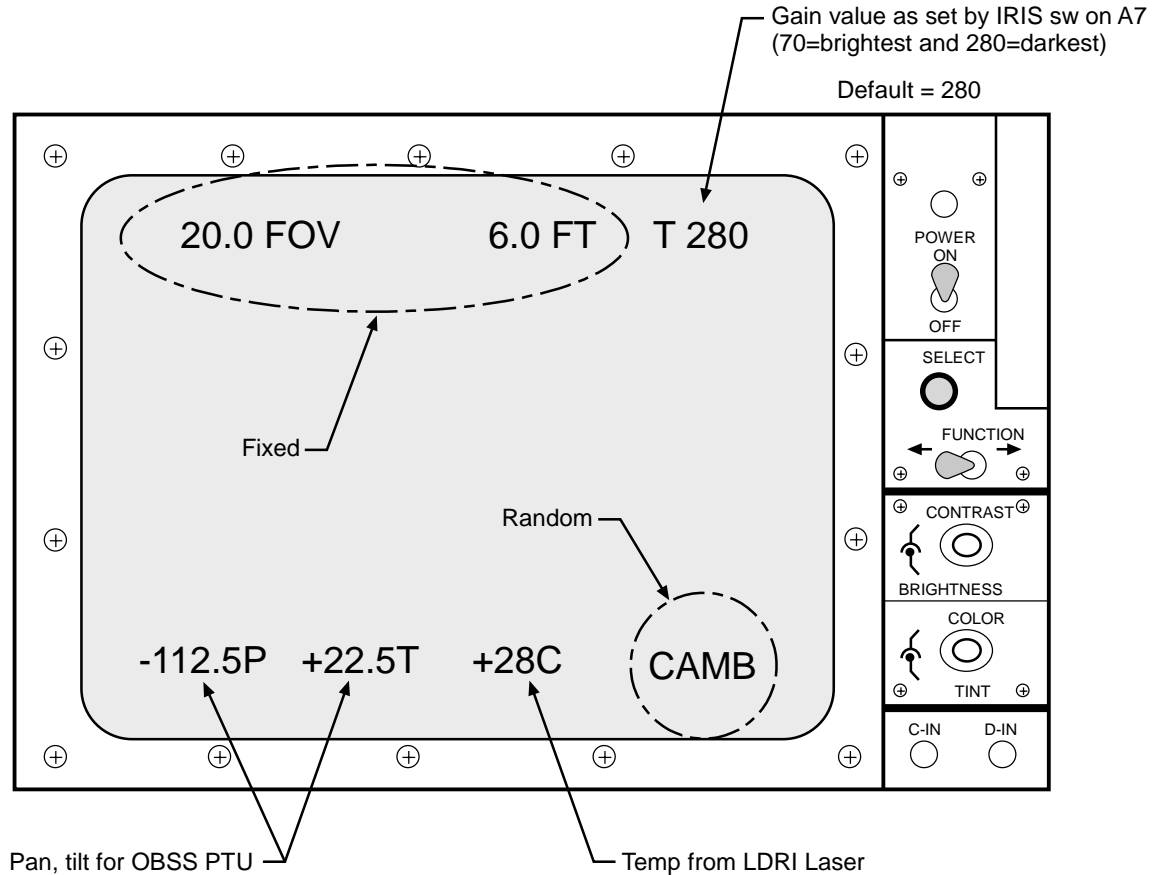

This Page Intentionally Blank

LASER CAMR SYSTEM (LCS)/INTEGRATED SENSOR INSPECTION SYSTEM DIGITAL CAMR (IDC)

I

LCS SPECIFICATIONS.....	20-2
LCS NOMENCLATURE.....	20-3
LCC SOFTWARE GUI.....	20-4
IDC SPECIFICATIONS.....	20-8
IDC NOMENCLATURE	20-9
IDC SOFTWARE GUI.....	20-10
LCS/IDC COMBINED NOMENCLATURE	20-14
LCS/IDC KEEP ALIVE PWR AND DATA INTERFACES (Berthed on MPMs)	20-15
LCC SOFTWARE EXIT DIALOGUE BOXES	20-16
MANUAL A31p DESKTOP DNLK SETUP.....	20-17
RECONFIGURATION OF A31p SCREEN RESOLUTION.....	20-20

LASER CAMR SYSTEM (LCS)/INTEGRATED SENSOR INSPECTION SYSTEM DIGITAL CAMR (IDC)

LCS SPECIFICATIONS

LASER WAVELENGTH: ≈1500 nm, near-IR

LASER CLASSIFICATION: Class 3b

OPERATIONAL RANGE: 4-10 ft

LASER SPOT SIZE: 0.04 in @ 4.5 ft

HAZARD ZONE:

Nominal Hazard Keep Out Zone (KOZ) – 5 ft

Worst Case Hazard KOZ – 64 ft

LASER COVERAGE:

Detailed Area and Quick View Scan Modes – 30 x 30 deg

Continuous Line Scan Mode – Variable 2 to 42 deg

LINEAR DETECTION ARRAY (LDA): 256-pixel linear array CCD w/13-bit intensity dynamic range

LCH WEIGHT: 24.5 lb

LCH DIMENSIONS: 11 in (L), 10 in (W), 5.6 in (H)

LCH PWR MODES/SOURCES: Refer to LASER CAMR SYSTEM (LCS)/INTEGRATED SENSOR INSPECTION SYSTEM DIGITAL CAMR (IDC) (PHOTO/TV FS, REF PROC)

HEATER PWR MODES/SOURCES: Refer to LASER CAMR SYSTEM (LCS)/INTEGRATED SENSOR INSPECTION SYSTEM DIGITAL CAMR (IDC) (PHOTO/TV FS, REF PROC)

LASER SCAN MODES:

Detailed Area – Two-directional scanning in rectangular pattern (used for "stop and stare" ops). Both X,Y mirrors used

Quick View – Low-resolution detailed area-scan mode

Continuous Line – One-directional scanning passes thru optical center of FOV (used for scanning ops). RMS provides scanning motion



CREW CONTROL:

Hardware – LCC (Laser Camr Controller – A31p)

Software – LCC software shortcut (Shuttle Apps\IDC)

LASER CAMR SYSTEM (LCS)/INTEGRATED SENSOR INSPECTION SYSTEM DIGITAL CAMR (IDC) (Continued)

LCS NOMENCLATURE

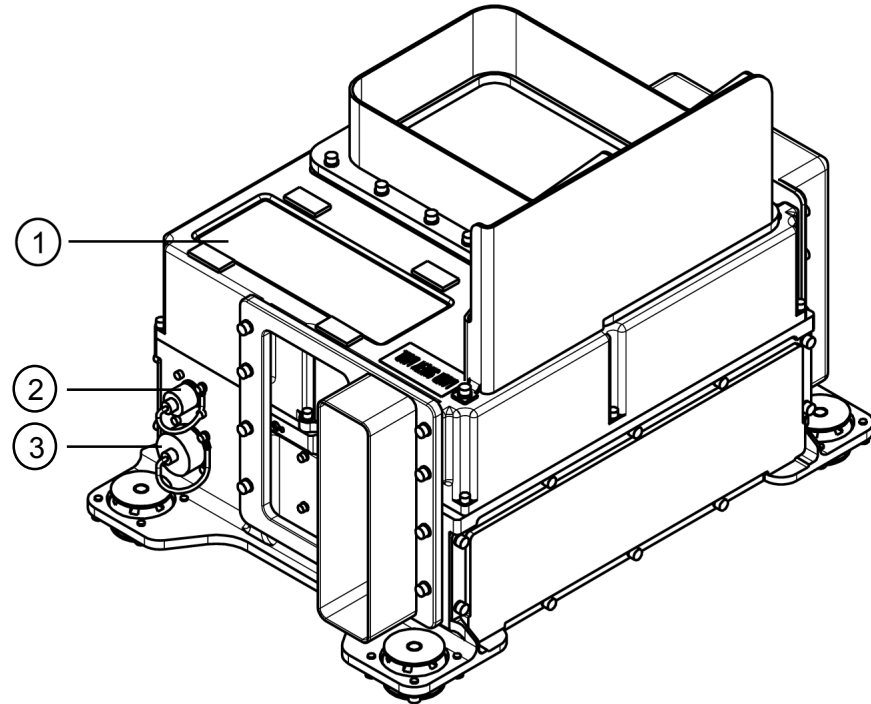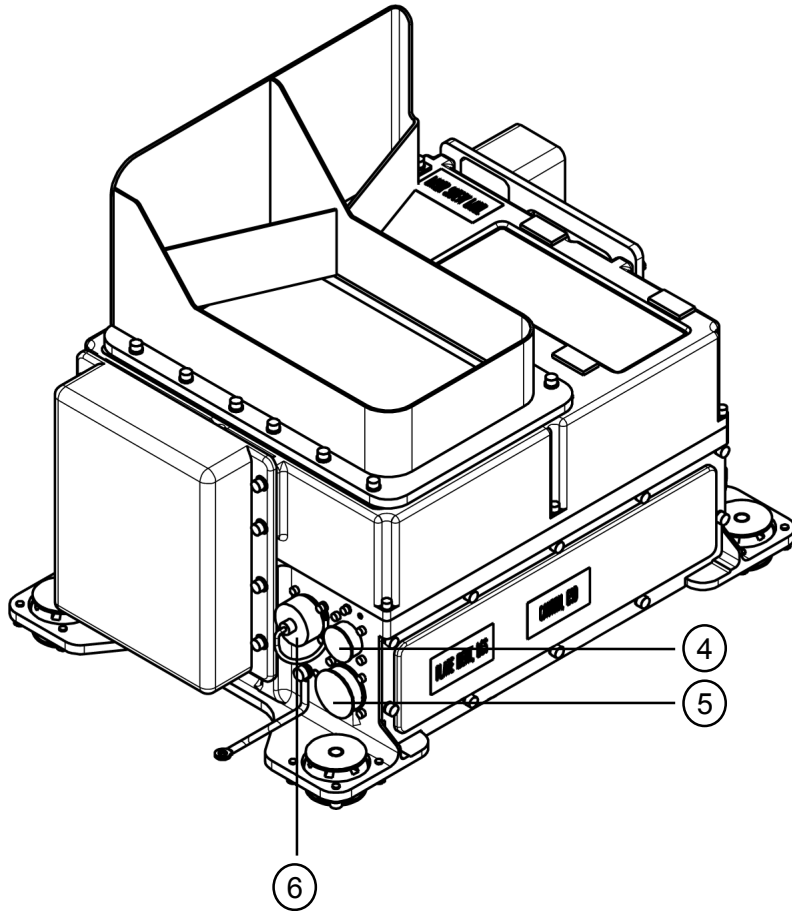


- ① Laser Orifice
- ② RS422 Connector (J4)
- ③ Test Connector (J3)
- ④ COMMS/DATA Connector (J2)
- ⑤ POWER Connector (J1)
- ⑥ Ethernet Peripheral Device Connector (J5)

jsc48037_177r1.cvx

LASER CAMR SYSTEM (LCS)/INTEGRATED SENSOR INSPECTION SYSTEM DIGITAL CAMR (IDC) (Continued)

LCC SOFTWARE GUI

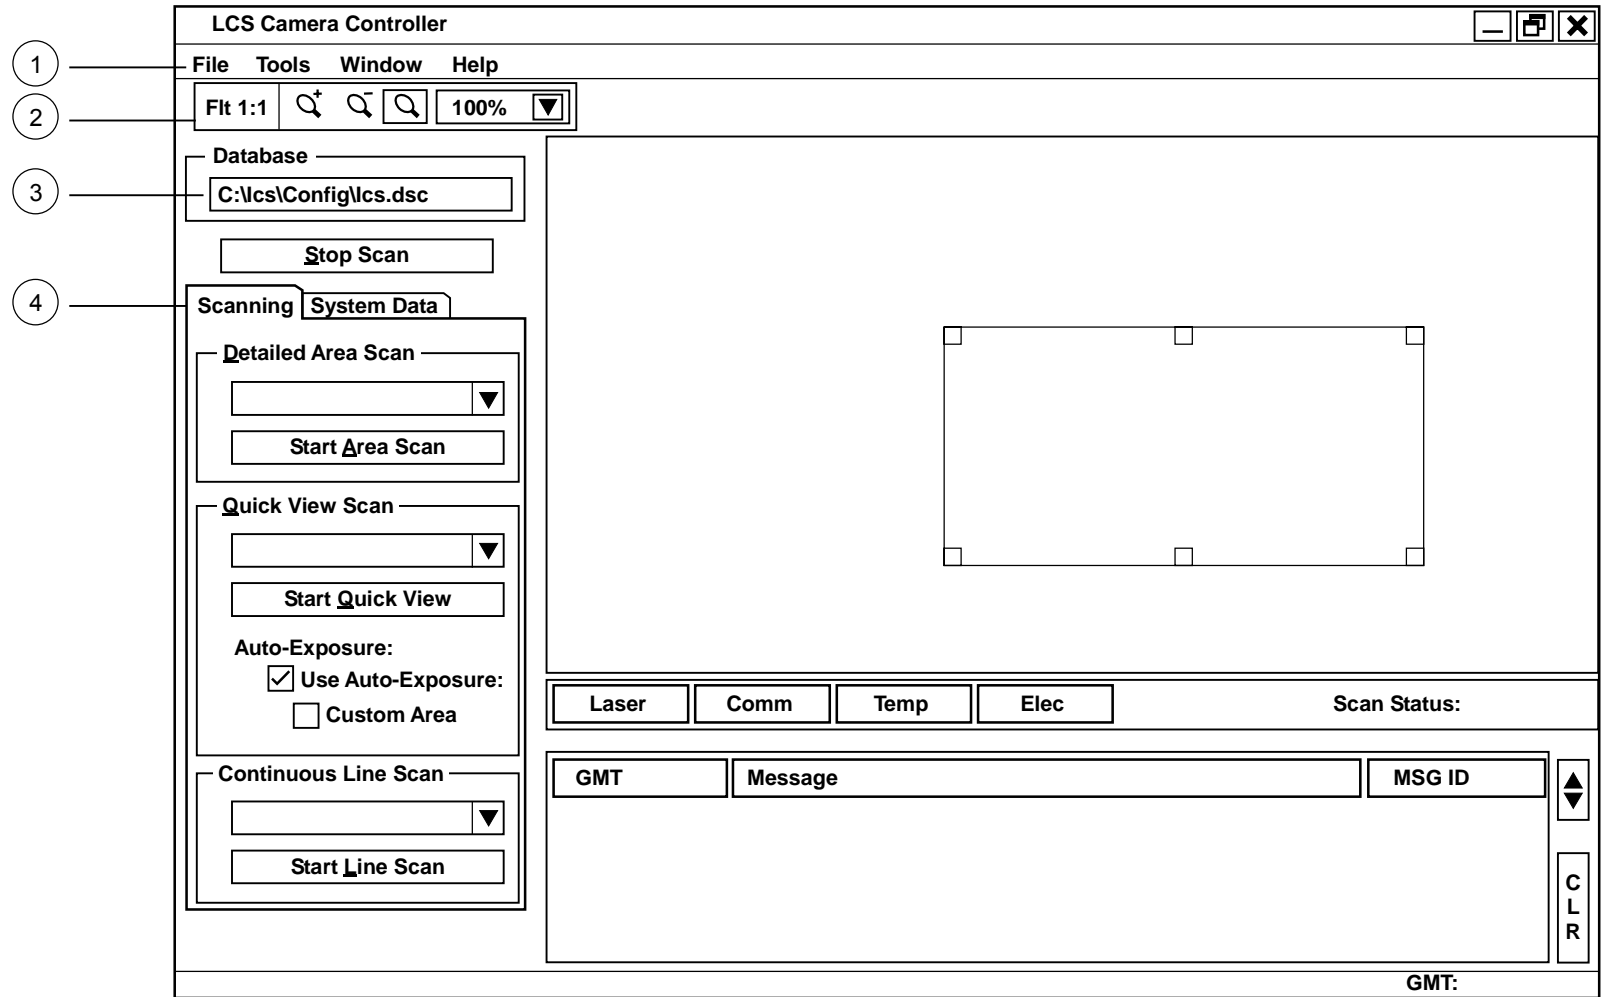

jsc48037_178r1.cvx


LASER CAMR SYSTEM (LCS)/INTEGRATED SENSOR INSPECTION SYSTEM DIGITAL CAMR (IDC) (Continued)

LCC SOFTWARE GUI (Continued)

1	Menu Bar [File, Tools, Help]			
	[File]	Open	Allows user to open and view previous scan bin files. If several open, they are shown in order under File menu	
		Close	Closes displayed scan bin file. Appears only when viewing previous scans. If several open, only currently selected file will be closed with this function	
		Close All	Closes all scan bin files. Appears only when viewing previous scans. If several open, all files will be closed. Multiple scans collected in series will reside in RAM until cleared with this feature. Good housekeeping feature to use between scan AOs	
		Load Database	Allows user to change current database. When load database option selected, a window will appear and allow user to select another database. Only files w/.dsc extension selectable	
		Exit	See LCC SOFTWARE EXIT DIALOGUE BOXES, 21-16	
	[Tools]	Set GMT	Sets GMT clock on both LCC,LCH. When selected, window will appear allowing A31p time to be set. LCC time must be within 3 sec of onboard SM GPC. Once clock set, LCC A31p will update its system clock every 5 min using LCH system clock if LCC GUI running	
		IDC Control	Not used. Allows user to pwr on(off) IDC. This task preferably done via IDC software	
		Zoom Toolbar	Allows Zoom Toolbar to be displayed under Menu Bar	
		Intensity Adjustments	Not currently selected(used). Invokes Intensity Adjustment window on GUI so user can adjust Gamma, Brightness, and Contrast of displayed scan image	
		Peak Status Highlight	Not currently selected(used). Invokes Peak Status window so user to select voxel status: Below Min Intensity, Above Max Intensity, Overflow, Underflow, Invalid Peak, No Peak, and Multiple Highlights	
	[Window] (Menu appears only when scan bin files being viewed)	Status Toobar	Allows Status Toolbar to be displayed below GUI. Contains only GMT	
		Cascade	Cascades all currently opened scan bin files	
		Tile Vertically	Will 'vertically tile' all opened scan bin files. User can scroll up,down with vertical,horizontal slide bars	
		Tile Horizontally	Will 'horizontally tile' all opened scan bin files. User can scroll up with vertical slide bar	
[Help]	Arrange Icons	If multiple windows open and minimized in display area, will align minimized files		
	About	Displays window w/software-specific information; i.e., version of release		
2	Zoom Toolbar			
	Fit 1:1	If displayed scan bin file has been zoomed in(out), button allows user to fit image to display area		
	Magnifier w/+ Sign	Zoom in button		
	Magnifier w/- Sign	Zoom out button		
	Magnifier in box	Allows user to select a box on display to zoom in on. Mouse arrow will change to magnifier. User will outline area w/two mouse clicks and view is fitted in display area		
Zoom Percentage Menu	Allows user to zoom in(out) according percentage displayed. Selectable percentages: 25%, 50%, 75%, 100%, 150%, 200%, 300%, 400%, Fit to Window			
3	Database	Displays current database and its path. Default is "c:\lcs\config\lcs.doc"		
	File	Displays name of current file being saved on LCC hard drive during scan. Will display last scan file name when no scan in progress		
4	Scanning Page [Detailed Area Scan, Continuous Line Scan, Quick View Scan] (One of two pages which allows user to select scan from one of three drop-down menus and execute each type of scan)			
	[Detailed Area Scan]	Detailed Area Scan	Drop-down menu allows user to select one out of a possible 30 detailed area scans	
		Start Area Scan	Executes detailed area scan selected from drop-down menu	
	[Quick View Scan]	Detailed Area Scan	Drop-down menu allows user to select one out of a possible 10 quick-view scans	
		Start Quick View	Executes quick-view scan selected from drop-down menu	
	[Auto-Exposure]	Use Auto-Exposure	Enables Auto-Exposure. AE feature adds ~10 sec. Three initial scans taken and exposure calculated based on those scans	
		Custom Area	Enables Custom Area Box in image as reqd. Auto-exposure calculated from Custom Area Box	
	[Continuous Line Scan]	Detailed Area Scan	Drop-down menu allows user to select one out of a possible 30 continuous line scans	
Start Line Scan		Executes continuous line scan selected from drop-down menu		

LASER CAMR SYSTEM (LCS)/INTEGRATED SENSOR INSPECTION SYSTEM DIGITAL CAMR (IDC) (Continued)

LCC SOFTWARE GUI (Continued)

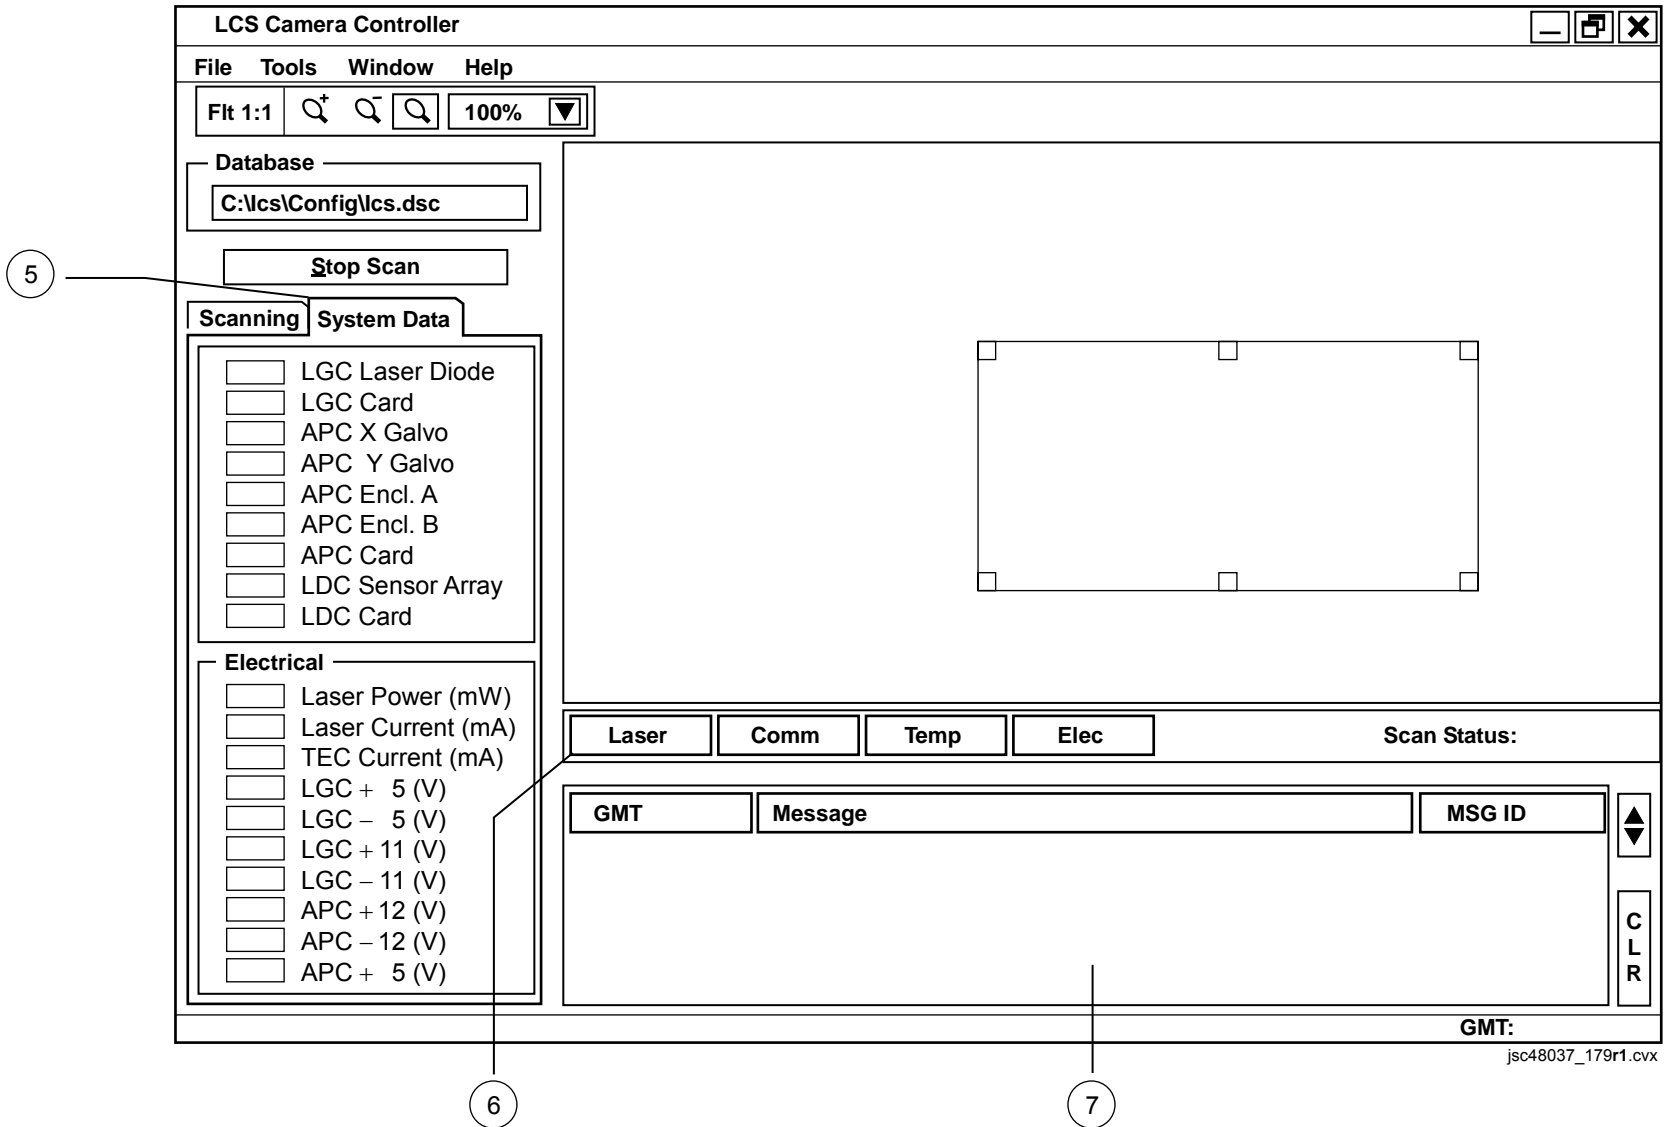

LASER CAMR SYSTEM (LCS)/INTEGRATED SENSOR INSPECTION SYSTEM DIGITAL CAMR (IDC) (Continued)

LCC SOFTWARE GUI (Concluded)

5	System Data Page [Temperature (degC), Electrical] (One of two pages. Gives user insight into various temp,elec values of components inside LCH. Values are software FDA'd according to limits set in current database. An out of allowable limit value is backlit in yellow and causes a msg to be displayed)	
	[Temperature]	Displays LCH component temp values in deg Celsius
	[Electrical]	Displays LCH component elec values. Values are milliWatts, milliamps, and Volts
6	Laser On/Off [Laser On, Laser Off, Laser ?] (Displays on,off status of Laser diode)	
	Laser On (Green)	Scan in progress. Backlit in green while laser diode on
	Laser Off (Blue)	Scan not in progress. Backlit in blue while laser diode off
	Laser ? (Gray)	No insight into LCH. Backlit in gray when no LCH to LCC Ethernet connectivity
	Comm	Light displays Ethernet communication state between LCC,LCH Green Light – Indicates good Ethernet connection Yellow Light – Indicates bad Ethernet connection
	Temp	
	Temp (Green/Yellow)	Light displays temp status of LCH components Green Light – Backlit in green when all LCH component temp values within ranges specified by current database Yellow Light – Backlit in yellow when one or more values out of limits
	Elec	
	Elec (Green/Yellow)	Light displays elec status of LCH components Green Light – Backlit in green when all elec values within ranges specified by current database Yellow Light – Backlit in yellow when one or more values out of limits
	Scan Status (Blank, Complete, Vertical Resolution)	
Blank	When LCS software launched and no scans have been executed	
Complete	Displays last scan line collected or Stop Scan button selected	
Vertical Resolution	While scan in progress, field displays vertical resolution of scan and current line being scanned; i.e., 211/512 means current line being scanned and recorded on LCC is 211 and vertical resolution is 512	
7	Message Area	
	GMT	Displays GMT of time tagged off-nominal message
	Message	Displays text description of error messages. Any messages displayed here are logged into system log
	MSG ID	Display unique six-digit number that corresponds to error message that appears in message area
	CLR	Clears current error messages displayed in message area. Button will invoke a dialogue box asking user if he wants to clear message area
	GMT DDD/HH:MM:SS	Displays GMT based on A31p system clock. Once GMT set via Tools menu, LCC will sync up to time kept on LCH, which is accurate

LASER CAMR SYSTEM (LCS)/INTEGRATED SENSOR INSPECTION SYSTEM DIGITAL CAMR (IDC) (Continued)

IDC SPECIFICATIONS

IDC DIMENSIONS: 6 in (L), 5 in (W), 2 in (D)

IDC ELECTRONIC COMPONENTS: Adimec-2000m/S and Pleora i-port PT1000-CL

IDC ELECTRONIC PWR: 12V conditioned pwr from LCH

HEATER PWR MODES/SOURCES: Refer to LASER CAMR SYSTEM (LCS)/INTEGRATED SENSOR INSPECTION SYSTEM DIGITAL CAMR (IDC) (PHOTO/TV FS, REF PROC)

IMAGER MODEL: Adimec-2000m/S gray-scale imager

CCD: 1920 x 1080

CCD PIXEL SIZE: 7.4 microns (square pixels)

SPECTRAL RESPONSE:

350 nanometers (25%)

500 nanometers (42% Peak)

700 nanometers (20%)

FOCAL LENGTH: 50mm

DYNAMIC RANGE: 60dB

GAIN: 1X-8X

APERTURE: f/8

FOCUS DISTANCE: 6 ft 3 in

WORKING DISTANCE: 5 ft

Target Resolution at 5 ft: 113 pixels/in

Horizontal Coverage at 5 ft: 17 in

Vertical Coverage at 5 ft: 10 in

INTERFACE: 10Base2 half duplex

CREW CONTROL:

Hardware – LCC (Laser Camr Controller – A31p)


Software – LCC software shortcut (Shuttle Apps\IDC)

IMAGE FORMAT: 16-bit tif

LASER CAMR SYSTEM (LCS)/INTEGRATED SENSOR INSPECTION SYSTEM DIGITAL CAMR (IDC) (Continued)

IDC NOMENCLATURE


- ① DCA to LCH Cable Connector
- ② Digital Camr Assy (DCA)
- ③ Lens Attachment

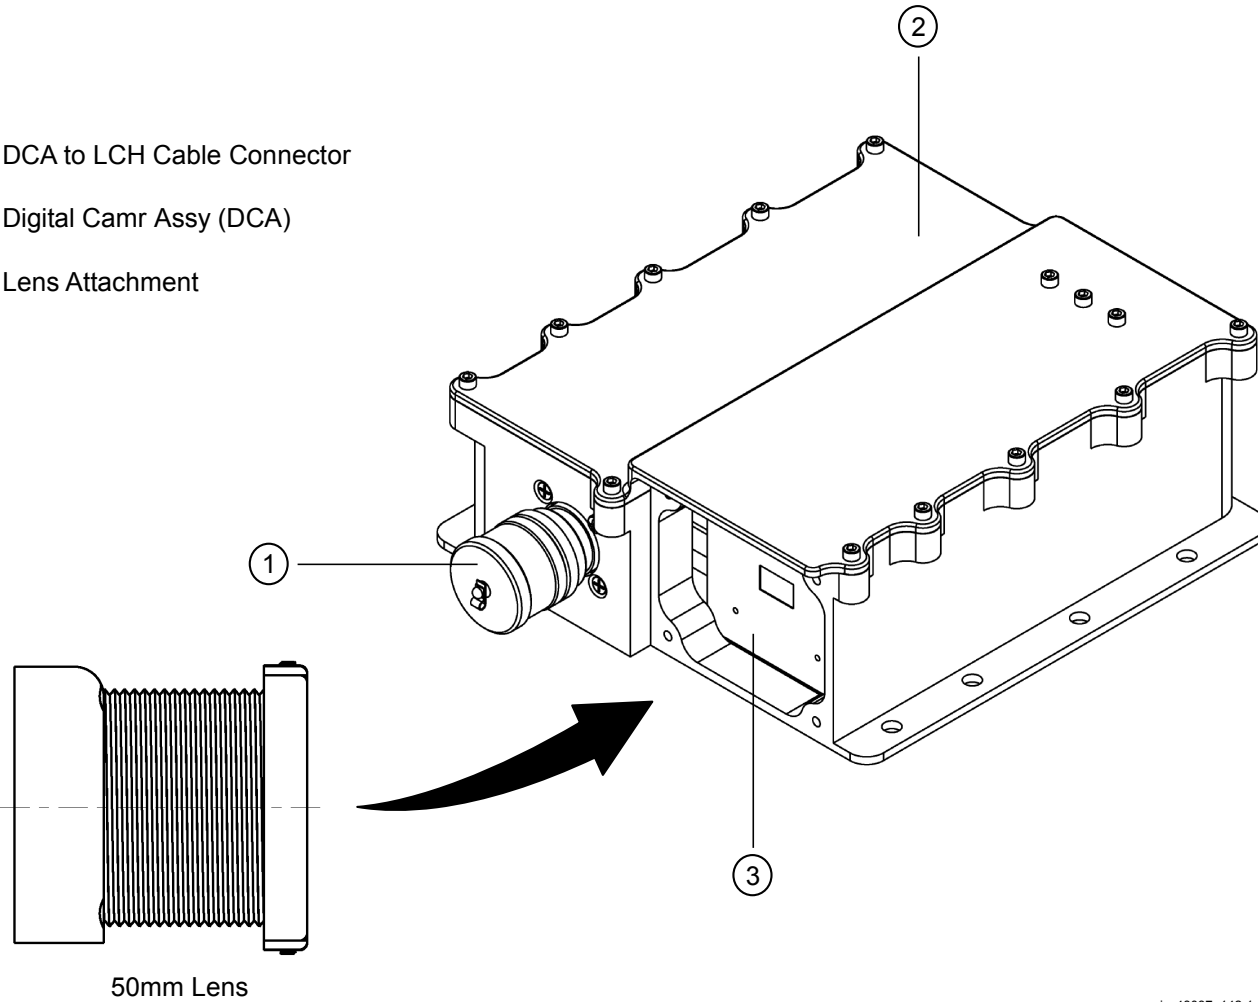

jsc48037_142r1.cvx

LASER CAMR SYSTEM (LCS)/INTEGRATED SENSOR INSPECTION SYSTEM DIGITAL CAMR (IDC) (Continued)

IDC SOFTWARE GUI

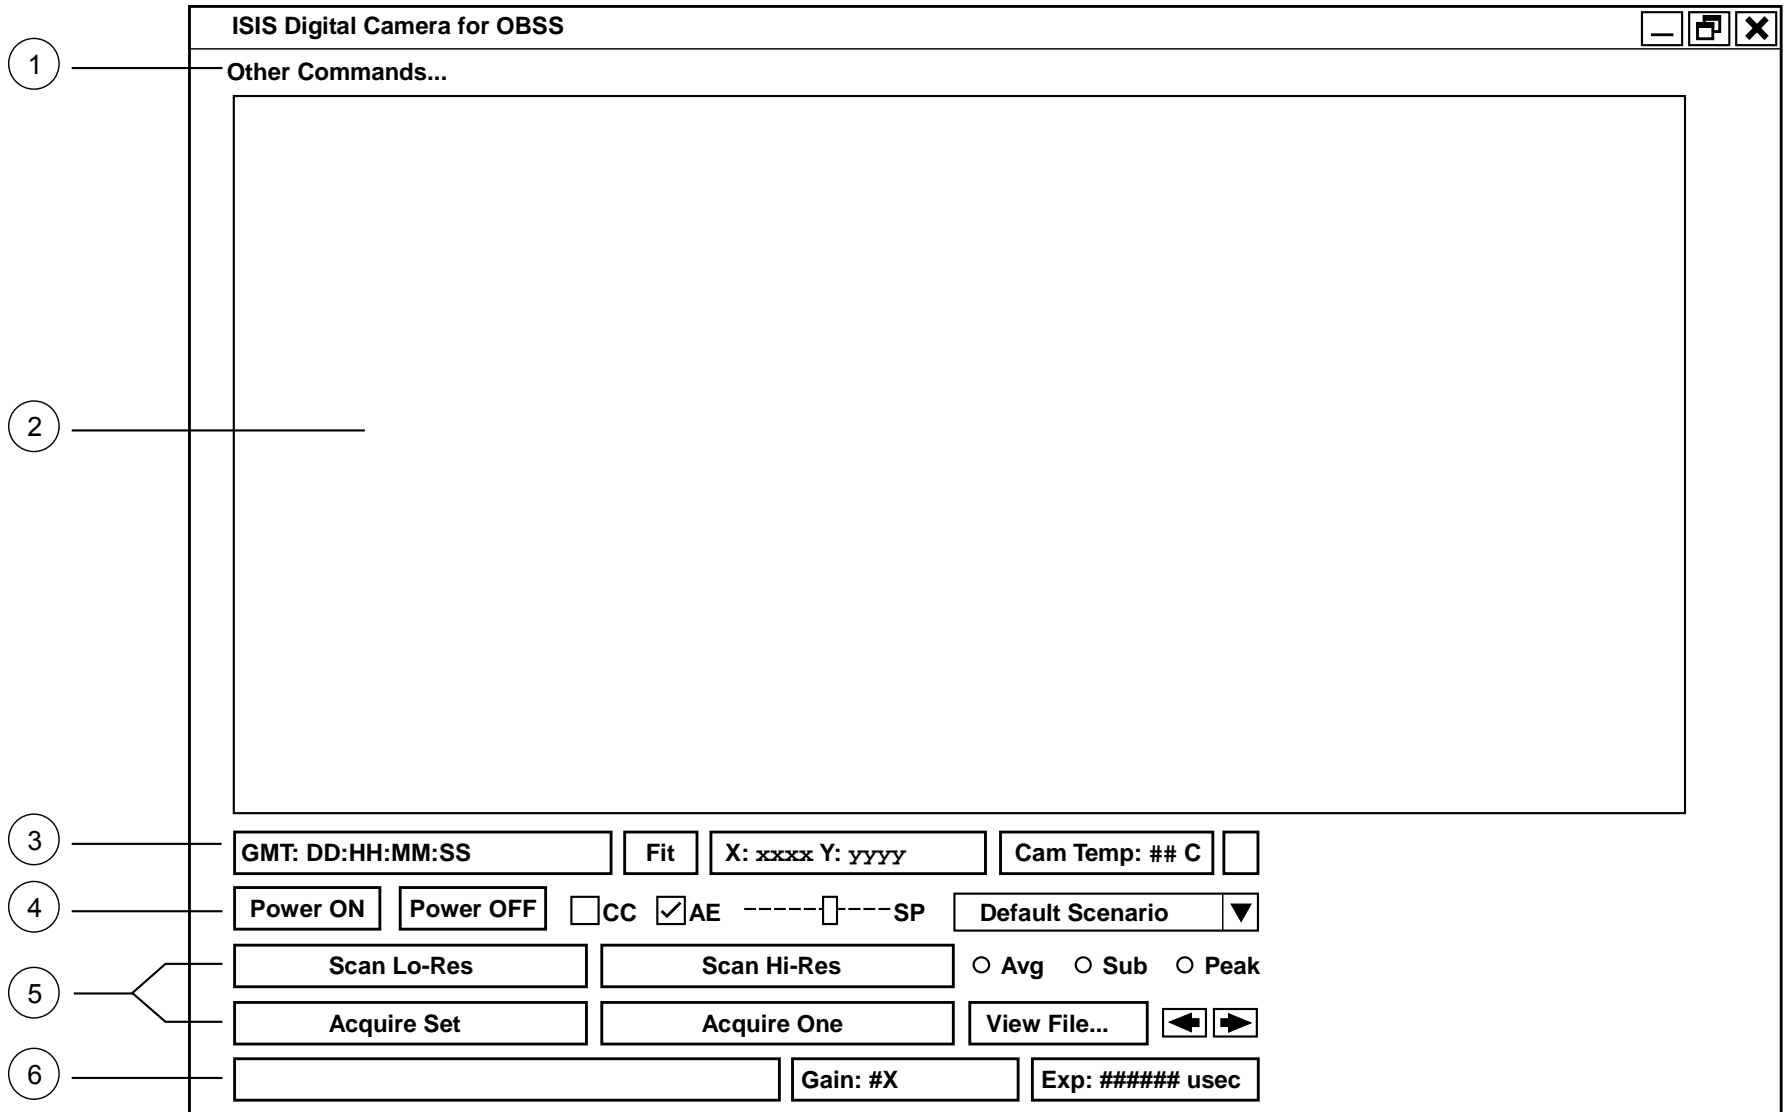

jsc48037_180r1.cvx

LASER CAMR SYSTEM (LCS)/INTEGRATED SENSOR INSPECTION SYSTEM DIGITAL CAMR (IDC) (Continued)

IDC SOFTWARE GUI (Continued)

1	Other Commands (Pulldown menu provides other commands w/hot keys)		
	Advanced Command	Brings up an Advanced Settings dialog box in which user may apply or see specific setting for individual image acquisition options. See pg 21-12	
	[F2]	Brings up "Add Notation" box for adding text to tiff. This text will be added to all tiffs; so, clear it if added to text box	
	[F5]	Toggle Summary View	
	[F6]	Toggle Image Mode	
	[F7]	Zoom In	
	[F8]	Zoom Out	
	[F9]	Reset Brightness and Contrast	
	[F10]	Reset Auto Exposure Aperture to Default	
	[F11]	Toggle Auto Exposure Aperture Visibility	
	[F12]	Find Auto Exposure Aperture	
2	Display Area	Shows the tiff or last image collected	
3	Status Bar 1		
	GMT	Displays current time	
	Zoom Level	Fit, 1X, 2X, 4X, 8X	
	Mouse Position	Shows "X,Y" positions of mouse	
	Camr Temperature	Temperature of Camr in Celsius	
	Comm Status Light	Blinking green light when in nominal case; static while imaging	
4	Power On/Off, Auto Exposure (AE), Color Coded (CC), Scenario File Drop List/Brightness and Contrast Controls]		
	[Power On]/[Power Off]	Buttons control the pwr to the IDC	
	[CC]	Allows user to color code the over and under exposed areas of image	
	[AE]	Allows selection of auto-exposure capability	
	AE Setpoint Slide Bar	Allows user to set starting exposure for AE algorithm. Bar can be used when Avg, Sub, and Peak algorithms selected	
	Scenario File Drop List	Drop down list allows user to select Gain and Exposure settings for all image acquisition buttons that depend upon light scenario	
	Brightness and Contrast	When user switches into "Image Mode", scenario drop down list turns into "Brightness and Contrast" controls, allowing user to manipulate viewable image Note: Brightness and Contrast has no control over Camr brightness or contrast	
5	Image Command Area		
	Image Acquisition Buttons (Each button may be accessed during another operation to switch acquisition types quickly. Allows user to set scene with "Scan Lo-Res" and then immediately select "Scan Hi-Res", "Acquire Set" or "Acquire One" as needed without extra action		
		Scan Lo-Res	Image(s) not saved to disk. Displays decimated Camr view. Used to set software exposure and situational awareness
		Scan Hi-Res	Continuously saves full images to disk
		Acquire Set	Image(s) saved to disk. Acquires bracket set of images
		Acquire One	Image saved to disk. Acquires one image with no exposure control from AE
		Avg	Selects averaging AE algorithm. Exposes based on pixels inside box
		Sub	Selects sub image AE algorithm. Takes two images
	Peak	Selects peak AE algorithm. Exposes based on brightest pixels in box	
	View and Save Files	Allows user to select a file from a directory to view or (when holding "CTRL" key while clicking on "Save File To..." button) select a directory indicating where subsequent images will be saved. Green arrows allow user to quickly browse thru images alphabetically	
6	Status Bar 2	Contains status of current operation, gain and exposure settings for image being displayed, Status Bar Error Advisory, Status Error Strings, and Normal Operation Strings	

LASER CAMR SYSTEM (LCS)/INTEGRATED SENSOR INSPECTION SYSTEM DIGITAL CAMR (IDC) (Continued)

IDC SOFTWARE GUI (Continued)

The image shows a software dialog box titled "Advanced Settings" with a close button (X) in the top right corner. The dialog is divided into three main sections: "Acquire One", "Acquire Set", and "Scan".

- Acquire One:** Contains "Exposure" (input field with "#####" and "usec") and "Gain" (input field with "#X" and a dropdown arrow).
- Acquire Set:** Contains "Select Image:" (input field with "#" and a spinner), "Exposure" (input field with "#####" and "usec"), "Gain" (input field with "#X" and a dropdown arrow), and "or Fraction" (input field with "X").
- Scan:** Contains "Select Type:" with radio buttons for "Lo-Res" (selected) and "Hi-Res", "Exposure" (input field with "#####" and "usec"), "Gain" (input field with "#X" and a dropdown arrow), "Decimation" (input field with "##" and a spinner), and "Period" (input field with "X" and "msec").

At the bottom of the dialog, there are three buttons: "Do Self Test", "Black Level" (input field with "##"), and a row of three buttons: "Cancel", "Reset to Defaults", and "Accept".

Callouts are shown on the left side of the dialog:

- 8: Points to the "Acquire One" section.
- 9: Points to the "Acquire Set" section.
- 10: Points to the "Scan" section.
- 11: Points to the "Do Self Test" button.

jsc48037_s20_181r3.cvx


LASER CAMR SYSTEM (LCS)/INTEGRATED SENSOR INSPECTION SYSTEM DIGITAL CAMR (IDC) (Continued)

IDC SOFTWARE GUI (Concluded)

8	"Acquire One" Settings (Allows user to set exposure and gain settings for "Acquire One" cmd which acquires a single image from Camr)	
	[Exposure]	User may set exposure from 25 usec to 80025 usec
	[Gain]	User may set Gain from 1X to 8X
9	"Acquire Set" Settings (user to set exposure and gain settings for "Acquire Set" cmd. Each image acquired in set can have a different setting for exposure and gain. [Display] checkbox will determine if image is to be displayed when acquired)	
	[Select Image]	As a default, user may select up to 7 images
	[Exposure]	User may set exposure from 25 usec to 80025 usec
	[Gain]	User may set Gain from 1X to 8X
	[or Fraction]	Shows denominator value for exposure value. A "1" is assumed for the numerator
10	"Scan" Settings (Allows user to exposure, gain, and decimation settings for low/high resolution continuous scans)	
	[Lo-Res]/[Hi-Res] Buttons	User selects which scan to set attributes to: Lo-Res – Scans are displayed only and not saved to disk Hi-Res – Scans are displayed and saved to disk
	[Exposure]	User may set exposure from 25 usec to 80025 usec
	[Gain]	User may set Gain from 1X to 8X
	[Decimation]	User may select a decimation level between 1-16. When decimation is a high number, time for image to be displayed on screen is faster due to smaller size and lower quality of image
	[Period]	Sets scan period. Allows user to throttle rate of image/file creation for some scan scenarios
11	"Do Self Test" Command	Queries IDC for an image test pattern which is then displayed on main display window. Test image is also stored to disk
	"Black Level" Input Box	Sets Camr's "Black Level" threshold for all acquired images. Can be set from 0 to 4095
	"Reset to Defaults" Command	Restores application defaults applied at startup to all settings. Holding CTRL and pressing "Reset to Defaults" will restore project defaults established in DCCS.ini file

LASER CAMR SYSTEM (LCS)/INTEGRATED SENSOR INSPECTION SYSTEM DIGITAL CAMR (IDC) (Continued)

LCS/IDC COMBINED NOMENCLATURE

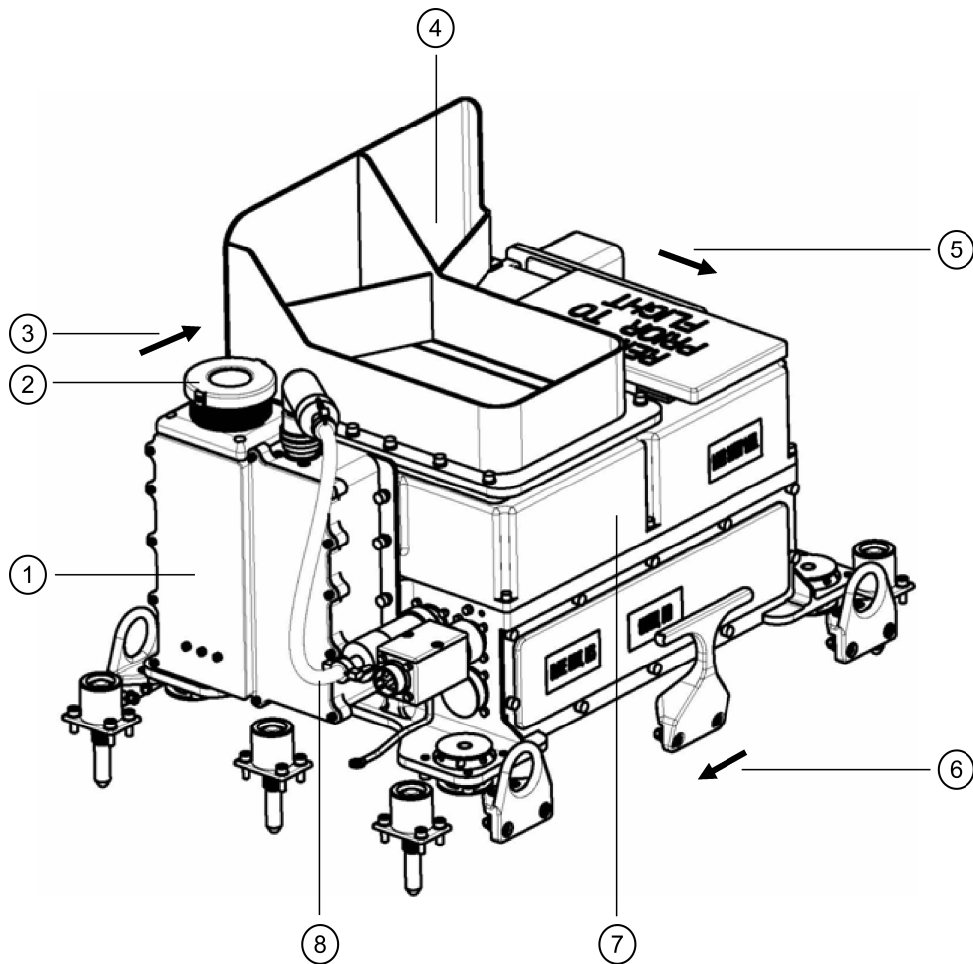


- ① ISIS Digital Camr (IDC)
- ② 50mm Lens
- ③ Top View (from IDC perspective)
- ④ LCH Radiator
- ⑤ Top View (from LCH scan perspective)
- ⑥ Towards OBSS Grapple Fixtures
- ⑦ Laser Camr Head (LCH)
- ⑧ Laser Camr Head (LCH) to Digital Camr Assy (DCA) Cable

jsc48037_143r1.cvx

LASER CAMR SYSTEM (LCS)/INTEGRATED SENSOR INSPECTION SYSTEM DIGITAL CAMR (IDC) (Continued)

LCS/IDC KEEP ALIVE PWR AND DATA INTERFACES (Berthed on MPMs)

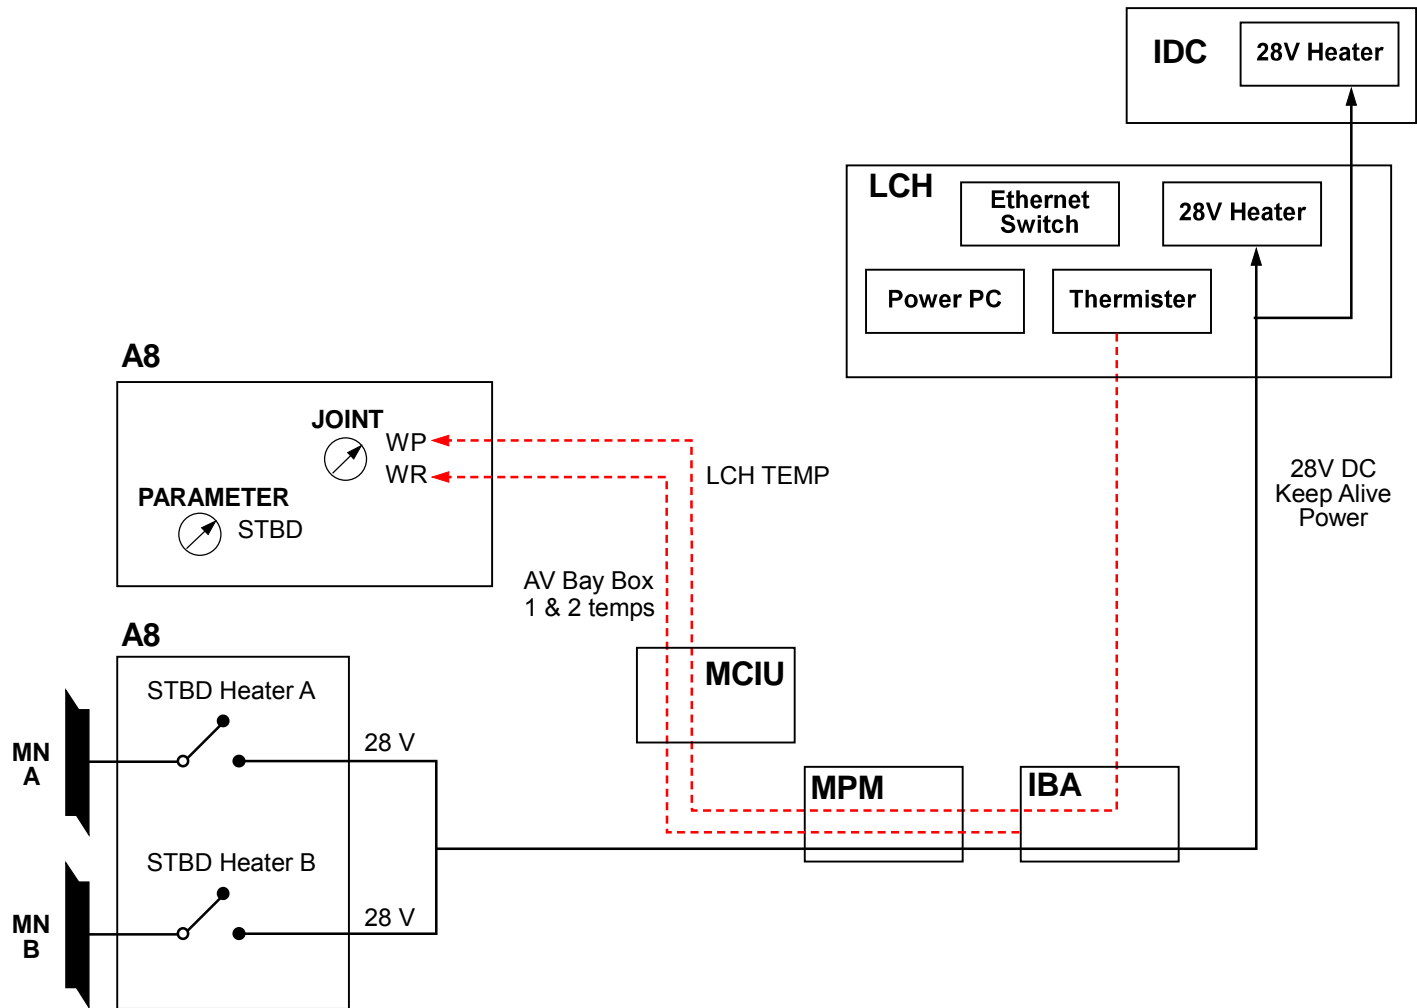


jsc48037_138r3.cvx


LASER CAMR SYSTEM (LCS)/INTEGRATED SENSOR INSPECTION SYSTEM DIGITAL CAMR (IDC) (Continued)

LCC SOFTWARE EXIT DIALOGUE BOXES


Case 1: Selecting "File" and choosing "Exit" w/green Comm light.

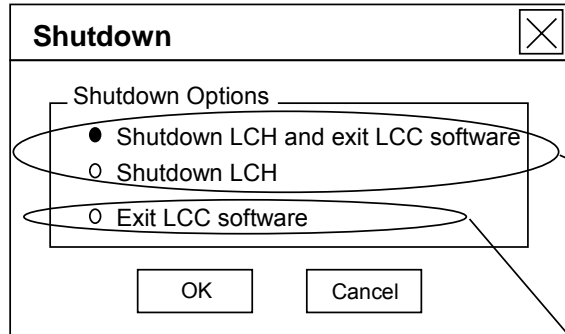


When either "Shutdown LCH and exit LCC software" or "Shutdown LCH" are selected from "Shutdown" dialogue box, following "Shutdown?" dialogue box displayed:

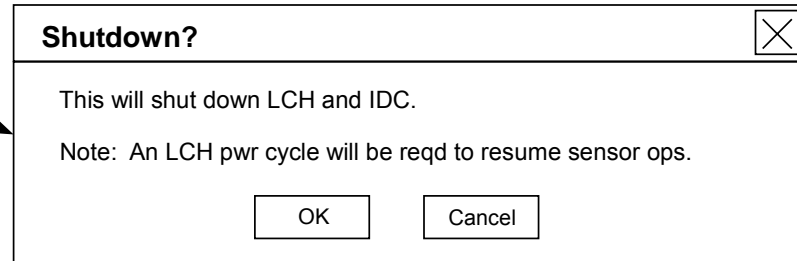

When "Exit LCC software" is selected from "Shutdown" dialogue box, following "Shutdown?" dialogue box displayed:

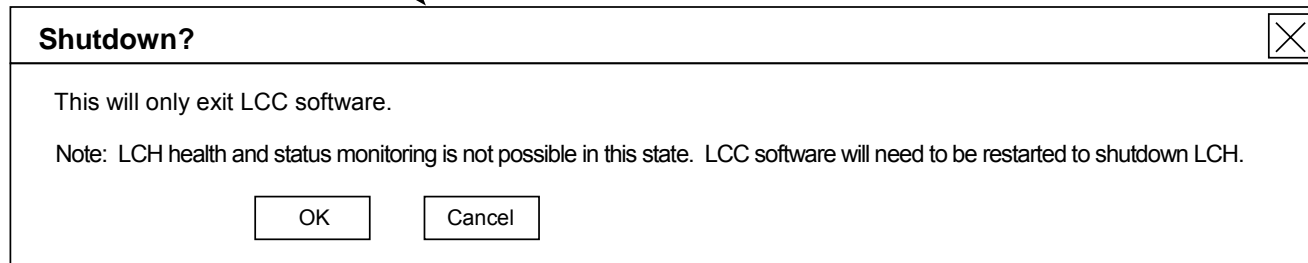

Case 2: Selecting "File" and choosing "Exit" w/yellow Comm light.

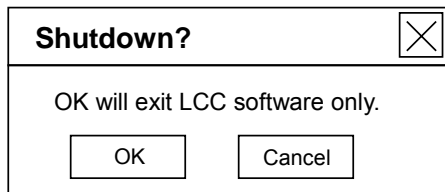

jsc48037_160.cvx

LASER CAMR SYSTEM (LCS)/INTEGRATED SENSOR INSPECTION SYSTEM DIGITAL CAMR (IDC) (Continued)

MANUAL A31p DESKTOP DNLK SETUP

NOTE

For desktop dnlk config to work correctly, ensure there is a load on A31p Video Out port (video coming out of laptop into pwr'd input, such as AVIU(V10))

- | | |
|---------------|---|
| MO58F
AVIU | 1. <input checked="" type="checkbox"/> Video destination properly configured per LCC ACTIVATION, step 1 (Cue Card, <u>LCS</u>) and pwr'd
<input checked="" type="checkbox"/> TV PWR – ON
<input checked="" type="checkbox"/> HI-Z/75 – 75
<input checked="" type="checkbox"/> PWR SELECT – LO |
| CC | PWR – OFF |
| A31p | 2. <u>Desktop</u>
Right click
Sel 'Properties' |
| | 3. <u>'Display Properties' Dialog Box</u>
Sel 'Settings'
<input checked="" type="checkbox"/> Screen Area – 1024 x 768
If not 1024 x 768:
Move Screen Area slidebar to 1024 x 768
Sel 'Apply'
When second 'Display Properties' dialog box opens:
Sel 'OK'
When 'Monitor Settings' dialog box opens:
Sel 'Yes' |
| | 4. <u>'Display Properties' Dialog Box</u>
Sel 'Advanced' |
| | 5. <u>'(Multiple Monitors) and ATI MOBILITY FIRE GL 7800 Properties' Dialog Box</u>
Sel 'Displays' tab |

LASER CAMR SYSTEM (LCS)/INTEGRATED SENSOR INSPECTION SYSTEM DIGITAL CAMR (IDC) (Continued)

MANUAL A31p DESKTOP DNLK SETUP (Continued)

6. ✓ 'Displays' tab against fig 20-1 cases' circled areas and perform matching case steps below:

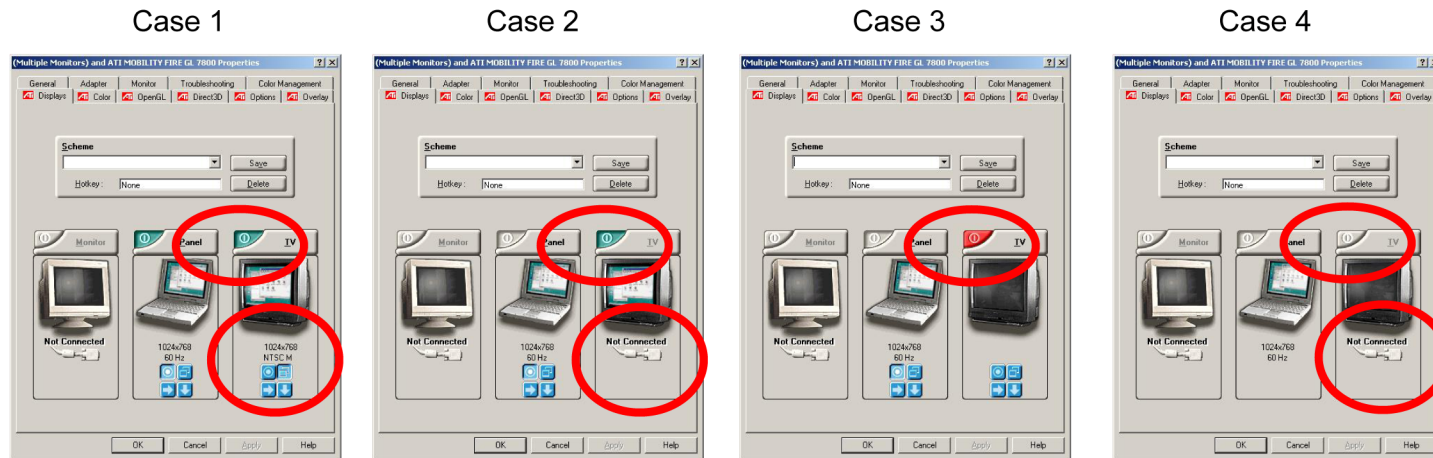


Figure 20-1.- Multiple monitors and ATI mobility fire GL 7800 display tab.

If Case 1 (Video out port enabled and good A31p video to powered AVIU):

Sel 'OK'

If Case 2 (Video signal lost due to bad LCS video cable, adapter, or AVIU setting):

Sel 'OK'

✓TV PWR – ON

✓LCS Video Cable connected to J1

✓LCS Video Adapter connected to A31p Video Out port

Repeat steps 4-6

If Case 3 (Video out port disabled and good LCS video cable connection to powered AVIU):

Click on red button in Case 3 circle

✓Display looks like Case 1

Sel 'OK'

When ATI Property Page appears:

Sel 'Yes'

MO58F
AVIU
A31p

LASER CAMR SYSTEM (LCS)/INTEGRATED SENSOR INSPECTION SYSTEM DIGITAL CAMR (IDC) (Continued)

MANUAL A31p DESKTOP DNLK SETUP (Concluded)

66. (Concluded)

~

|
If Case 4 (Bad LCS video cable, adapter, or connection, AVIU not powered or configured or A31p port problem):

AVIU
A31p

Sel 'OK'

√LCS Video Cable connected to J1

√LCS Video Adapter connected to A31p Video Out port

Repeat steps 4-6

If no longer Case 4:

| Repeat step 6

If still Case 4:

Sel 'OK'

Replace entire LCS Video Cable (including A31p Video Adapter)

Repeat steps 4-6

If no longer Case 4:

| Repeat step 6

If still Case 4:

Sel 'OK'

Replace AVIU

Repeat steps 4-6

If no longer Case 4:

| Repeat step 6

If still Case 4:

Sel 'OK'

Replace A31p

Repeat steps 1-6

If no longer Case 4:

| Repeat step 6

If still Case 4:

√MCC

7. 'Display Properties' Dialog Box

Sel 'OK'

LASER CAMR SYSTEM (LCS)/INTEGRATED SENSOR INSPECTION SYSTEM DIGITAL CAMR (IDC) (Continued)

RECONFIGURATION OF A31p SCREEN RESOLUTION

NOTE

Following steps will disable auto reconfiguration that automatically ships video. Capture Card will need to be manually configured using MANUAL A31p USING DESKTOP DNLK SETUP procedure, 20-17 for desktop dnlk ops

- A31p
1. Desktop
Right click
Sel 'Properties'
 2. 'Display Properties' Dialog Box
Sel 'Settings'
Sel 'Advanced'
 3. '(Multiple Monitors) and ATI MOBILITY FIRE GL 7800 Properties' Dialog Box
Sel 'Displays'
 4. TV display tab
If Red(Gray) tab:
| Go to step 5
If Green tab:
Click Green tab. Tab automatically turns red after selection (see fig 20-1)
Sel 'Apply'
 5. 'ATI Property Page' Dialog Box
Sel 'Yes'
 6. '(Multiple Monitors) and ATI MOBILITY FIRE GL 7800 Properties' Dialog Box
Sel 'OK'
 7. 'Display Properties' Dialog Box
Sel 'OK'
 8. Desktop
Right Click
Sel 'Properties'

LASER CAMR SYSTEM (LCS)/INTEGRATED SENSOR INSPECTION SYSTEM DIGITAL CAMR (IDC) (Continued)

RECONFIGURATION OF A31p SCREEN RESOLUTION (Concluded)

9. 'Display Properties' Dialog Box
 - Sel 'Settings'
 - Move Screen Area slidebar to 1600 x 1200
 - √Colors – True Color (32 bit)
 - If not, sel True Color (32 bit) from drop down menu
 - Sel 'Apply'
 - When 'Display Properties' dialog box opens:
 - Sel 'OK'
 - When 'Monitor Settings' dialog box opens:
 - Sel 'Yes' (within 15 sec)
 - If 15 sec window missed:
 - Repeat step 9
 - When 'Display Properties' dialog box opens:
 - Sel 'OK'

This Page Intentionally Blank

BATTS & FUSES

PAGE


BATT/FUSE REFERENCE..... 21-2

BATTS & FUSES

BATTS & FUSES

BATT/FUSE REFERENCE

ITEM	BATTERY	SAME AS:	FUSE	SAME AS:	
AVIU	NONE	N/A	2A (1/8 x 1/2)	ET A-B Converter	
BINOCULARS – 14 X40 GYRO – 10 X40 GYRO	AA (6)	CC Remote ET A-B Converter NIKON FLASH	NONE	N/A	
BPSMU	18V (two 9V)	NONE	NONE	N/A	
CAMCORDER – G1	Li-ION	RECORDER – V10 WORKLIGHT	NONE	N/A	
CC Batt Charger	N/A	N/A	3A (Instrument)		
CC Remote	AA(2)	GYRO BINOCULARS ET A-B Converter NIKON FLASH	NONE	N/A	
D2Xs	EN-EL4A	NONE	N/A	N/A	
D2Xs (Date Time)	CR 1616	NONE	NONE	NONE	
DTV (MUX)	NONE	NONE	5A		
DTV (VIP)	NONE	NONE	2A (Instrument) 5A (Instrument)	SSV	
ET A-B CONVERTER	AA (4)	CC Remote NIKON FLASH GYRO BINOCULARS	2A (1/8 x 1/2)	AVIU	
LAVALIER MIC	76 (1)	NONE	NONE	NONE	
NIKON FLASH	AA (4)	CC Remote GYRO BINOCULARS ET A-B Converter	NONE	N/A	
RECORDER – V10	Li-ION	CAMCORDER – G1 WORKLIGHT	NONE	N/A	
SEQUENTIAL STILL VIDEO ENCODER	N/A	N/A	2A (Instrument)	NONE	
WORKLIGHT	Li-ON (2)	CAMCORDER – G1 RECORDER V-10		NONE	
INSTRUMENT FUSES		IFM FUSE KITS		BUS FUSES (1/4 X 1-1/4)	
1/2 A(2)	5A (5)	DTV FUSES		1/4A (2)	3A (2)
1A (5)	7.5A (2)	2A (3)		1/2A (2)	5A (5)
2A (2)	10A (2)	2A (5)		1A (2)	7.5A (2)
3A (5)				2A (2)	10A (2)

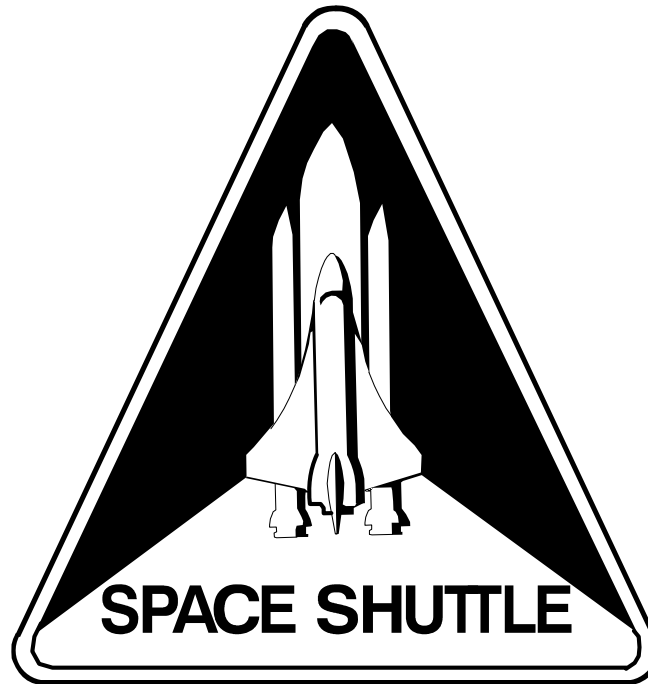

**PHOTO/TV
CHECKLIST**

**STS
ALL**