

# Deorbit Prep

## Mission Operations Directorate Operations Division

Generic, Rev Q  
July 1, 2009

### NOTE

For STS-128 and subsequent flights

National Aeronautics and  
Space Administration

Lyndon B. Johnson Space Center  
Houston, Texas



Verify this is the correct version for the pending operation (training, simulation or flight).  
Electronic copies of FDF books are available. URL: <http://mod.jsc.nasa.gov/do3/FDF/index.html>




MISSION OPERATIONS DIRECTORATE

**DEORBIT PREP**

GENERIC, REVISION Q

July 1, 2009

PREPARED BY:

  
\_\_\_\_\_  
Anita Valle  
Publication Manager

APPROVED BY:

  
\_\_\_\_\_  
Manager, Flight Procedures

ACCEPTED BY:

  
\_\_\_\_\_  
Michael T. Hurt  
FDF Manager

This document is under the configuration control of the Crew Procedures Control Board (CPCB). All proposed changes must be submitted via Change Request Workflow (CRW) to DO3/FDF Manager.

Additional distribution of this book, for official use only, may be requested in writing to DO3/PMO Administrator. The request must include justification and requester's name, organization, position, and phone number. Contractor requests are made through the NASA or DOD organization supported. Deletions, reduction in quantity, or change of address may be submitted to DO3/FDF Management Office, 281-244-1184.

Incorporates the following:
482#: PI-00866

AREAS OF TECHNICAL RESPONSIBILITY

Publication Manager	DO3/A. Valle	281-244-6401
Alternate Book Manager	DO3/A. Blaylock	281-244-1184

**LIST OF EFFECTIVE PAGES**

GENERIC 09/16/87  
REV Q 07/01/09

Sign Off .....	*	ALL/GEN Q	2-5 .....	ALL/GEN Q
ii.....	*	ALL/GEN Q	2-6 .....	ALL/GEN Q
iii.....	*	ALL/GEN Q	2-7 .....	ALL/GEN Q
iv.....	*	ALL/GEN Q	2-8 .....	ALL/GEN Q
v .....	*	ALL/GEN Q	2-9 .....	ALL/GEN Q
vi.....	*	ALL/GEN Q	2-10 .....	ALL/GEN Q
vii.....		ALL/GEN Q	2-11 .....	ALL/GEN Q
viii.....		ALL/GEN Q	2-12 .....	ALL/GEN Q
1-1 .....		ALL/GEN Q	2-13 .....	ALL/GEN Q
1-2 .....		ALL/GEN Q	2-14 .....	ALL/GEN Q
1-3 .....		ALL/GEN Q	2-15 .....	☒† ALL/GEN Q
1-4 .....		ALL/GEN Q	2-16 .....	† ALL/GEN Q
1-5 .....		ALL/GEN Q	2-17 .....	ALL/GEN Q
1-6 .....		ALL/GEN Q	2-18 .....	ALL/GEN Q
1-7 .....		ALL/GEN Q	3-1 .....	ALL/GEN Q
1-8 .....		ALL/GEN Q	3-2 .....	ALL/GEN Q
1-9 .....		ALL/GEN Q	(OV103) A3-3 .....	3/GEN Q
1-10 .....		ALL/GEN Q	(OV103) A3-4 .....	3/GEN Q
1-11 .....		ALL/GEN Q	(OV103) A3-5 .....	3/GEN Q
1-12 .....		ALL/GEN Q	(OV103) A3-6 .....	3/GEN Q
1-13 .....		ALL/GEN Q	(OV103) A3-7 .....	3/GEN Q
1-14 .....		ALL/GEN Q	(OV103) A3-8 .....	ALL/GEN Q
1-15 .....		ALL/GEN Q	(OV103) A3-9 .....	‡ 3/GEN Q
1-16 .....		ALL/GEN Q	(OV103) A3-10 .....	‡ 3/GEN Q
1-17 .....		ALL/GEN Q	(OV103) A3-11 .....	‡ 3/GEN Q
1-18 .....		ALL/GEN Q	(OV103) A3-12 .....	‡ 3/GEN Q
1-19 .....		ALL/GEN Q	(OV103) A3-13 .....	3/GEN Q
1-20 .....		ALL/GEN Q	(OV103) A3-14 .....	ALL/GEN Q
1-21 .....		ALL/GEN Q	(OV103) A3-15 .....	3/GEN Q
1-22 .....		ALL/GEN Q	(OV103) A3-16 .....	3/GEN Q
1-23 .....		ALL/GEN Q	(OV103) A3-17 .....	3/GEN Q
1-24 .....		ALL/GEN Q	(OV103) A3-18 .....	3/GEN Q
1-25 .....		ALL/GEN Q	(OV103) A3-19 .....	3/GEN Q
1-26 .....		ALL/GEN Q	(OV103) A3-20 .....	3/GEN Q
1-27 .....		ALL/GEN Q	(OV103) A3-21 .....	ALL/GEN Q
1-28 .....		ALL/GEN Q	(OV103) A3-22 .....	3/GEN Q
1-29 .....	†	ALL/GEN Q	(OV103) A3-23 .....	3/GEN Q
1-30 .....	†	ALL/GEN Q	(OV103) A3-24 .....	3/GEN Q
1-31 .....		ALL/GEN Q	(OV103) A3-25 .....	3/GEN Q
1-32 .....		ALL/GEN Q	(OV103) A3-26 .....	3/GEN Q
1-33 .....	☒	ALL/GEN Q	(OV103) A3-27 .....	3/GEN Q
1-34 .....		ALL/GEN Q	(OV103) A3-28 .....	3/GEN Q
2-1 .....		ALL/GEN Q	(OV103) A3-29 .....	‡ 3/GEN Q
2-2 .....		ALL/GEN Q	(OV103) A3-30 .....	‡ 3/GEN Q
2-3 .....		ALL/GEN Q	(OV103) A3-31 .....	‡ 3/GEN Q
2-4 .....		ALL/GEN Q	(OV103) A3-32 .....	‡ 3/GEN Q

\* – Omit from flight book  
 † – MS pullout page. Add in MS2 copy only, in back of book  
 ☒ – Prelift – off information reqd  
 ‡ – Add extra copies in back of all books

(OV104) B3-3.....	4/GEN Q	(OV105) C3-26.....	5/GEN Q
(OV104) B3-4.....	4/GEN Q	(OV105) C3-27.....	5/GEN Q
(OV104) B3-5.....	4/GEN Q	(OV105) C3-28.....	5/GEN Q
(OV104) B3-6.....	4/GEN Q	(OV105) C3-29..... ‡	5/GEN Q
(OV104) B3-7.....	4/GEN Q	(OV105) C3-30..... ‡	5/GEN Q
(OV104) B3-8.....	ALL/GEN Q	(OV105) C3-31..... ‡	5/GEN Q
(OV104) B3-9..... ‡	4/GEN Q	(OV105) C3-32..... ‡	5/GEN Q
(OV104) B3-10..... ‡	4/GEN Q	4-1.....	ALL/GEN Q
(OV104) B3-11..... ‡	4/GEN Q	4-2.....	ALL/GEN Q
(OV104) B3-12..... ‡	4/GEN Q	5-1.....	ALL/GEN Q
(OV104) B3-13.....	4/GEN Q	5-2.....	ALL/GEN Q
(OV104) B3-14.....	ALL/GEN Q	5-3.....	ALL/GEN Q
(OV104) B3-15.....	4/GEN Q	5-4.....	ALL/GEN Q
(OV104) B3-16.....	4/GEN Q	5-5.....	ALL/GEN Q
(OV104) B3-17.....	4/GEN Q	5-6.....	ALL/GEN Q
(OV104) B3-18.....	4/GEN Q	5-7.....	ALL/GEN Q
(OV104) B3-19.....	4/GEN Q	5-8.....	ALL/GEN Q
(OV104) B3-20.....	4/GEN Q	5-9.....	ALL/GEN Q
(OV104) B3-21.....	ALL/GEN Q	5-10.....	ALL/GEN Q
(OV104) B3-22.....	4/GEN Q	6-1.....	ALL/GEN Q
(OV104) B3-23.....	4/GEN Q	6-2.....	ALL/GEN Q
(OV104) B3-24.....	4/GEN Q	6-3.....	ALL/GEN Q
(OV104) B3-25.....	4/GEN Q	6-4.....	ALL/GEN Q
(OV104) B3-26.....	4/GEN Q	7-1.....	ALL/GEN Q
(OV104) B3-27.....	4/GEN Q	7-2.....	ALL/GEN Q
(OV104) B3-28.....	4/GEN Q	7-3.....	ALL/GEN Q
(OV104) B3-29..... ‡	4/GEN Q	7-4.....	ALL/GEN Q
(OV104) B3-30..... ‡	4/GEN Q	8-1.....	* ALL/GEN Q
(OV104) B3-31..... ‡	4/GEN Q	CC 8-2.....	* ALL/GEN Q
(OV104) B3-32..... ‡	4/GEN Q	CC 8-3.....	* ALL/GEN Q
(OV105) C3-3.....	5/GEN Q	CC 8-4.....	* ALL/GEN Q
(OV105) C3-4.....	5/GEN Q	CC 8-5.....	* ALL/GEN Q
(OV105) C3-5.....	5/GEN Q	8-6.....	* ALL/GEN Q
(OV105) C3-6.....	5/GEN Q		
(OV105) C3-7.....	5/GEN Q		
(OV105) C3-8.....	ALL/GEN Q		
(OV105) C3-9..... ‡	5/GEN Q		
(OV105) C3-10..... ‡	5/GEN Q		
(OV105) C3-11..... ‡	5/GEN Q		
(OV105) C3-12..... ‡	5/GEN Q		
(OV105) C3-13.....	5/GEN Q		
(OV105) C3-14.....	ALL/GEN Q		
(OV105) C3-15.....	5/GEN Q		
(OV105) C3-16.....	5/GEN Q		
(OV105) C3-17.....	5/GEN Q		
(OV105) C3-18.....	5/GEN Q		
(OV105) C3-19.....	5/GEN Q		
(OV105) C3-20.....	5/GEN Q		
(OV105) C3-21.....	ALL/GEN Q		
(OV105) C3-22.....	5/GEN Q		
(OV105) C3-23.....	5/GEN Q		
(OV105) C3-24.....	5/GEN Q		
(OV105) C3-25.....	5/GEN Q		

‡ – Add extra copies in back of all books

\* – Omit from flight book

## DEORBIT CUE CARDS

<u>Title</u>	<u>Ref. Page</u>	<u>Card No.</u>
MS MIDDECK ACTIVITIES (Front) .....	CC 8-2	D/O-1a/E/A
(Back).....	CC 8-3	D/O-1b/E/A
MS MIDDECK BACKOUT ACTIVITIES (Front).....	CC 8-4	D/O-2a/E/A
(Back).....	CC 8-5	D/O-2b/E/A

This Page Intentionally Blank



CONTENTS

PAGE

NOMINAL DEORBIT PREP PROCEDURES ..... 1-1

DEORBIT PREP BACKOUT PROCEDURES ..... 2-1

ENTRY SWITCH LIST/VERIFICATION..... 3-1

BFS DEORBIT PREP NOTES..... 4-1

CONTINGENCY DELTAS TO NOMINAL DEORBIT PREP ..... 5-1

PLBD CONTINGENCY EVA TIMELINE ..... 6-1

HARDWARE CONTINGENCY EVA TIMELINE..... 7-1

CUE CARD CONFIGURATION ..... 8-1

This Page Intentionally Blank

**NOMINAL DEORBIT PREP PROCEDURES**

This Page Intentionally Blank


# NOMINAL DEORBIT PREP OVERVIEW OF CONFIGURATION MANAGEMENT

DPS	OPS 1 ASC C/L					OPS 2 ON-ORBIT					OPS 2 DEORBIT PREP TIG -03:28					OPS 3 DEORBIT PREP TIG -02:20					SEAT INGRESS TIG -01:00					EI-5	V=15K										
GPC OPS	1 G1	2 G1	3 G1	4 G1	5 BFS	1 G2	2 G2	3 G2F	4 SM	5 BFS	1 G2	2 G2	3 G2F	4 SM	5 BFS	1 G3	2 G3	3 G3	4 G3	5 BFS	1 G3	2 G3	3 G3	4 G3	5 BFS												
POWER OUTPUT MODE	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON			ON	ON	ON	ON	ON					
CONFIG GPC	1 1 2 3 4 0					2 1 2 0 0 0					4 (5) 0 0 0 4 0					2 1 2 0 0 0					4 (5) 0 0 0 4 0					3 1 2 3 4 0					3 1 2 3 4 0						
STR	1	1				1				0	0					1				0	0					1					1						
PL	1/2	1				0				4	0					0				4	0					1					1						
CRT	1	1				1				4	1				4	1				4	1					1					1						
L	1	1				0				4	0				4	0				4	0					0					0						
MM	1	1				1				4	1				4	1				4	1					1					1						
MDM	ALL ON					ALL ON					ALL ON					ALL ON					ALL ON																
D & C	DDU MDU IDP/CRT		L,R ALL FWD-ON 1,2,3,4			OFF CRT 1,2,4-ON 1,2,4-ON					L,R					ALL FWD-ON 1,2,3,4-ON																					
E C L S	AV BAY FAN CABIN FAN IMU FAN WATER LP FREON LP RADIATOR		1-B,2-A,3-B A B 1-OFF,2-ON 1-B,2-B Stow			1-GPC,2-ON					1-OFF,2-ON																										
F C S / N E A V A O I R S	FCS ASA ACCEL RGA ADTA IMU RA TACAN# GPS* UHF MLS		AUTO ALL ON ALL ON ALL ON ALL ON ALL ON ALL ON ALL ON ALL ON ON ALL OFF			OFF OFF OFF OFF OFF OFF OFF OFF 2-ON, 1,3 OFF OFF					ALL ON ALL ON ALL ON ALL ON ALL ON ALL ON ALL ON ALL ON ALL ON																										
R J D	RJDA RJDF VERNIER		ALL ON ALL ON OFF			ON															OFF																


#TACAN not available on OV105

\*Three-string GPS available only on OV105

# NOMINAL DEORBIT PREP SUMMARY TIMELINE

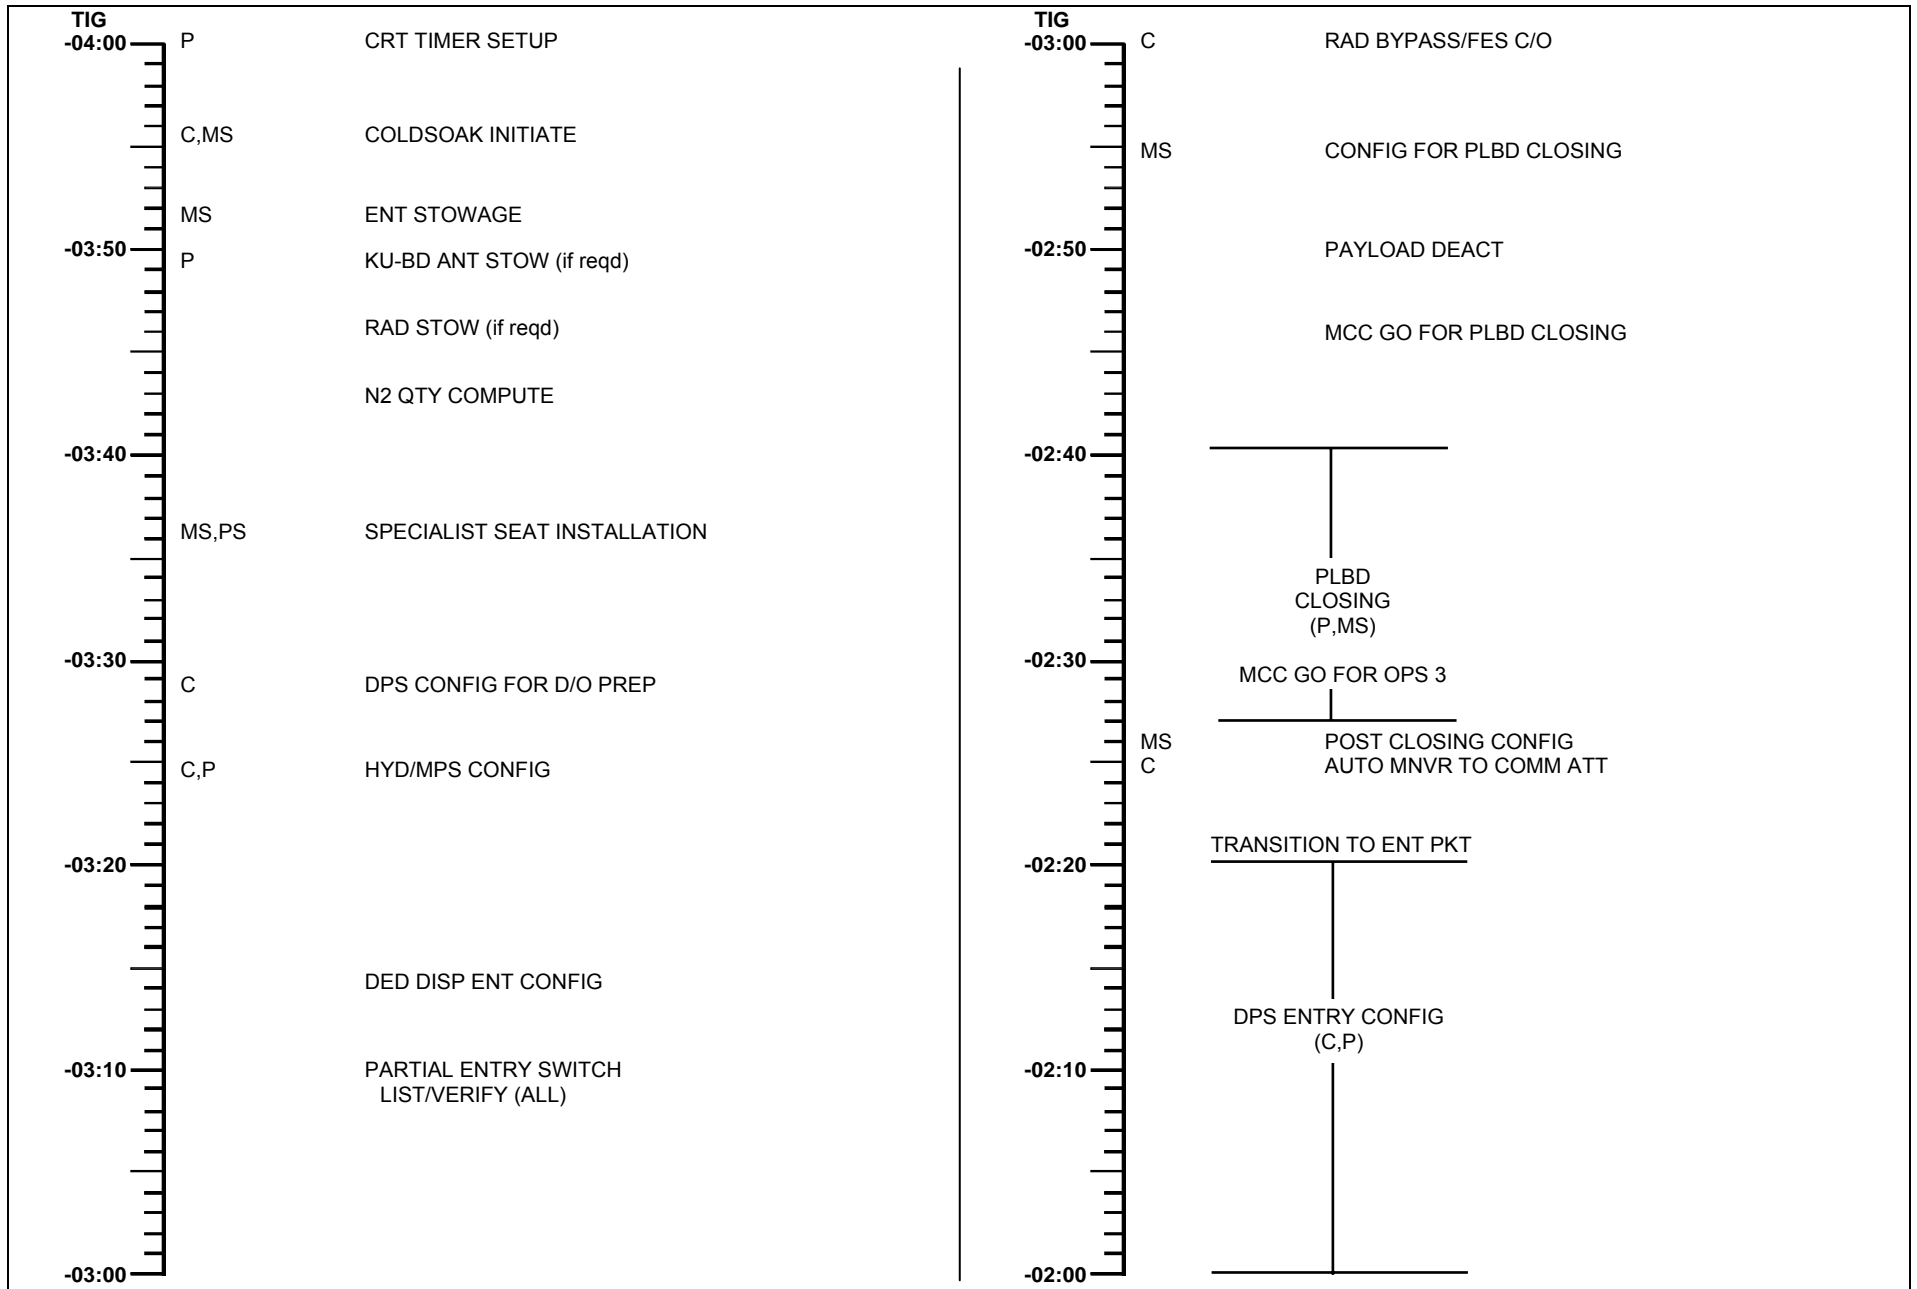

# NOMINAL DEORBIT PREP SUMMARY TIMELINE (Cont)

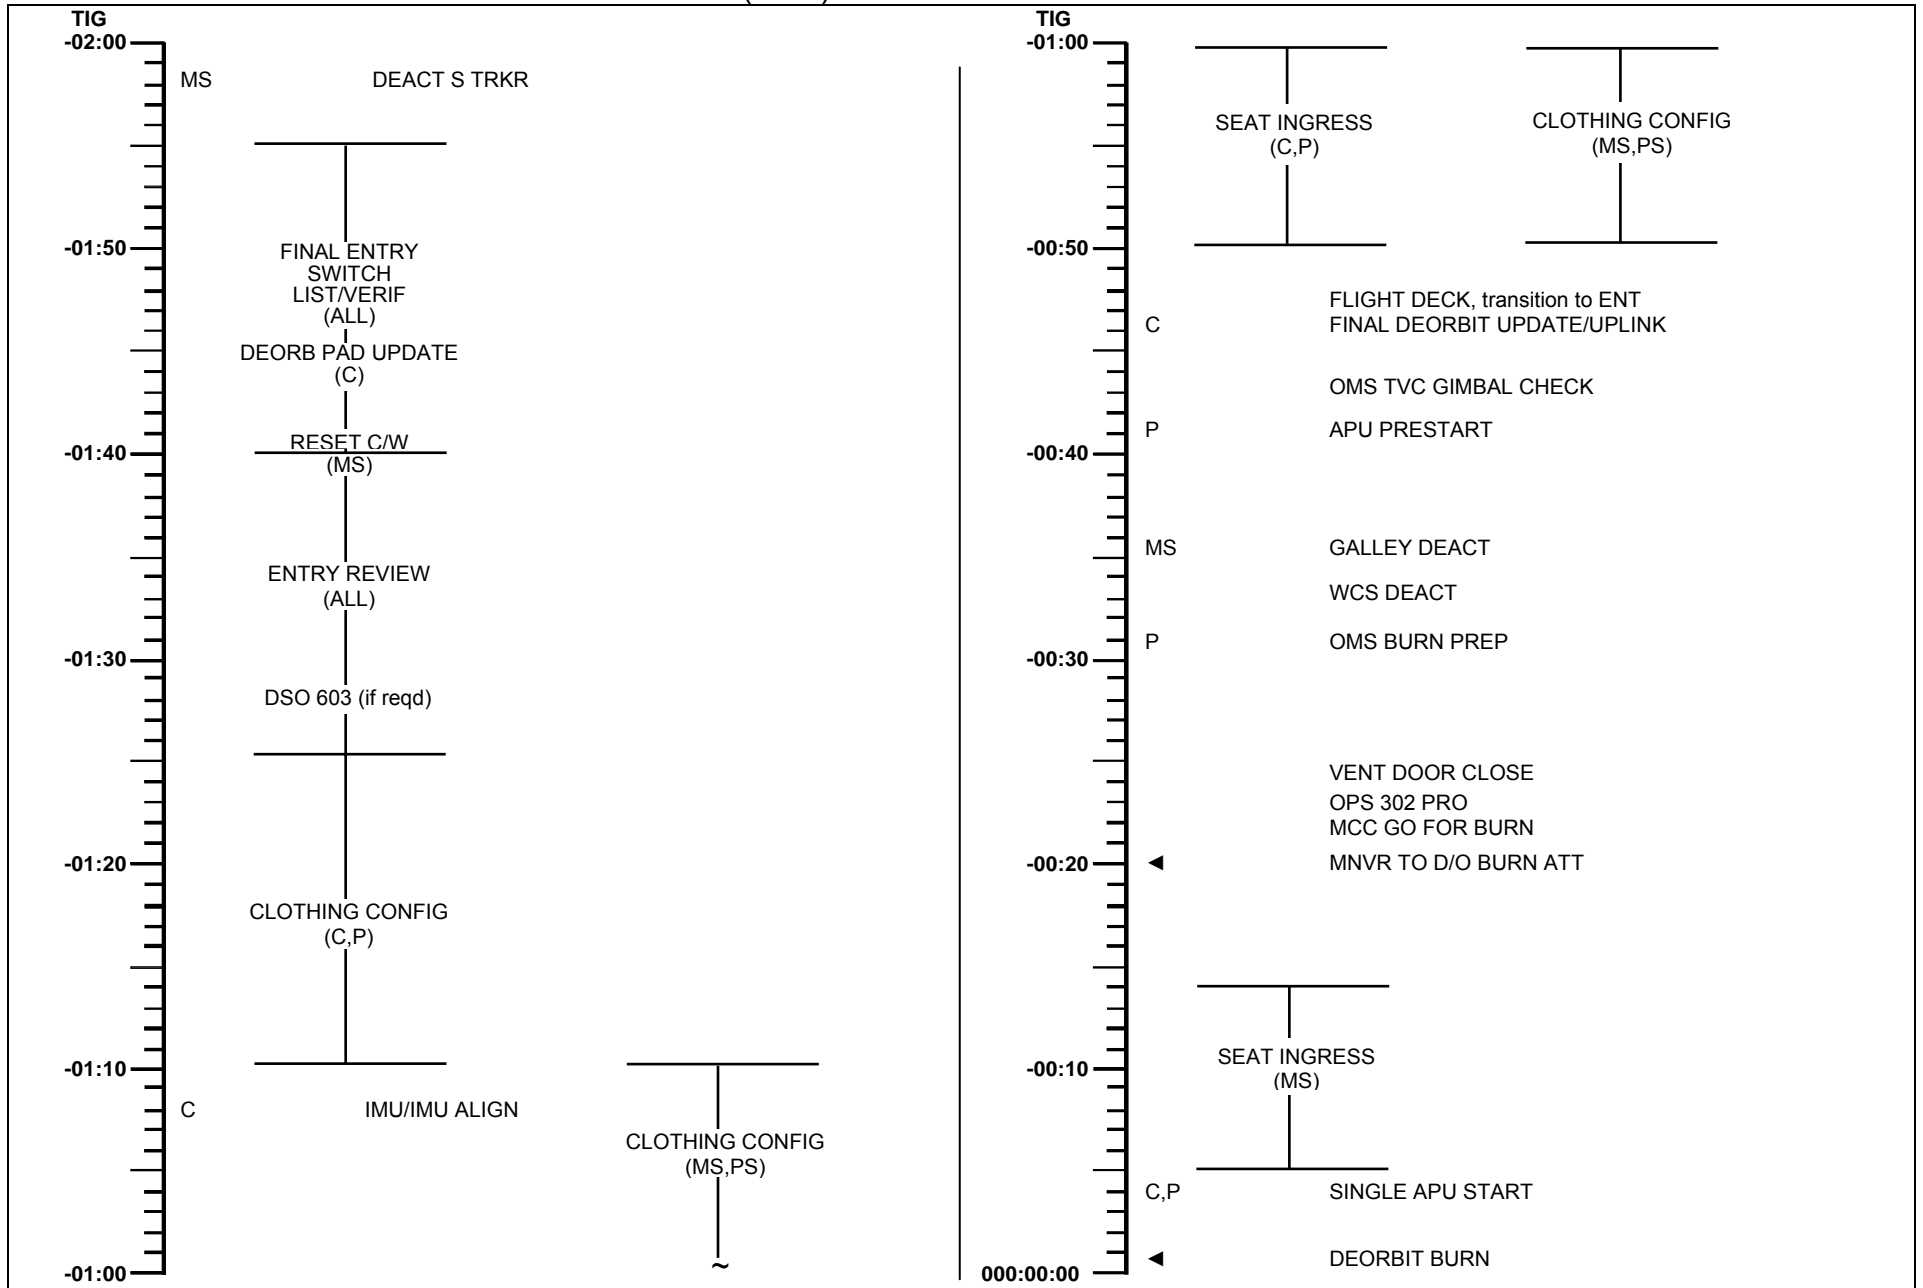

## NOMINAL DEORBIT PREP

For cabin temperature management, use maximum of 25% on backlit panel lighting unless reqd for visibility

- \* If TIME to TIG < 4 hr and > 2 hr 40 min: \*
- \* 1. ACCOMPLISH IMMEDIATELY: \*
- \* MNVR (TRK) BIASED -XSI (if not already in TAIL SUN) \*
- \* CRTX            TGT ID            +4 (blanks OM) \*
- \*                    BODY VECT +5 \*
- \*                    P                    +184 \*
- \*                    √OM                (blank) \*
- \*                    Initiate TRK \*
- \* 2. Back out of PRIORITY PWRDN as reqd (ORB PKT, PRIOR PWRDN) \*
- \* 3. If previous FC PURGE was not accomplished within last 6 hr: \*
- \*     Accomplish FC PURGE (ORB OPS, EPS) during D/O Prep prior to DPS ENTRY \*
- \*     CONFIG \*
- \* 4. MS accomplish CABIN CONFIG/STOW (FLIGHT PLAN) during D/O Prep timeframe \*
- \* 5. Begin Deorbit Prep timeline immediately and perform procedure as rapidly as possible \*

VERIFY THAT FOLLOWING ACTIVITIES HAVE BEEN ACCOMPLISHED:

FCS CHECKOUT (ORB OPS, GNC)

RCS HOT FIRE TEST (ORB OPS, RCS)

CABIN CONFIG/STOW (FLIGHT PLAN)

IMU ALIGN – S TRK (ORB OPS, GNC)

MNVR (TRK) BIASED – XSI (FLIGHT PLAN, DETAILED TIMELINE)

FC PURGE (ORB OPS, EPS)

Back out of PRIORITY PWRDN as reqd (ORB PKT, PRIOR PWRDN)



		1: GNC UNIV PTG	2: SM SYS SUMM 1	
<p><b>TIG</b> -04:00</p> <p>A5(B1) AUTO VERN RT 0.2 DB 1.0</p>	<p>P</p> <p>C,MS</p> <p>-03:55</p> <p>MS</p> <p>-03:50</p> <p>P</p> <p>-03:45</p> <p>S66</p> <p>-03:40</p> <p>S68, 168</p> <p>MS, PS</p> <p>-03:35</p> <p>-03:30</p>	<p><u>CRT TIMER SETUP</u> [ 1 ]</p> <p><u>COLDSOAK INITIATE</u> [ 2 ]</p> <p>Verify in ATT: DAP: A5/AUTO/VERN(ALT) If no FWD RCS: √A6/AUTO/ALT √DAP: B set to B1</p> <p><u>ENT STOWAGE</u> [ 3 ], 1-31 <u>ENT AIRLOCK CONFIG</u> [ 3A ], 1-32</p> <p>KU-BD ANT STOW, if deployed (ORB OPS, <u>COMM/INST</u>)</p> <p>RAD STOW, if reqd (ORB OPS, <u>ECLS</u>)</p> <p><u>N2 QTY COMPUTE</u> Add N2 QTY 1 + 2 Then annotate CABIN PRESS LEAK NOMOGRAPH (ENT PKT, <u>ECLS</u>)</p> <p><u>DETERMINE H2 DEPLETED TANKS</u> Note all H2 tanks with Qty &lt; 3% Then annotate DEORBIT BURN FLIGHT RULES, ELEC section (step 8) for depleted tanks (ENT, <u>BURN CARDS</u>)</p> <p><u>SPECIALIST SEAT INSTALLATION</u></p>	<div style="border: 1px solid black; padding: 5px;"> <p><u>CRT TIMER SETUP</u> [ 1 ]</p> <p>1: GNC 2 TIME <u>SET CRT TIMER TO COUNT DOWN TO TIG</u> (perform for GNC &amp; SM)</p> <p>ENTRY DAY (HR:MIN:SEC – MET)</p> <p>ITEM 17 + <input type="text"/> <input type="text"/> + <input type="text"/> <input type="text"/> + <input type="text"/> <input type="text"/></p> <p>24 HR LATE DELAYED DEORBIT</p> <p>ITEM 17 + <input type="text"/> <input type="text"/> + <input type="text"/> <input type="text"/> + <input type="text"/> <input type="text"/></p> <p>1: GNC UNIV PTG</p> </div> <div style="border: 1px solid black; padding: 5px; margin-top: 10px;"> <p><u>COLDSOAK INITIATE</u> [ 2 ]</p> <p>C L1 <u>FES CONFIG</u> FLASH EVAP CNTLR PRI A,B, SEC (three) – OFF RAD CNTLR OUT TEMP – HI When FREON EVAP OUT TEMP &gt; 50 degF, FLASH EVAP CNTLR PRI B(A) – ON HI LOAD DUCT HTR – B</p> <p><u>H2O LOOP C/O AND CONFIG</u> <u>SM 88 APU/ENVIRON THERM</u></p> <p><u>NOTE</u> INCR decreases ICH FLOW</p> <p>L1 H2O LOOP 2 BYP MODE – MAN MAN – INCR or DECR (adjust until ICH FLOW ~950 ± 50)</p> <p>If first Deorbit Prep:</p> <p>L1 H2O PUMP LOOP 1 – ON √LOOP 1 BYP MODE – MAN MAN – DECR (hold 5 sec)</p> <p>CRT √H2O LOOP 1 ICH FLOW – increasing</p> <p>L1 H2O LOOP 1 BYP MAN – INCR (Adjust until ICH FLOW ~950 ± 50) H2O PUMP LOOP 1 (two) – OFF,B</p> </div>	

HYD/MPS CONFIG 5

W/B STEAM VENT HTR ACT

R2           √BLR CNTLR/HTR (three) – B  
                   PWR (three)           – ON

NOTE

HTR reqd to be on 2 hr prior to APU act

HYD CIRC PUMP TERM

R2           HYD CIRC PUMP (three) – OFF

SSME HYD REPRESS PREP

C3           √FCS CH (four) – AUTO  
 O17          ATVC (four)       – ON

DED DISP ENT CONFIG 6

O14,          RGA (four)           – ON  
 O15,          cb MNA,B,C ADTA (four) – cl  
 O16          MNA,B ACCEL 1, 2 (two) – cl  
                   DDU L (two)       – cl  
                   √MNA, C DDU AFT (two) – op  
                   MNB, C DDU R (two) – cl  
                   ASA (four)           – ON  
 MDU          ACCEL 4,3 (two)       – ON  
                   AFD1                 – OFF

O7            If OV105:  
                   GPS 1,3 PRE AMPL (four) – ON  
                   GPS 1,3 PWR (two) – ON  
                   Wait at least 30 sec  
                   GNC I/O RESET  
                   1: GNC 55 GPS STATUS  
                   √NAV – ITEM 17,19 EXEC (\*)  
                   INIT – ITEM 14,16 EXEC (\*)  
                   √MODE – INIT  
                   NAV – ITEM 17,19 EXEC (\*)  
                   √MODE – INS  
                   If OV103,4:  
                   TACAN MODE (three) – GPC  
                   ANT SEL (three) – AUTO

O8            RADAR ALTM (two) – ON  
                   MLS (three)       – ON  
                   CH tw (three) – See DEL PAD (ENT), PRPLT/DEL PADS

F3            TRIM PNL (two)       – ON

**TIG**  
**-03:30**  
A5(B1)  
AUTO  
VERN  
RT 0.2  
DB 1.0

**-03:25** C,P      **1: GNC 0 GPC MEMORY**      **2: BFS, GNC 0 BFS MEMORY**

If single G2: **DPS CONFIG FOR D/O PREP** **4a**

**ENSURE BFS GPC CAN COMMAND AN IDP** **4b**

**HYD/MPS CONFIG** **5**, 1-8

**-03:20**

**-03:15**      **DED DISP ENT CONFIG** **6**, 1-8

**NOTE**  
√MCC for unaccounted-for sw or  
cb config discrepancies

**-03:10** C  
P  
MS

**PARTIAL ENT SWITCH LIST/VERIF** (FWD), 3-4 thru 3-6  
**PARTIAL ENT SWITCH LIST/VERIF** (FWD), 3-7 and 3-8  
**PARTIAL ENT SWITCH LIST/VERIF** (AFT), 3-9  
**PARTIAL ENT SWITCH LIST/VERIF** (MID), 3-10 thru 3-12

**-03:05**

**-03:00**

**DPS CONFIG FOR D/O PREP** **4a**

**NOTE**  
No keyboard entries or sw throws 10 sec:  
Before and after moding PASS GPCs to RUN  
Before OPS transition or set expansion/contraction  
requests until new OPS base page is displayed

**ACTIVATE GPC 2** (if in HALT)  
Remove and stow GPC Mode Switch Guard

P/I Locker

O6      √GPC MODE 2 – HALT (tb-bp)  
          √OUTPUT 2 – NORM  
          √PWR 2 – ON  
          MODE 2 – STBY (tb-RUN),  
                  RUN

CONFIG GPC	2	12000
STR 1	1	1
2	2	2
3	1	1
4	2	2
PL 1/2	0	0
CRT 1	1	1
2	2	2
3	0	0
4	2	2
L 1	0	0
2	0	0
MM 1	1	1
2	2	2

**TRANSITION GPCs 1 & 2 TO OPS 2**  
(if GPC 2 just activated)

**1: GNC 0 GPC MEMORY**  
CONFIG – ITEM 1 +2 EXEC  
Modify MC 2 per table →  
GNC, OPS 201 PRO

**1: GNC 22 S TRK/COAS CNTL**  
S TRK -Y,-Z: STAR TRK – ITEM 3,4 EXEC

**1: GNC 21 IMU ALIGN**  
RESUME


**ENSURE BFS GPC CAN COMMAND AN IDP** **4b**

O6      √GPC PWR 5 – ON  
          MODE 5 – STBY (tb-RUN)

C3      BFC CRT DISP – ON  
          SEL – 2+3

C3      **2: BFS, GNC BFS MEMORY or SM THERMAL**  
          BFC CRT DISP – OFF  
          SEL – 3+1

Block  deleted

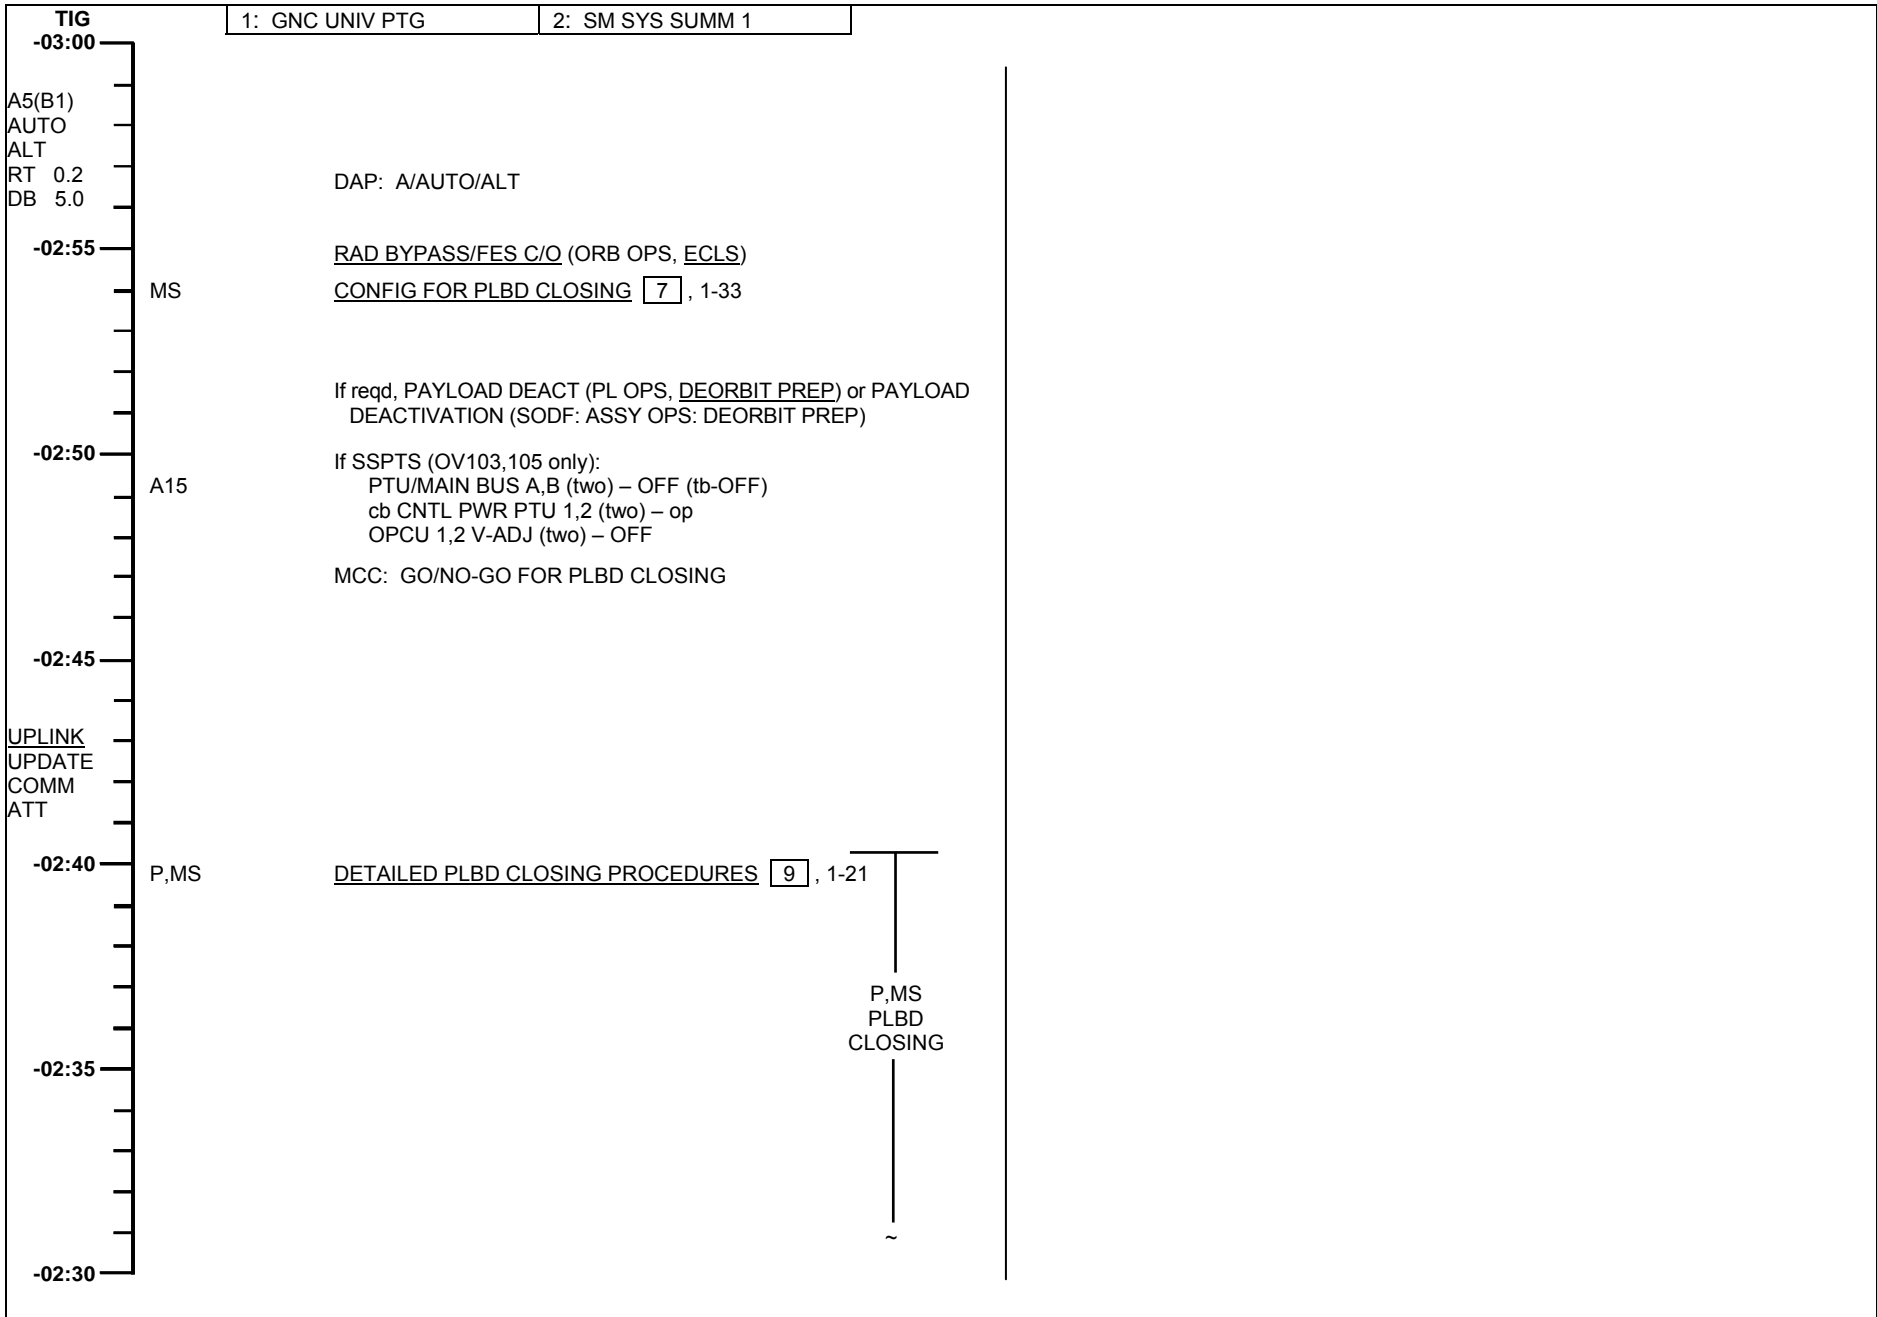

DPS ENTRY CONFIG 12

\* If IMU or RHC dilemma, do not proceed with OPS 3 transition \*

√Att mnvr complete  
 √RGA,AA,ASA,IMU (all) – ON

NOTE


No keyboard entries or sw throws 10 sec:  
 Before and after moding PASS GPCs to RUN  
 Before OPS transition or set expansion/contraction requests until new OPS base page is displayed

1. MEDS CONFIG  
 C2 IDP/CRT 3 PWR – ON  
 CRTX GPC/CRT 2/3 EXEC  
 F6,F7,F8 √All forward MDUs ON and selected to primary port
2. VERIFY GPC CONFIG  
 O6 √GPC MODE 3 – HALT (tb-bp)  
 √PWR 3 – ON  
 √OUTPUT 1,2 – NORM (tb-gray)  
     √3,5 – NORM (tb-bp)  
     √4 – TERM (tb-bp)  
 √MODE 1,2,4 – RUN (tb-RUN)  
     3 – STBY (tb-RUN)  
     √5 – STBY (tb-RUN)
3. SM CHECKPOINT/UL CNTL ENA  
     1: SM 60 SM TABLE MAINT  
     2: SM 1 DPS UTILITY  
 CRT2 MMU ASSIGN 2 SM – ITEM 4 EXEC  
 CRT1 CKPT INITIATE – ITEM 18 EXEC  
 √Update of CKPT TIME and STATUS GOOD indicated  
 CRT2 MMU ASSIGN 1 SM – ITEM 3 EXEC  
 CRT1 CKPT INITIATE – ITEM 18 EXEC  
 √Update of CKPT TIME and STATUS GOOD indicated  
 CRT2 CKPT RETRV ENA – ITEM 12 EXEC (\*)  
     UL CNTL ENA – ITEM 36 EXEC
4. LOAD ENTRY TFL/RECONFIG UPLK  
 Perform LOAD PDI DECOM FORMAT and LOAD PCMMU FORMAT for entry config (ORB OPS FS, COMM/INST)
- C2 Set event timer to count down to TIG
5. TRANSITION GPC 1&2 TO GNC OPS 3  
     1: GNC 0 GPC MEMORY  
     CONFIG – ITEM 1 +3 EXEC

6. TRANSITION BFS GPC TO GNC OPS 3  
 C3 BFC CRT DISP – ON  
     √SEL = 3+1  
     3: BFS, GNC BFS MEMORY  
 O6 GPC OUTPUT 5 – B/U (tb-bp)  
 CRT3 √TFL ENA – ITEM 29 (\*)  
     BFS, GNC OPS 301 PRO  
     3: BFS, GNC DEORB MNVR COAST
7. TRANSITION GPC 1,2,3,4 TO GNC OPS 3  
 O6 SM, OPS 000 PRO  
     X: SM GPC MEMORY  
     GPC OUTPUT 4 – NORM (tb-gray)  
     MODE 3,5 (two) – RUN (tb-RUN)  
     If no comm, sel best antenna  
     1: GNC 0 GPC MEMORY  
     √CONFIG – ITEM 1 +3 EXEC  
     Modify MC 3 per table  
     GNC OPS 301 PRO  
     1: GNC DEORB MNVR COAST  
 CRT3 BFS, GNC OPS 000 PRO  
 C3 BFS, GNC OPS 301 PRO  
     BFC CRT DISP – OFF  
     (GPC 3 commanding IDP 3)  
     BFC CRT DISP – ON  
     \* If any IMU failed or not aligned:  
     \* 3: BFS, GNC 51 OVERRIDE \*  
     \* Aff IMU – desel \*
8. MNVR BACK TO COMM ATT

CONFIG GPC	3
STR 1	1
2	2
3	1
4	2
PL 1/2	0
CRT 1	1
2	2
3	2
4	0
L 1	0
2	0
MM 1	1
2	2

CONFIG GPC	3
STR 1	1
2	2
3	3
4	4
PL 1/2	1
CRT 1	1
2	2
3	3
4	0
L 1	0
2	0
MM 1	1
2	2

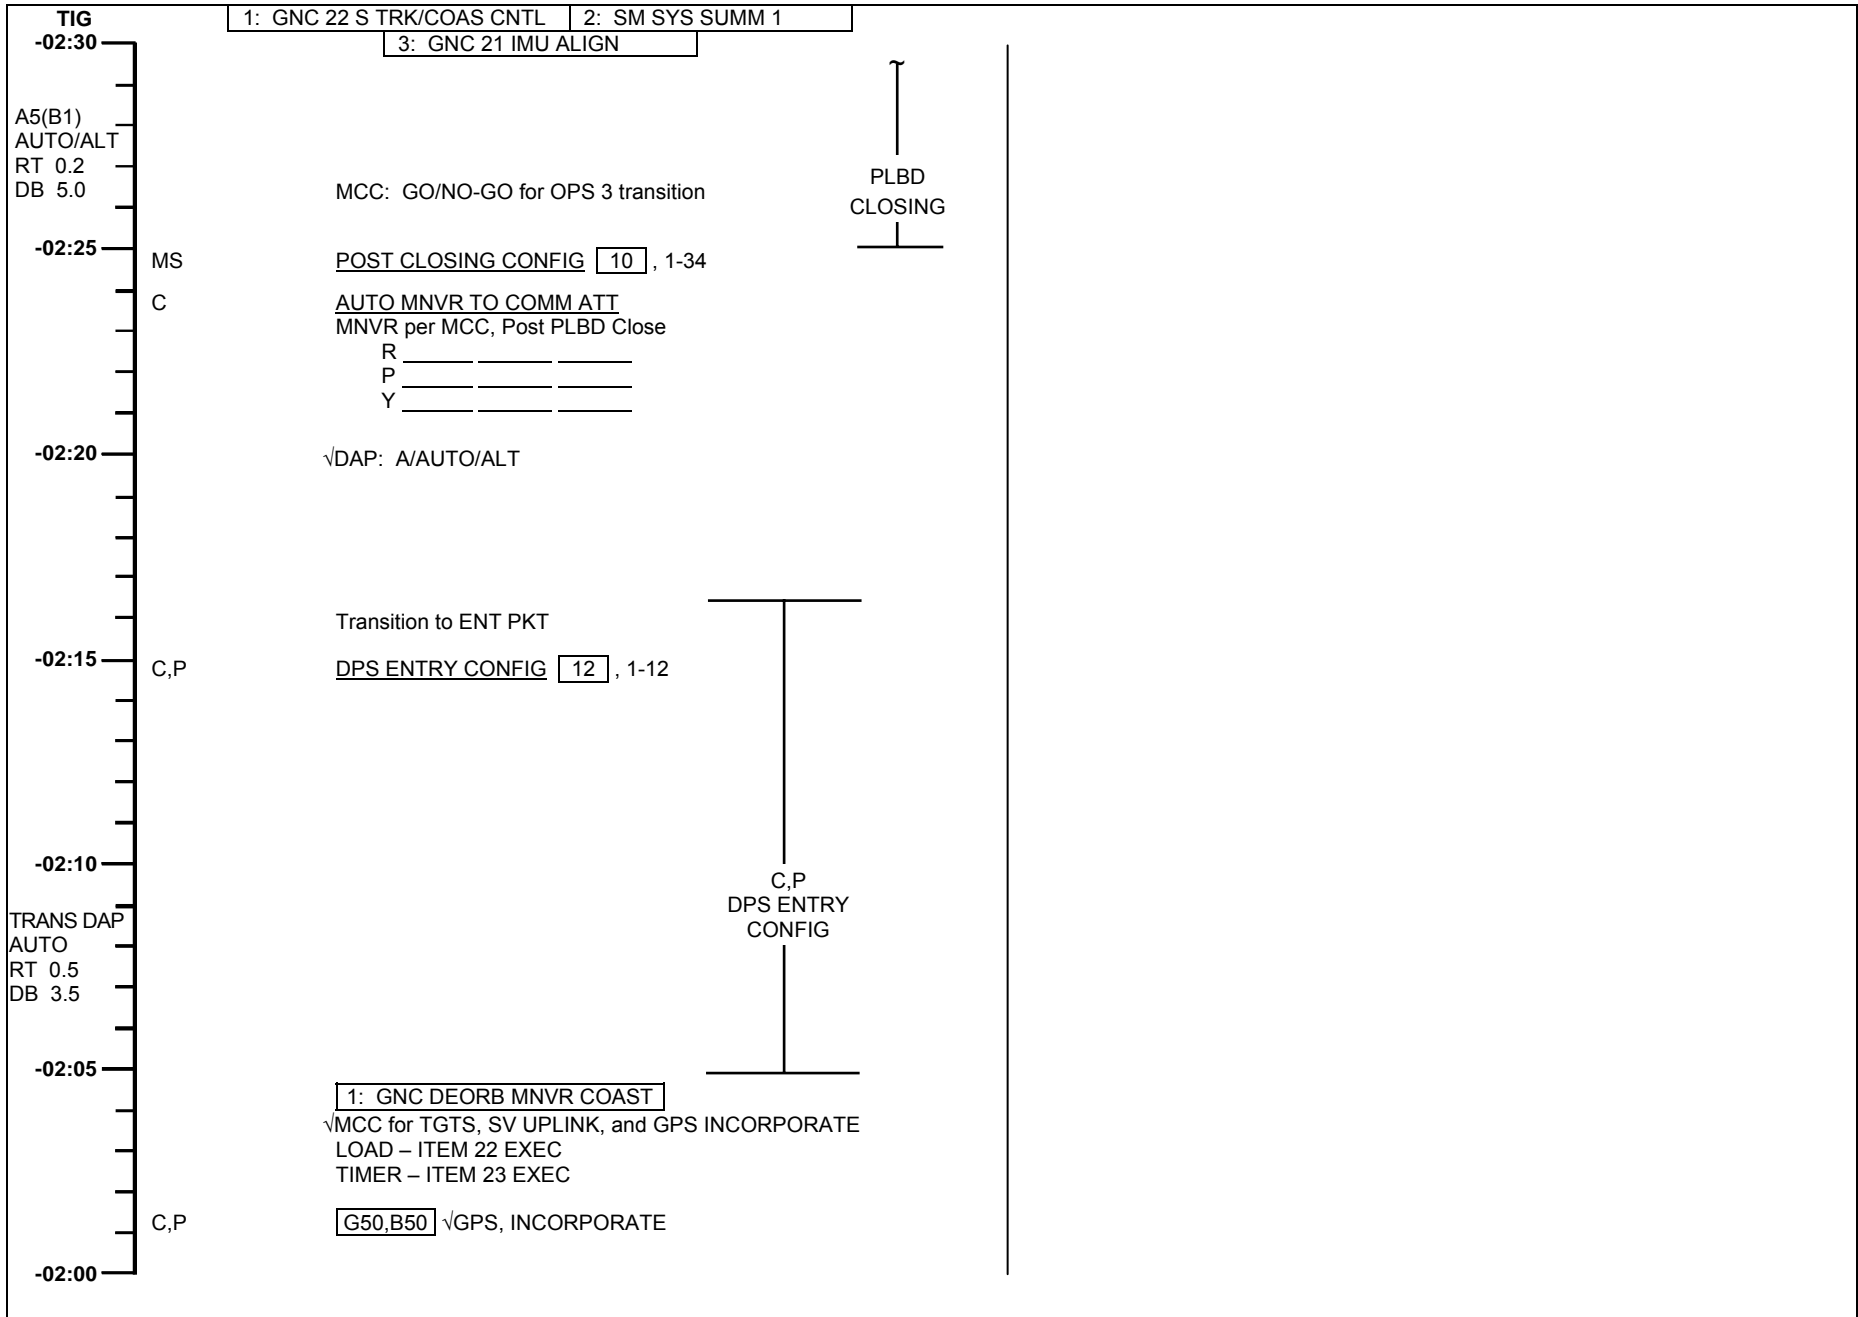

DEORB PAD UPDATE 17

MCC update:

OMS PRPLT PAD, DEL PAD (ENT, PRPLT/DEL PADS) and DEORBIT  
MNVR PAD (ENT, MNVR PADS)

\* If MCC cannot provide DEORB TGT, use Deorbit Manager on PGSC \*

LANDING SITE UPDATE

1: GNC 50 HORIZ SIT

SEL SITE see DEL PAD (ENT, PRPLT/DEL PADS)

CHECK TGTs

1: GNC DEORB MNVR COAST

√PASS and BFS TGT per DEORBIT MNVR PAD (ENT, MNVR PADS)


√PASS and BFS solution per DEORBIT MNVR PAD (ENT, MNVR PADS)

BURN ATT, HA HP


$\Delta$ VTOT

TGO



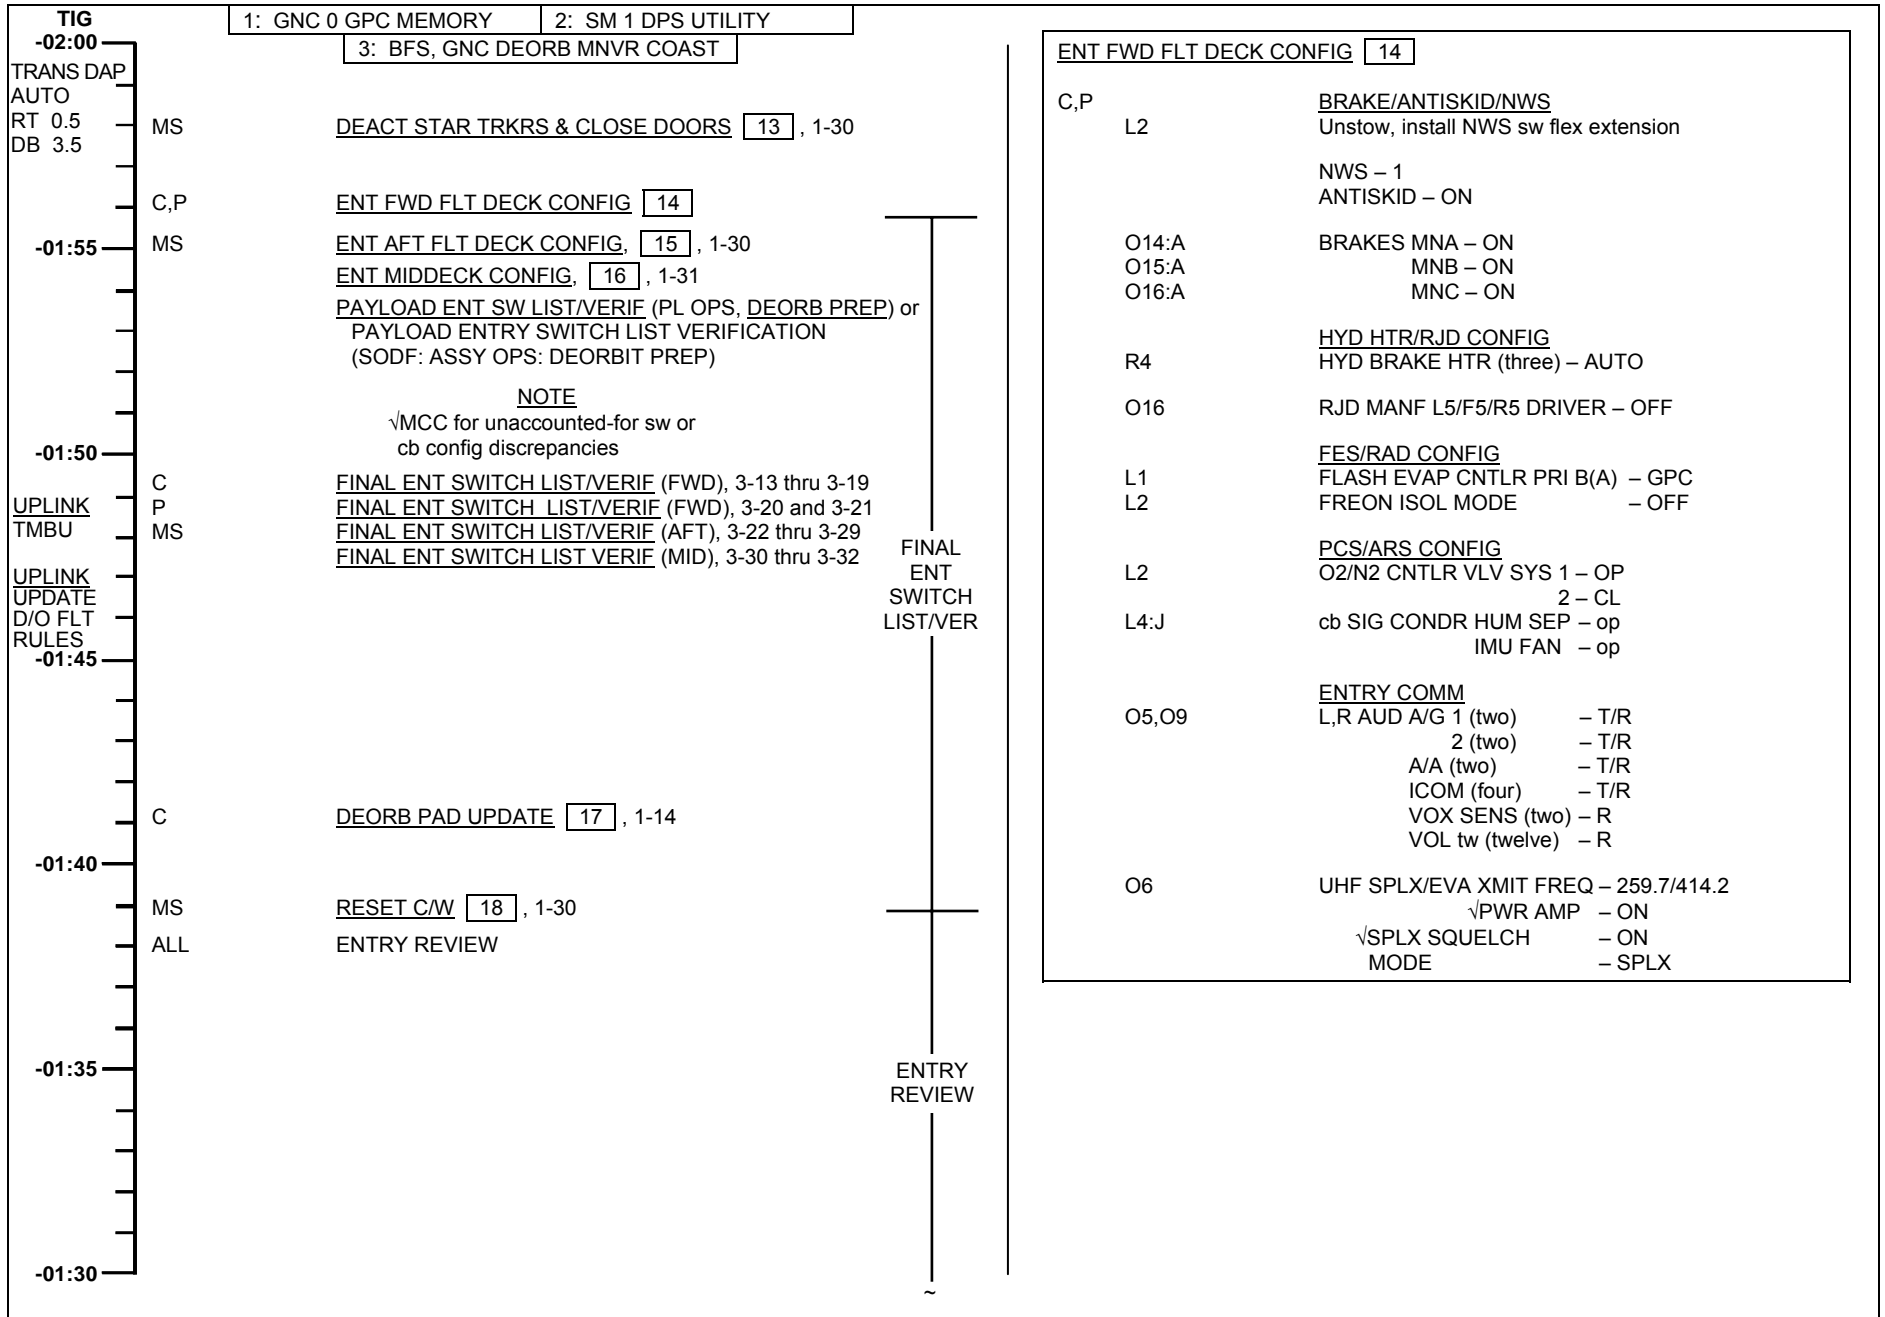

This Page Intentionally Blank

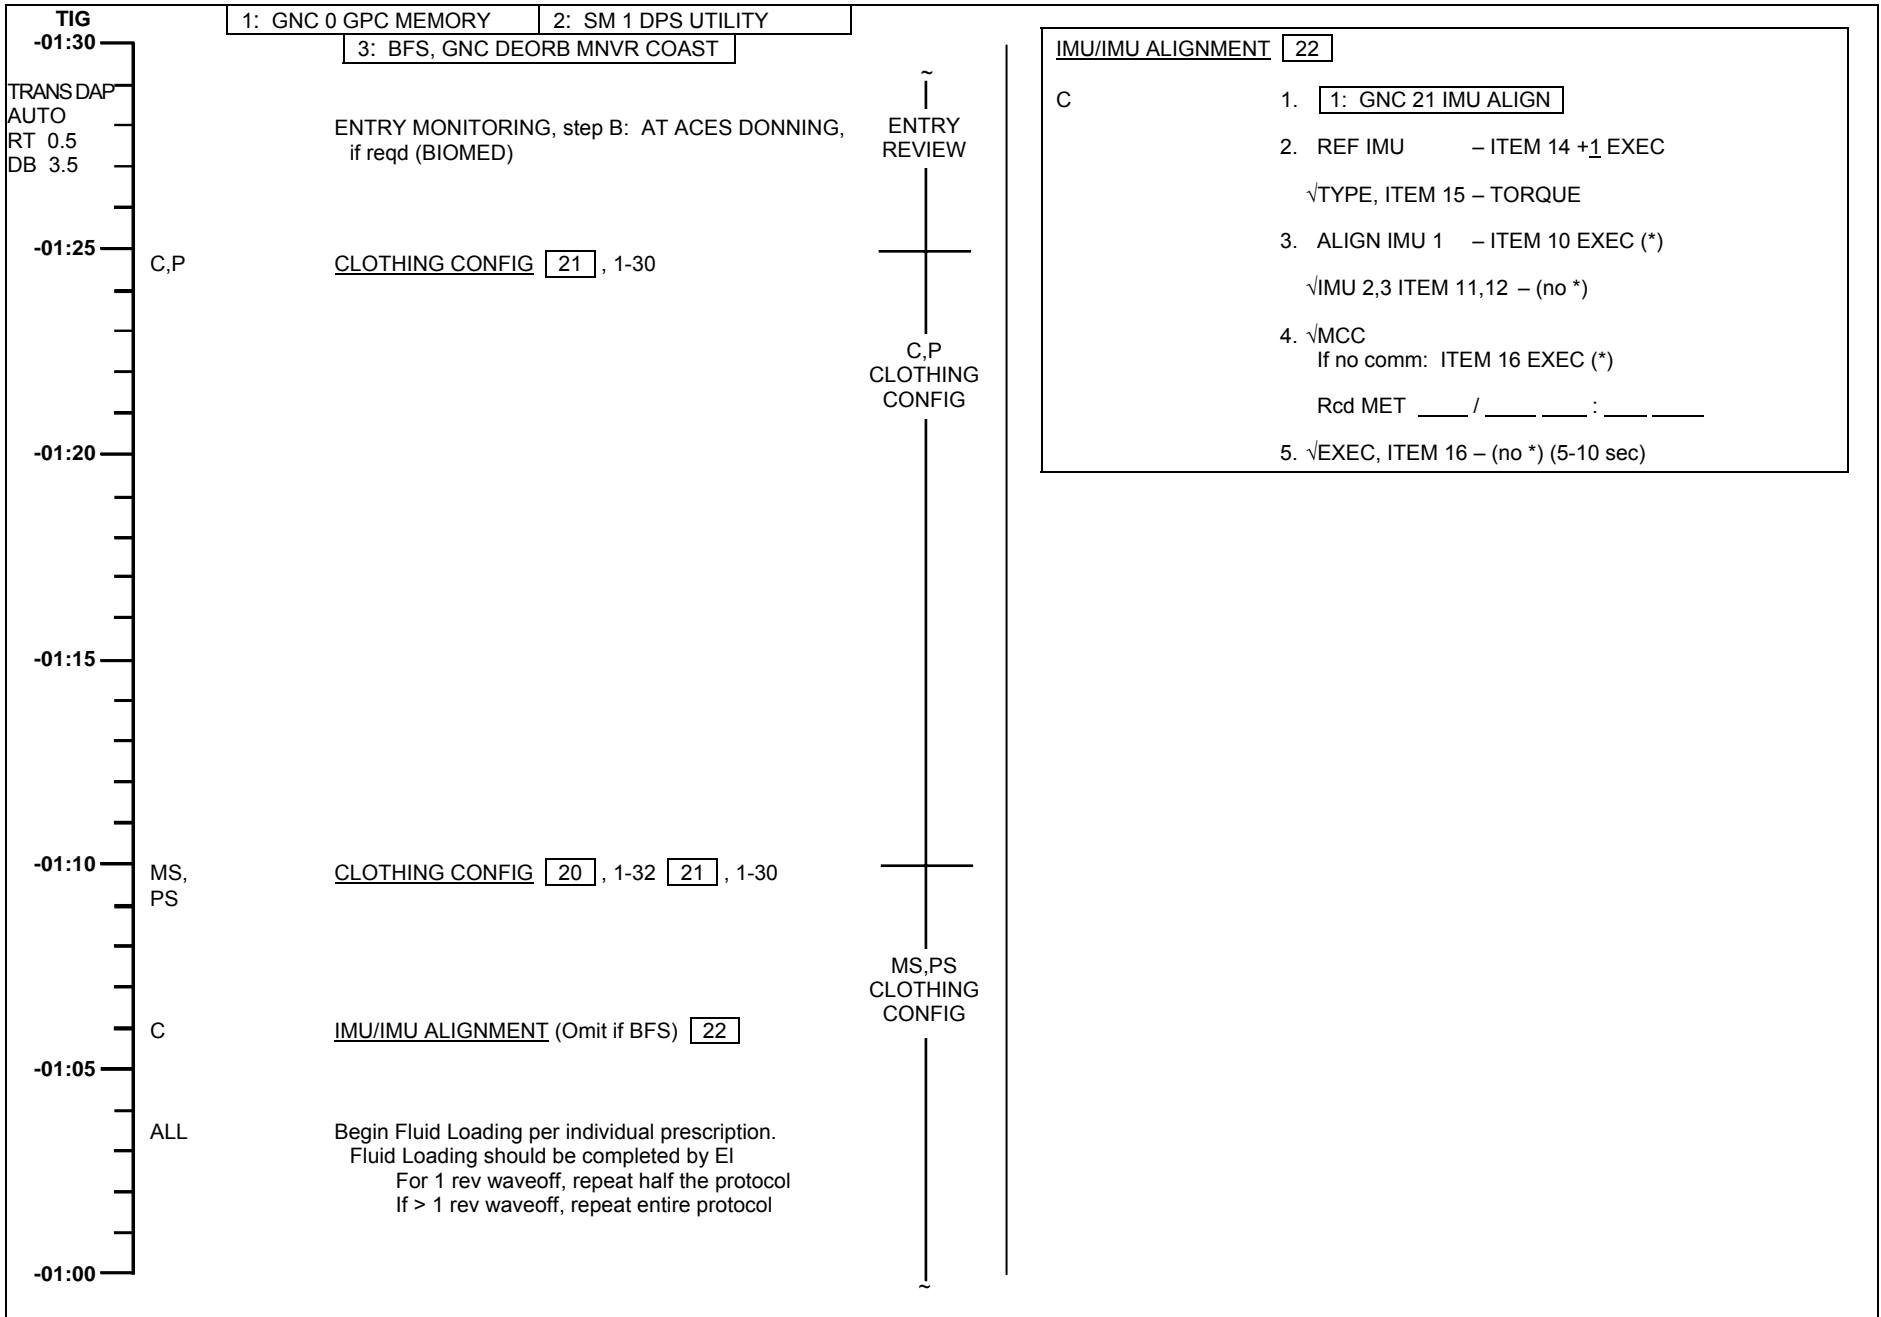

This Page Intentionally Blank

<b>TIG</b>		1: GNC DEORB MNVR COAST	2: GNC DEORB MNVR COAST	
-01:00		3: BFS, GNC DEORB MNVR COAST		
TRANS DAP	C,P	SEATS	CDR SEAT PWR BUS SEL – AC2 (up)	MS,PS CLOTHING CONFIG
AUTO			PLT SEAT PWR BUS SEL – AC3 (dn)	
RT 0.5	C,P		<u>SEAT INGRESS</u>	
DB 3.5	C,P		<u>HUD SETUP</u> [23]	
	C,P		Adjust seat	
			Exercise brake pedals	
-00:55	C	C6	LEH O2 vlv (four) – OP	
	C,P		<u>ACES PRESS INTEGRITY CHECK</u>	
	MS		Dual Suit Controller, Dial-To-Test Knob – full cw	
	MS		<u>AFD AUD SPKR CONFIG</u> [28], 1-29	
			<u>WIRELESS STOW</u> , if flown [24]	
-00:50				
	C,P		Stow all unnecessary FDF articles	
			FLIGHT DECK, go to ENT, <u>DEORBIT BURN</u>	
-00:45				
-00:40				
-00:35	MS		<u>GALLEY DEACT</u> [26], 1-31	
			<u>NOTE</u>	
			WCS must be deactivated prior to EI	
	MS		<u>WCS DEACT MS</u> [27], 1-32	
	MS		<u>MD AUD SPKR CONFIG</u> [29], 1-32	
-00:30				

HUD SETUP [23]

Remove, stow HUD Covers (two)  
Ensure Cloth Cover does not obscure light sensor

WIRELESS STOW, if flown [24]

Disconnect, stow Wireless Comm (if reqd)  
√Aft deck lts as reqd

This Page Intentionally Blank

# AUTO PLBD CLOSING

## DETAILED PLBD CLOSING PROCEDURES 9

### CAUTION

Verify no obstructions before closing and latching PLBD (Ku ANT,RMS,RAD,etc)

Use MANUAL mode for subsequent BFS PLBD ops if BFS AUTO sequence has been interrupted by reversing latch/door drive direction or if MANUAL mode has already been used during mission

- R13L
- \* If no motion determined visually or 'OP/CL' \*
  - \* not blank within 10 sec after cmd: \*
  - \* PL BAY DR – STOP \*
  - \* Perform MAL, MECH, 9.1a \*
  - \* If Latch not 'CL' in single-motor time: \*
  - \* PL BAY DR – STOP \*
  - \* Perform MAL, MECH, 9.1e \*
  - \* If door motion stops and not 'RDY' or 'CL': \*
  - \* PL BAY DR – STOP \*
  - \* Perform MAL, MECH, 9.1g \*

- \* If SM GPC fails during this operation: \*
- \* PL BAY DR SYS (two) – DSBL \*
- \* DR – STOP \*
- \* Perform PASS SM GPC FAIL (ORB PKT, DPS) \*

### NOTE

Note any single-motor operations (continue ops)  
(single-motor times = 2x listed dual-motor times)

### RECORD MUXED PORT RAD RETRACT HOSE VIEWS (A and C)

- L10 (VTR)
1. √Muxed scene displayed on VTR LCD  
REC pb – push, hold  
PLAY pb – push  
√Red dot displayed on LCD

### CONFIGURE FOR AUTO MODE

- CRT4
2. SM, OPS 202 PRO or BFS, SM 63 PL BAY DOORS

### 4: SM PL BAY DOORS

- R13L
- CRT4
- √PL BAY DR – STOP
  - √PBD SW – STOP
  - √MAN SEL (ten) – (no \*)
  - √PBD SW BYPASS – (no\*)
3. AC POWER ON – ITEM 1 EXEC (\*)
  4. AUTO MODE SEL – ITEM 3 EXEC (\*)
- R13L
- CRT4
5. PL BAY DR SYS (two) – ENA
  - √OP/CL STATUS (ten) – OP

### CLOSE PLBDs USING AUTO MODE

- R13L
6. PL BAY DR – CL
- CRT4
- \* If PORT DOOR not 'CL' within 6 sec of 'RDY': \*
  - \* PL BAY DR – STOP \*
  - \* Go to PORT BKHD LATCH TROUBLESHOOTING \*
  - \* (AUTO MODE) 9A, 1-23 \*

- CRT4
- √PORT DOOR – blank,RDY,CL (~63 sec)

### RECORD MUXED STBD RAD RETRACT HOSE VIEWS (D and B)

- A7
7. VID IN MUX 2 pb – push
- L10 (VTR)
- √Muxed scene displayed on VTR LCD
- CRT4
- √PORT FWD, AFT LATCHES – blank, CL (~30 sec)
  - √STBD DOOR – blank

8. When Stbd Door as close as possible to Port Door before contact, perform PLBD fit check:

- R13L
- PL BAY DR – STOP
  - Determine C/L Latch clearance on C/L LATCH EXTENDED GUIDE ROLLER TRAJECTORY NO-GO DIAGRAM, 1-22

- \* If NO-GO for PLBD CLOSE: \*
- \* If no waveoff capability: \*
- \* Perform MAL, MECH, SSR-3 (SIMULTANEOUS \*
- \* PLBD CL) \*
- \* If waveoff OK: \*
- \* √MCC \*

9. PL BAY DR – CL

- CRT4
- \* If STBD DOOR not 'CL' within ~6 sec of 'RDY': \*
  - \* PL BAY DR – STOP \*
  - \* Go to STBD BKHD LATCH TROUBLESHOOTING \*
  - \* (AUTO MODE) 9B, 1-23 \*
- R13L

- CRT4
- √STBD DOOR – CL (~63 sec)
  - √FWD,AFT LATCHES (two) – blank,CL (~30 sec)
  - √CENTER LATCHES 1-4,13-16 (two) – blank,CL (~20 sec)
  - √5-8, 9-12 (two) – blank,CL (~20 sec)

- R13L
10. PL BAY DR – STOP

### POST-PLBD CLOSING CLEANUP


- CRT4
11. PL BAY DR SYS (two) – DSBL
  - √OP/CL STATUS (ten) – CL
  12. AC POWER OFF – ITEM 2 EXEC (\*)
  13. GPC/CRT 54 EXEC

### MARK AND STOW RAD RETRACT HOSE RECORDING

- L10 (VTR)
14. STOP pb – push, Eject tape, mark as PLBD Closure, stow in RTH bag (L10A1 foam)


# AUTO PLBD CLOSING (Cont)

## PORT AFT BULKHEAD LATCH GO/NO-GO DIAGRAM

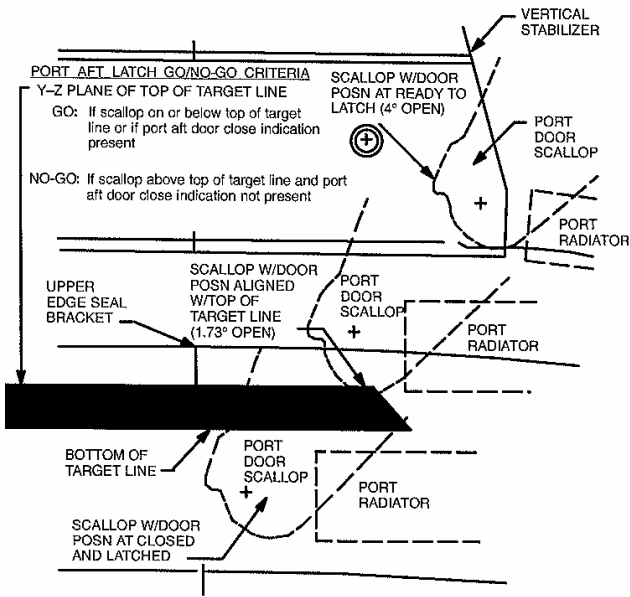

FUNCTION	PLBD CONTROL								PLBD DISPLAY PL MDM								
	Ref: MA73C:C&D for MCA (cb)																
	MTR 1				MTR 2				C	C	O	O	C	R	R	R	O
	AC/MCA	CNTL	MDM	SYS	AC/MCA	CNTL	MDM	SYS	A	B	A	B	A	B	C		
LATCH																	
5-8	1/MID3	AB3/AB2	PL1	2	3/MID2	CA3/CA1	PL2	1	1	2	1	2					
9-12	1/MID1	AB3/AB1	PL1	1	3/MID4	CA3/CA2	PL2	2	1	2	1	2					
1-4	1/MID3	AB3/AB2	PL1	2	3/MID2	CA3/CA1	PL2	1	1	2	1	2					
13-16	3/MID4	CA3/CA2	PL2	2	2/MID2	BC3/BC1	PL1	1	2	1	2	1					
S FWD	1/MID1	AB3/AB1	PL1	1	2/MID4	BC3/BC2	PL2	2	1	2	1	2					
S AFT	3/MID4	CA3/CA2	PL2	2	2/MID2	BC3/BC1	PL1	1	2	1	2	1					
S DOOR	1/MID1	AB3/AB1	PL1	1	2/MID4	BC3/BC2	PL2	2					1	1	2	2	1
													2	1	2	2	2
P FWD	1/MID1	AB3/AB1	PL1	1	2/MID4	BC3/BC2	PL2	2	1	2	1	2					
P AFT	1/MID3	AB3/AB2	PL1	2	3/MID2	CA3/CA1	PL2	1	1	2	1	2					
P DOOR	3/MID4	CA3/CA2	PL2	2	2/MID2	BC3/BC1	PL1	1					2	1	1	2	2
													1	1	1	2	1

## C/L LATCH EXTENDED GUIDE ROLLER TRAJECTORY NO-GO DIAGRAM

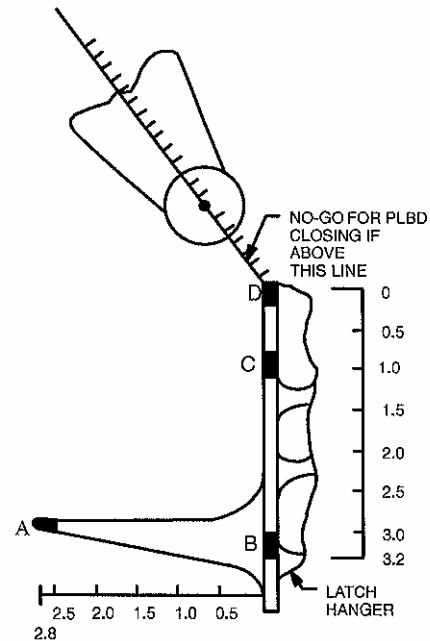



PORT BKHD LATCH TROUBLESHOOTING (AUTO MODE) [9A]

- CRT4 1. √PORT DOOR FWD, AFT MICRO-SW STATs  
 If PORT DOOR AFT 'C' = '0':  
 : 2. √PORT AFT BULKHEAD LATCH GO/NO DIAGRAM, 1-22  
 : If NO-GO:  
 L Go to MAL, MECH, SSR-2 (CONTINGENCY PLBD CLOSURE)
- If PORT DOOR FWD 'C' = '0':  
 :  
 : NOTE  
 : Use PLB camera A to view port fwd bkhd latch  
 : hook/roller #3 as seen in figures 1-1 and 1-2, 1-24
- R13L 3. PL BAY DR SYS 1 – DSBL  
 :  
 : During the following step, monitor latch hook #3 while driving to  
 : ensure hook motion and proper roller engagement  
 :  
 : \* If latch hook #3 stops moving while commanded, or \*  
 : \* it appears that the hook is going to miss or jam \*  
 : \* into its roller: \*  
 : \* PL BAY DR – STOP \*  
 : \* Go to MAL, MECH, SSR-2 (CONTINGENCY \*  
 : \* PLBD CLOSURE) \*
4. PL BAY DR – CL  
 :  
 : 5. When proper roller engagement verified for latch #3:  
 L PL BAY DR – STOP  
 SYS 1 – ENA
6. Go to step 6 of AUTO PLBD CLOSING [9], 1-21 ignoring the starred  
 block

STBD BKHD LATCH TROUBLESHOOTING (AUTO MODE) [9B]

- CRT4 1. √STBD DOOR FWD, AFT MICRO-SW STATs  
 If STBD DOOR AFT (FWD) 'C' = '0':  
 :  
 : NOTE  
 : Use PLB camera C(D) to view stbd aft (fwd) bkhd latch  
 : hook/roller #3 as seen in figures 1-1 and 1-2, 1-24
- R13L 2. PL BAY DR SYS 1(2) – DSBL  
 :  
 : During the following step, monitor latch hook #3 while driving to  
 : ensure hook motion and proper roller engagement  
 :  
 : \* If at any point latch hook #3 stops moving while \*  
 : \* commanded, or it appears that the hook is going \*  
 : \* to miss or jam into its roller: \*  
 : \* PL BAY DR – STOP \*  
 : \* Go to MAL, MECH, SSR-2 (CONTINGENCY \*  
 : \* PLBD CLOSURE) \*
3. PL BAY DR – CL  
 :  
 : 4. When proper roller engagement verified for latch #3:  
 : PL BAY DR – STOP  
 L SYS 1(2) – ENA
5. Go to step 9 of AUTO PLBD CLOSING [9], 1-21 ignoring the starred  
 block

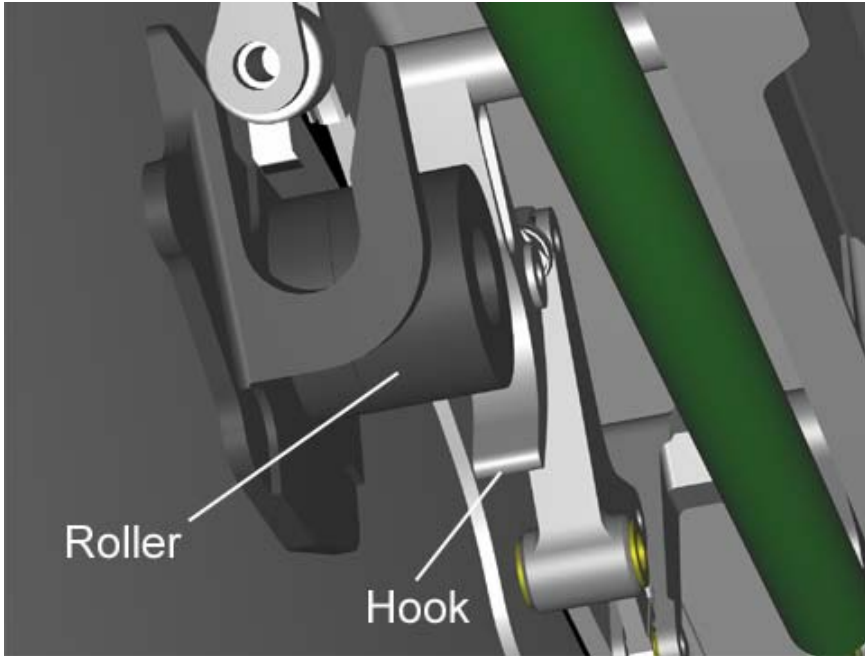


Figure 1-1.- Latch hook/roller #3 typical view from PLB camera

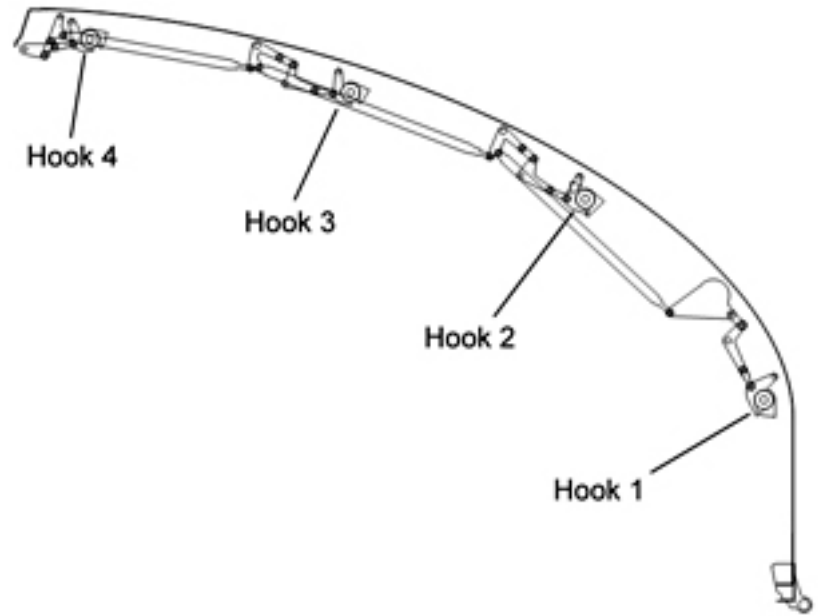


Figure 1-2.- Typical latch hook/roller numbering

# MANUAL PLBD CLOSING

## DETAILED PLBD CLOSING PROCEDURES

### CAUTION

Verify no obstructions before closing and latching PLBD (Ku ANT,RMS,RAD,etc)

Use MANUAL mode for subsequent BFS PLBD ops if BFS AUTO sequence has been interrupted by reversing latch/door drive direction or if MANUAL mode has already been used during mission

- R13L
- \* If no motion determined visually or 'OP/CL' \*
  - \* not blank within 10 sec after cmd: \*
  - \* PL BAY DR – STOP \*
  - \* Go to MAL, MECH, 9.1a \*
  - \* If Latch not 'CL' in single-motor time: \*
  - \* PL BAY DR – STOP \*
  - \* Go to MAL, MECH, 9.1e \*
  - \* If door motion stops and not 'RDY' or 'CL': \*
  - \* PL BAY DR – STOP \*
  - \* Go to MAL, MECH, 9.1g \*
  - \* If SM GPC fails during this operation: \*
  - \* PL BAY DR SYS (two) – DSBL \*
  - \* DR – STOP \*
  - \* Go to PASS SM GPC FAIL (ORB PKT, DPS) \*

### NOTE


Note any single-motor operations (continue ops) (single-motor times = 2x listed dual-motor times)

- L10 (VTR) 1. RECORD MUXED PORT RAD RETRACT HOSE VIEWS (A and C)  
 √Muxed scene displayed on VTR LCD  
 REC pb – push, hold  
 PLAY pb – push  
 √Red dot displayed on LCD
- CRT4 2. CONFIGURE FOR MANUAL MODE  
 SM, OPS 202 PRO or BFS, SM 63 PL BAY DOORS  
4: SM PL BAY DOORS
- R13L √PL BAY DR – STOP  
 CRT4 √PBD SW – STOP  
 √MAN SEL (ten) – (no \*)  
 √PBD SW BYPASS – (no \*)
3. AC POWER ON – ITEM 1 EXEC (\*)  
 √AUTO MODE SEL – (no \*)
- R13L 4. PL BAY DR SYS (two) – ENA  
 CRT4 √OP/CL STATUS (ten) – OP
- CLOSE PORT DOOR, FWD & AFT LATCHES  
 CRT4 5. Select PORT DOOR – ITEM 13 EXEC (\*)  
 R13L 6. PL BAY DR – CL
- CRT4 \* If PORT DOOR not 'CL' within 6 sec of 'RDY': \*  
 R13L \* PL BAY DR – STOP \*  
 \* Go to PORT BKHD LATCH TROUBLESHOOTING \*  
 \* (MANUAL MODE) 9C, 1-27 \*
- CRT4 √PORT DOOR – blank,RDY,CL (~63 sec)  
 R13L 7. PL BAY DR – STOP

- CRT4 8. Select PORT FWD,AFT LATCHES – ITEM 11, 12 EXEC (\*)  
 R13L 9. PL BAY DR – CL  
 CRT4 √PORT DOOR – CL  
 √FWD,AFT LATCHES (two) – blank, CL (~30 sec)
- R13L 10. PL BAY DR – STOP  
 CRT4 11. Deselect PORT FWD,AFT LATCHES, & DOOR – ITEM 11,12,13 EXEC (no \*)  
RECORD MUXED STBD RAD RETRACT HOSE VIEWS (D and B)
- A7 12. VID IN MUX 2 pb – push  
 L10 (VTR) √Muxed scene displayed on VTR LCD  
CLOSE STBD DOOR, FWD & AFT LATCHES
- R13L 13. Select STBD DOOR – ITEM 10 EXEC (\*)  
 CRT4 14. PL BAY DR – CL  
 √STBD DOOR – blank
15. When Stbd Door as close as possible to Port Door before contact, perform fit check:  
 PL BAY DR – STOP  
 Determine C/L Latch clearance on C/L LATCH EXTENDED GUIDE ROLLER TRAJECTORY NO-GO DIAGRAM, 1-26  
 \* If NO-GO for PLBD CLOSE: \*  
 \* If no waveoff capability: \*  
 \* | Go to MAL, MECH SSR-3 (SIMULTANEOUS PLBD CL) \*  
 \* If waveoff OK: \*  
 \* √MCC \*
16. PL BAY DR – CL  
 \* If STBD DOOR not 'CL' within 6 sec of 'RDY': \*  
 \* PL BAY DOOR – STOP \*  
 \* Go to STBD BKHD LATCH TROUBLESHOOTING \*  
 \* (MANUAL MODE) 9D, 1-27 \*
- CRT4 √STBD DOOR – RDY,CL (~63 sec)  
 R13L 17. PL BAY DR – STOP  
 CRT4 18. Select STBD FWD,AFT LATCHES – ITEM 8,9 EXEC (\*)  
 R13L 19. PL BAY DR – CL  
 CRT4 √STBD DR – CL  
 √FWD AFT LATCHES (two) – blank, CL (~30 sec)
- R13L 20. PL BAY DR – STOP  
 CRT4 21. Deselect STBD FWD,AFT LATCHES & DOOR – ITEM 8,9,10 EXEC (no \*)  
CLOSE C/L LATCHES
- R13L 22. Select CENTER LATCHES 1-4,13-16 – ITEM 6,7 EXEC (\*)  
 CRT4 23. PL BAY DR – CL  
 √CENTER LATCHES 1-4,13-16 (two) – blank,CL (~20 sec)
- R13L 24. PL BAY DR – STOP  
 R13L 25. Deselect CENTER LATCHES 1-4,13-16 – ITEM 6,7 EXEC (no \*)  
 CRT4 26. Select CENTER LATCHES 5-8,9-12 – ITEM 4,5 EXEC (\*)
- R13L 27. PL BAY DR – CL  
 CRT4 √CENTER LATCHES 5-8,9-12 (two) – blank,CL (~20 sec)
- R13L 28. PL BAY DR – STOP  
 R13L 29. Deselect CENTER LATCHES 5-8,9-12 – ITEM 4,5 EXEC (no \*)  
 CRT4 POST-PLBD CLOSING CLEANUP
- R13L 30. PL BAY DR SYS (two) – DSBL  
 CRT4 √OP/CL STATUS (ten) – CL
31. AC POWER OFF – ITEM 2 EXEC (\*)  
 32. GPC/CRT 54 EXEC  
MARK AND STOW RAD RETRACT HOSE RECORDING
- L10 (VTR) 33. STOP pb – push, Eject tape, mark as PLBD Closure, stow in RTH bag (L10A1 foam)


# MANUAL PLBD CLOSING (Cont)

## PORT AFT BULKHEAD LATCH GO/NO-GO DIAGRAM

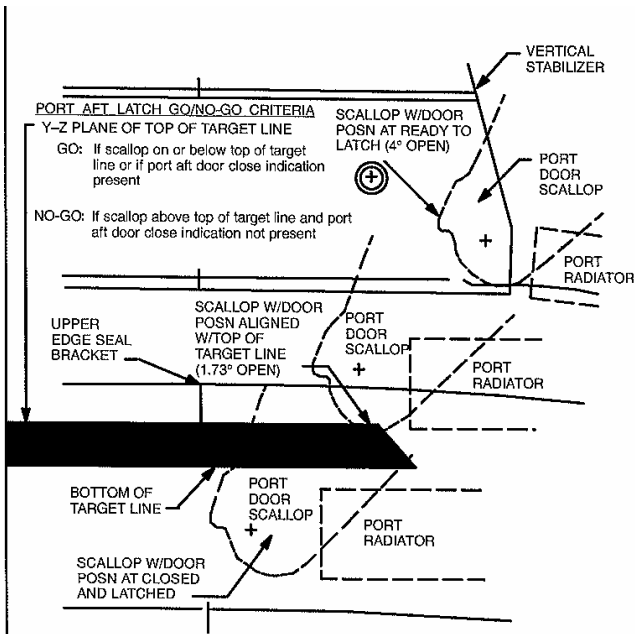

FUNCTION	PLBD CONTROL								PLBD DISPLAY PL MDM								
	Ref: MA73C:C&D for MCA (cb)																
	MTR1				MTR2				C C O O C R R R O		A B A B		A B C				
	AC/MCA	CNTL	MDM	SYS	AC/MCA	CNTL	MDM	SYS	A	B	A	B	A	B	C		
LATCH																	
5-8	1/MID3	AB3/AB2	PL1	2	3/MID2	CA3/CA1	PL2	1	1	2	1	2					
9-12	1/MID1	AB3/AB1	PL1	1	3/MID4	CA3/CA2	PL2	2	1	2	1	2					
1-4	1/MID3	AB3/AB2	PL1	2	3/MID2	CA3/CA1	PL2	1	1	2	1	2					
13-16	3/MID4	CA3/CA2	PL2	2	2/MID2	BC3/BC1	PL1	1	2	1	2	1					
S FWD	1/MID1	AB3/AB1	PL1	1	2/MID4	BC3/BC2	PL2	2	1	2	1	2					
S AFT	3/MID4	CA3/CA2	PL2	2	2/MID2	BC3/BC1	PL1	1	2	1	2	1					
S DOOR	1/MID1	AB3/AB1	PL1	1	2/MID4	BC3/BC2	PL2	2					1	1	2	2	1
													2	1	2	2	2
P FWD	1/MID1	AB3/AB1	PL1	1	2/MID4	BC3/BC2	PL2	2	1	2	1	2					
P AFT	1/MID3	AB3/AB2	PL1	2	3/MID2	CA3/CA1	PL2	1	1	2	1	2					
P DOOR	3/MID4	CA3/CA2	PL2	2	2/MID2	BC3/BC1	PL1	1					2	1	1	2	2
													1	1	1	2	1

## C/L LATCH EXTENDED GUIDE ROLLER TRAJECTORY NO-GO DIAGRAM

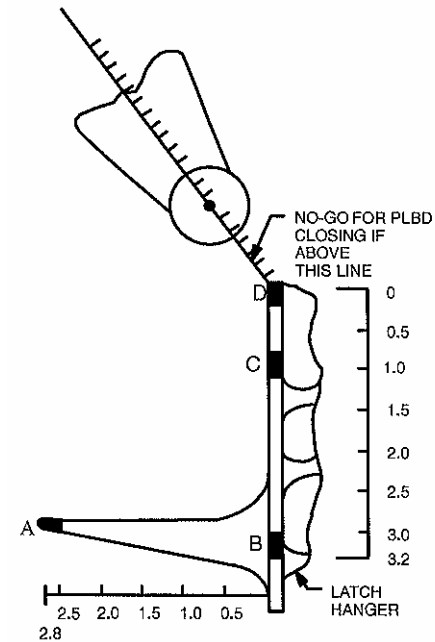

PORT BKHD LATCH TROUBLESHOOTING (MANUAL MODE) [9C]

- CRT4 1. √PORT DOOR FWD, AFT MICRO-SW STATs  
 If PORT DOOR AFT 'C' = '0':  
 : 2. √PORT AFT BULKHEAD LATCH GO/NO DIAGRAM, 1-26  
 : If NO-GO:  
 L Go to MAL, MECH, SSR-2 (CONTINGENCY PLBD CLOSURE)
- If PORT DOOR FWD 'C' = '0':  
 :  
 : NOTE  
 : Use PLB camera A to view port fwd bkhd latch  
 : hook/roller #3 as seen in figures 1-3 and 1-4, 1-28
- R13L 3. PL BAY DR SYS 1 – DSBL  
 :  
 : During the following step, monitor latch hook #3 while driving to  
 : ensure hook motion and proper roller engagement  
 :  
 : \* If at any point latch hook #3 stops moving while \*  
 : \* commanded, or it appears that the hook is going \*  
 : \* to miss or jam into its roller: \*  
 : \* PL BAY DR – STOP \*  
 : \* Go to MAL, MECH, SSR-2 (CONTINGENCY \*  
 : \* PLBD CLOSURE) \*
- CRT4 4. Select PORT FWD,AFT LATCHES – ITEM 11,12 EXEC (\*)  
 R13L 5. PL BAY DR – CL  
 :  
 : 6. When proper roller engagement verified for latch #3:  
 : PL BAY DR – STOP  
 : SYS 1 – ENA  
 L Go to step 9 of MANUAL PLBD CLOSING [9], 1-25
7. Go to step 8 of MANUAL PLBD CLOSING [9], 1-25

STBD BKHD LATCH TROUBLESHOOTING (MANUAL MODE) [9D]

- CRT4 1. √STBD DOOR FWD, AFT MICRO-SW STATs  
 If STBD DOOR AFT (FWD) 'C' = '0':  
 :  
 : NOTE  
 : Use PLB camera C(D) to view stbd aft (fwd) bkhd latch  
 : hook/roller #3 as seen in figures 1-3 and 1-4, 1-28
- R13L 2. PL BAY DR SYS 1(2) – DSBL  
 :  
 : During the following step, monitor latch hook #3 while driving to  
 : ensure hook motion and proper roller engagement  
 :  
 : \* If at any point latch hook #3 stops moving while \*  
 : \* commanded, or it appears that the hook is going \*  
 : \* to miss or jam into its roller: \*  
 : \* PL BAY DR – STOP \*  
 : \* Go to MAL, MECH, SSR-2 (CONTINGENCY \*  
 : \* PLBD CLOSURE) \*
- CRT4 3. Select STBD FWD,AFT LATCHES – ITEM 8,9 EXEC (\*)  
 : 4. PL BAY DR – CL  
 :  
 : 5. When proper roller engagement verified for latch #3:  
 : PL BAY DR – STOP  
 L SYS 1(2) – ENA
6. Go to step 19 of MANUAL PLBD CLOSING [9], 1-25

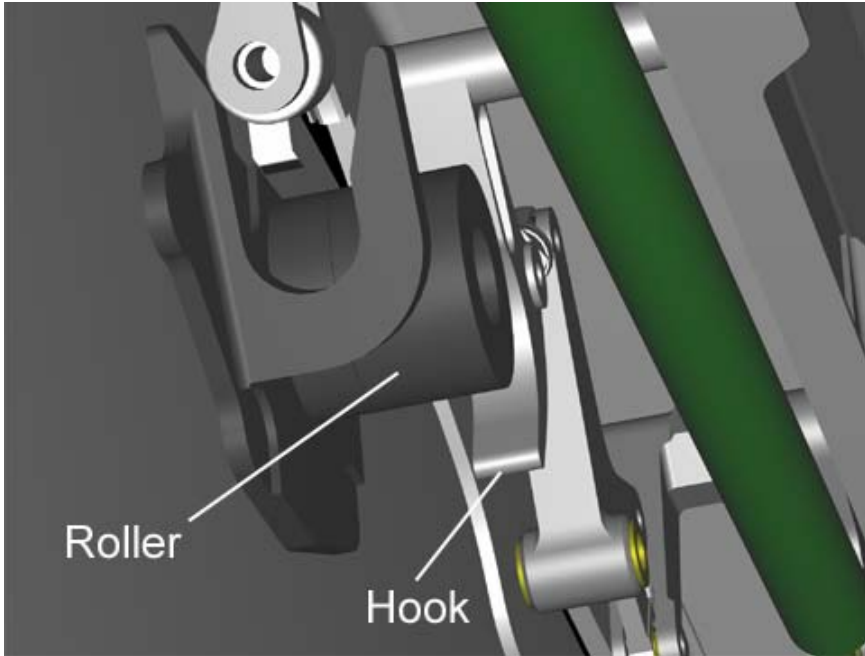


Figure 1-3.- Latch hook/roller #3 typical view from PLB camera

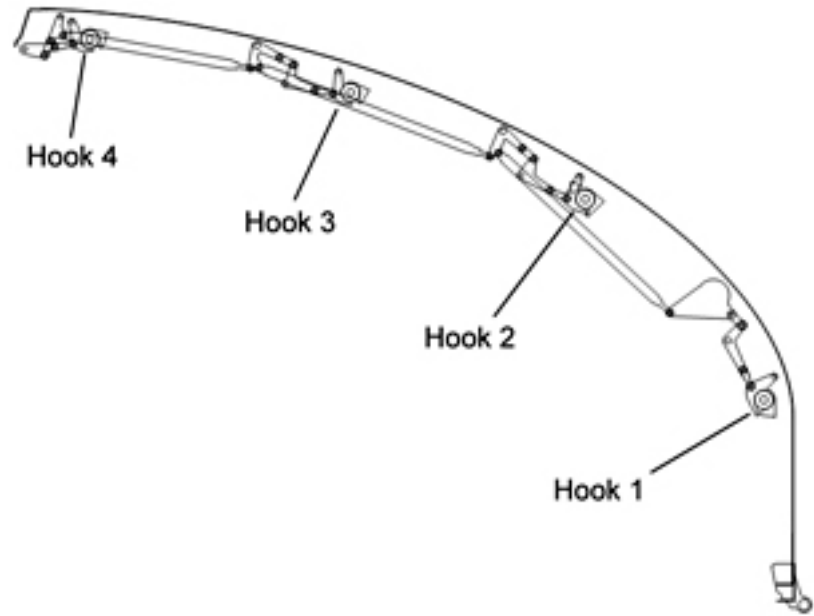


Figure 1-4.- Typical latch hook/roller numbering

# MS AFT FLIGHT DECK ACTIVITIES

NOTE

WAIT FOR GO FROM CDR OR PLT BEFORE STARTING ANY ACTIVITY ON THIS PAGE

TIME (TIG-)	MS AFT DECK ACTIONS
3:35	<u>SPECIALIST SEAT INSTALLATION</u> Verify Leg Attach Collars (four) – DOWN/LOCKED
3:10	<u>PARTIAL ENT SWITCH LIST/VERIF (AFT)</u>
2:55	<u>CONFIG FOR PLBD CLOSING [7]</u> , 1-33
2:51	If reqd, PAYLOAD DEACT, (PL OPS, <u>DEORB PREP</u> ) or PAYLOAD DEACTIVATION (SODF: ASSY OPS: DEORBIT PREP)
2:40	<u>DETAILED PLBD CLOSING PROCEDURES [9]</u> , 1-21
2:25	<u>POST CLOSING CONFIG [10]</u> , 1-34
1:56	<u>DEACT STAR TRKRS &amp; CLOSE DOORS [13]</u> , 1-30 <u>ENT AFT FLT DECK CONFIG [15]</u> , 1-30
1:55	<u>PAYLOAD ENT SW LIST/VERIF</u> (PL OPS, <u>DEORB PREP</u> or PAYLOAD ENTRY SWITCH LIST VERIFICATION (SODF: ASSY OPS: DEORBIT PREP)
1:50	<u>FINAL ENT SWITCH LIST VERIF (AFT)</u> , 3-22 thru 3-33
1:41	<u>RESET C/W [18]</u> , 1-30
1:40	<u>ENTRY REVIEW</u>
1:28	DSO 603, if reqd (BIOMED, <u>BIOMED DSOs</u> )
1:10	<u>CLOTHING CONFIG [21]</u> , 1-30
1:00	Begin Fluid Loading per individual prescription. Fluid Loading should be completed by EI For 1 rev waveoff, repeat half the protocol If > 1 rev waveoff, repeat entire protocol
0:53	<u>AFT AUD SPKR CONFIG [28]</u>
0:52	<u>WIRELESS STOW</u> , if flown <u>[24]</u> , 1-19

Block [11] deleted

<u>AFT AUD SPKR CONFIG [28]</u>	
	Verify CDR,PLT on headsets
A13	OS AUD SPKR PWR – OFF MS COMM CCU PWR – OFF Disconnect and stow Handheld Mic Configure MHA to MS CCU per entry plug-in plan Connect Lightweight Headsets or ACES Comm Cap MS COMM CCU PWR – ON

(Cont next page)

## Back of MS AFT FLIGHT DECK ACTIVITIES

### DEACT STAR TRKRS & CLOSE DOORS 13

- O6 STAR TRKR PWR (two) – OFF
- O14:E,      cb STAR TRKR -Z,-Y (two) – op  
O15:E
- O6 STAR TRKR DR CNTL SYS (two) – CL (start timer)  
√POS tb (two) – bp  
When both tb – cl (~8-24 sec) or either tb – bp > 24 sec:  
STAR TRKR DR CNTL SYS (two) – OFF  
\* If tb – bp > 8 sec, notify MCC \*

### RESET C/W (Contact CDR for additional parameters) 18

**NOTE**  
Expect 'MPS' light and 'HYD PRESS' light and master alarm. 'MPS' light will extinguish at OPS 303 PRO

R13U		
PARAMETER NAME	C/W CH	ENA/INH
MPS He REG P C	39	ENA
L	49	ENA
R	59	ENA
MANF P LO2	69	INH
LH2	79	INH
HYD P 1	99	ENA
2	109	ENA
3	119	ENA

### CLOTHING CONFIG 21

- Stow:  
QDMs
- Unstow, don:  
ACES  
Harness  
Boots
- Verify ACES Gloves (Spare) available. Relocate as reqd
- Remove radiation dosimeter from inflight garments and insert in ACES
- Connect flight deck cooling units per  
PWR/DATA/VIDEO: ASCENT/ENTRY CONFIG  
(REF FS, UTIL PWR)
- A11,A15,      DC UTIL PWR MNA(B,C) – ON as reqd  
F1,O19      Cooling units – Hose Jumper Plug installed  
Pre-chill cooling units 10 min prior to seat ingress

### ENT AFT FLT DECK CONFIG 15

- A6L      DSP  
SYS PWR MN A,MN B (two) – OFF (hold 5 sec)  
√SYS 1,SYS 2 tb (two) – OFF  
cb ESS 1BC SYS PWR CNTL SYS 1 – op  
2CA SYS PWR CNTL SYS 2 – op  
MN A,B DOCK LIGHT (four) – op  
MN A,B,C LOG (six) – op
- A12      **HYD HTR**  
HYD HTR (eight) – OFF
- A1L      **ENTRY COMM**  
S-BD PM MODE – STDN LO  
NSP CODING (two) – OFF  
**S-BAND PAYLOAD**  
S-BD PL CH SEL INTRG 1,2 tw (six) – 910,910  
PWR SYS – OFF  
SEL – PSP  
ANT POLAR – L CIRC  
PSP CMD OUTPUT – PL UMB
- A1R      AUD CTR VOICE RCD SEL CH1 – ICOM A  
CH2 – ICOM B
- A7      If WVS installed:  
√WIRELESS VIDEO PWR – OFF  
√WIRELESS VIDEO HTR – OFF
- R14:C      cb MNB KU ANT HTR – op  
UHF EVA (two) – op  
:D      Open all cbs except TV CABIN (14)  
:E      Open all D CAMR and RMS CAMR cbs (6)  
:F      √cb MN A ESS 1BC LDG GEAR ARM/DN RESET – op
- NOTE**  
Review or mark cb location for ease of finding during post landing procedures
- VPU      √VPU POWER – OFF
- R10      MS AUD A/G 1 – T/R  
A/G 2 – T/R  
A/A – T/R  
ICOM (two) – T/R  
VOX SENS – R  
VOL tw (five) – R  
XMIT/ICOM MODE – R
- L9      PS AUD PWR – AUD TONE  
A/G 1 – T/R  
A/G 2 – T/R  
A/A – T/R  
ICOM (two) – T/R  
AUD VOX SENS – R  
XMIT/ICOM MODE – R  
VOL tw (five) – R
- O19      TV PWR – ON
- L10 (MUX)      VTR/CC PWR – ON (LED on)  
(VIP)      PWR – ON (LED on, DATA FLOW LED flashes twice)  
(VTR)      √ON/STANDBY LED – green



# MS MIDDECK ACTIVITIES

**NOTE**

WAIT FOR GO FROM CDR OR PLT BEFORE STARTING ANY ACTIVITY ON THIS PAGE

TIME (TIG-)	MS MIDDECK ACTIONS
3:50	<u>ENT STOWAGE</u> [ 3 ]
3:50	<u>ENT AIRLOCK CONFIG</u> [ 3A ], 1-32
3:35	<u>SPECIALIST SEAT INSTALLATION</u> Verify Leg Attach Collars (four) – DOWN/LOCKED Verify LiOH Door Latches (four) – ENGAGED
3:10	<u>PARTIAL ENT SWITCH LIST/VERIF (MID)</u> , 3-10 thru 3-12
1:55	<u>ENT MIDDECK CONFIG</u> [ 16 ]
1:50	<u>FINAL ENT SWITCH LIST/VERIF (MID)</u> , 3-30 thru 3-32
1:40	<u>ENTRY REVIEW</u>
1:28	DSO 603, if reqd (BIOMED, <u>BIOMED DSOs</u> )
1:10	<u>CLOTHING CONFIG</u> [ 20 ], 1-32
1:00	Begin Fluid Loading per individual prescription. Fluid Loading should be completed by EI For 1 rev waveoff, repeat half the protocol If > 1 rev waveoff, repeat entire protocol
0:55	Remove, stow Side Hatch UV Filter, Locking Device, and Pyro Box Safing Pin
0:51	<u>MD AUD SPKR CONFIG</u> [ 29 ], 1-32
0:35	<u>GALLEY DEACT</u> [ 26 ]
0:33	<u>WCS DEACT</u> [ 27 ], 1-32

<u>ENT MIDDECK CONFIG</u> [ 16 ]	
MO42F	<u>ENTRY COMM</u> MIDDECK SPKR AUD A/G 1 – T/R A/G 2 – T/R A/A – T/R ICOM (two) – T/R VOX SENS – R VOL tw (five) – R XMIT/ICOM MODE – R
MO10W	<u>MIDDECK PCS</u> 14.7 CAB REG INLET vlv (two) – CL H2O TK N2 REG INLET vlv (two) – OP O2 REG INLET vlv (two) – CL
MO32M	LEH O2 vlv (two) – R
MO69M	LEH O2 8 vlv – CL Remove, stow O2 Bleed Orifice LEH O2 8 vlv – R 7 vlv – R
SIDE HATCH	NEG PRESS RLF VLV COVER (two) – pull open to vent; push firmly to close
MA73C:F	<u>RMS PNL LTS</u> (if RMS onboard) cb RMS PRI ΦA – op B/U ΦA – op <u>AC UTILITY OUTLET</u> cb AC1 MAR 3Φ – op

<u>ENT STOWAGE</u> [ 3 ]
<u>PERSONAL HYGIENE SYS STOWAGE</u> Stow: Personal Hygiene Kits Hose
<u>AIRLOCK CLOSEOUT</u> Tether soft goods to EVA tether point or AVL Stowage Bag. Gray Tape to floor
<u>POLE SETUP</u> Reinstall Stbd Pip Pin Reinstall large Port Pin: Retract and hold Locking Pin (Ring) Reinstall large Pin Release Locking Pin (Ring) Slide forward Safing Latch
√ Pole Straps secure
<u>FDI STOWAGE</u> Stow FLIGHT PLAN
<u>CABIN CONFIG</u> Stow: Backup PGSC Middeck Camrs, Accessories FWD/AFT Shades, Filters Exercise Equipment
√ Retention net is in ASC/ENT config
<u>EGRESS ROUTE CONFIG</u> Tape Foot Loops in egress routes
<u>NOTE</u>
Chemlights are middeck carry-on items. Activate green chemlights after TIG. Do not activate orange chemlights (slide ops only)
Install green chemlights (8 ea) near egress hdw and egress routes Install orange chemlights (2 ea) above side hatch

<u>GALLEY DEACT</u> [ 26 ]	
GALLEY	OVEN/RHS – OFF H2O HTRS (two) – OFF √OVEN FAN – OFF √REHYD STA lever – cl (push in) √OVEN DOOR LATCH – latched
MA73C:G	cb AC3 GALLEY FAN (three) – op
ML86B:A	MNC SPLY H2O GALLEY SPLY – op
:B	MNA GALLEY OVEN – op
	MNB GALLEY H2O HTR – op

(Cont next page)

## Back of MS MIDDECK ACTIVITIES

### ENT AIRLOCK CONFIG 3A

- |             |   |
|-------------|---|
| MO13Q       | 1. √AIRLK FAN A(B) – OFF  |
| TNL EXT     | 2. Disconnect A/L Fan Inlet Duct from aft middeck floor fitting and A/L Fan Inlet and strap to Tunnel Extension wall                                    |
| MA73C:G     | 3. cb AC1,2 ARLK TNL FAN A,B (six) – op   |
| EXT A/L     | 4. Unstow,install diffuser cap on aft middeck floor fitting   |
| AW18A       | 5. NEG PRESS RLF vlv cover (two) – pull open to vent; push firmly to close  |
| INNER HATCH | 6. LTG FLOOD 1(3,4) – OFF   |
|             | 7. Perform AIRLOCK ENTRY SWITCH LIST/VERIFICATION, 3-3  |
|             | 8. Close hatch:<br>Position handle to preclosing posn per decal<br>Hatch – rotate about hinge and push<br>Handle – CCW to LATCH<br>Lock lever to LOCKED |
|             | 9. Equal vlv (two) – NORM, install caps   |
| MIDDECK FLR | 10. √EMU O2 ISOL vlv – CL   |
| MO13Q       | 11. AIRLK 2 – OFF/ON  |
|             | 12. √AIRLK H2O S/O vlv – OP (tb-op)   |
| ML86B:C     | 13. cb MNB EXT ARLK HTR VEST Z1/2/3 – op<br>If TNL ADAPT flown:   |
| :E          | 14. cb MNA FLOOD TNL ADAPT 2 – op<br>cb MNB FLOOD TNL ADAPT 3 – op<br>cb MNC FLOOD TNL ADAPT 4 – op   |
| :F          | 15. cb MNA FLOODS AIRLK 1 – op<br>MIDDECK 9 – op<br>cb MNB FLOODS MIDDECK 10 – op<br>AIRLK 3 – op<br>cb MNC FLOODS AIRLK 4 – op                         |
| :G          | 16. cb ESS 1BC FLOOD AIRLK 2 – op<br>If TNL ADAPT flown:<br>17. cb ESS 1BC FLOOD TNL ADAPT 1 – op   |

### CLOTHING CONFIG 20

Unstow,don:  
ACES  
Harness  
Boots

Verify ACES Gloves (Spare) available. Relocate as reqd

Remove radiation dosimeter from inflight garments and insert in ACES; if waveoff, remove radiation dosimeter from ACES and insert in inflight garments

#### NOTE

Refer to flight specific utility outlet plug-in plan if reqd

Connect middeck cooling units per PWR/DATA/VIDEO:  
ASCENT/ENTRY CONFIG (REF FS, UTIL PWR)

MO13Q,	DC UTIL PWR MNA(B,C) – ON as reqd
MO30F,	Cooling units – Hose Jumper Plug installed
MO52J,	Pre-chill cooling units 10 min prior to seat ingress
PDB J2(3,4),	
ML85E (MUP)	

### WCS DEACT 27

- |       |   |
|-------|---|
| WCS   | VAC VLV – CL<br>√MODE sel – AUTO<br>FAN SEP sel – OFF<br>Unstow hose from cradle, attach hose to WCS housing via Velcro straps<br>Stow:<br>WCS Trash Can<br>Mirror<br>Privacy Curtain |
|       | Foot/toe restraints – up,latched  |
|       | Close and latch door  |
| ML31C | VAC VENT ISOL VLV BUS SEL – MNB<br>CNTL – CL (tb-CL)<br>NOZ HTR – OFF   |
|       | √Middeck lts as reqd  |

### MD AUD SPKR CONFIG 29

- |       |   |
|-------|---|
| MO42F | MIDDECK AUD SPKR PWR – OFF                      |
| MO39M | MIDDECK COMM CCU PWR – OFF                      |
|       | Disconnect and stow Handheld Mic                |
|       | Configure MHA to MID CCU per entry plug-in plan |
|       | Connect Lightweight Headsets or ACES Comm Cap   |
|       | MIDDECK COMM CCU PWR – ON                       |

**CONFIG FOR PLBD CLOSING 7**

CONFIG RMS/OBSS (if RMS/OBSS onboard)

- 1. ✓ Elbow Camr in aligned position
  - Pan 90° from X-axis
  - Tilt per decal
- A8L 2. RMS PWR – OFF (SM ALERT, BCE BYP MCIU)  
PORT RMS HTR (two) – OFF
- R11L SET UP LIGHTS
- MDU 3. IDP/CRT4 PWR – ON
- A6U ✓ CRT 4 PWR – ON  
✓ ANNUN BUS SEL – MNC

NOTE

Minimum operating time for PLB  
Floodlights: 10 min ~3 min to full bright

- A7U PL BAY FLOOD AFT STBD –
- PORT –
- MID STBD –
- PORT –
- FWD STBD –
- PORT –
- BHD –

Record MET \_\_\_\_ / \_\_\_\_ : \_\_\_\_ : \_\_\_\_

- \* If PLB floodlight not ON to full bright within 5 min: \*
- \* (Aff) PL BAY FLOOD – OFF \*

TV ACT

- 4. Perform ACTIVATION, OPERATION (Cue Card, TV) to activate camrs A, B, C, D (ALC-AVG with Illuminators on)
- 5. ✓ MCC for rad hose camr pointing and composed MUX1(A,C) and MUX2(D,B) camr views (see fig 1-5)

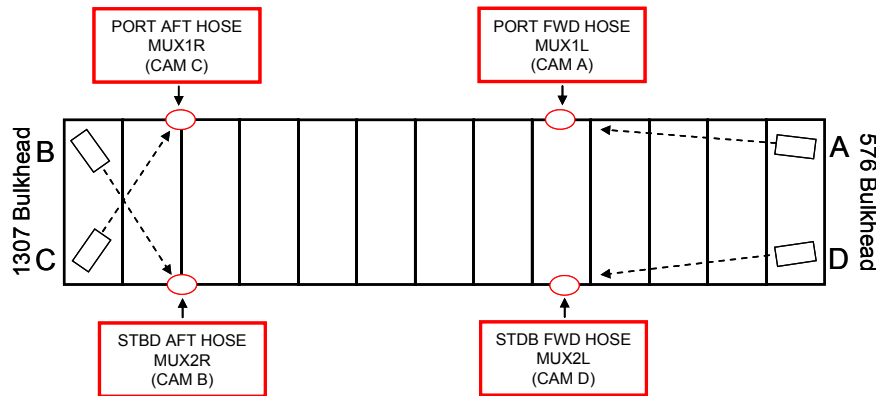


Figure 1-5. RAD hose camera muxing

A7

If camr pointing and muxing required for rad retract hose recording:

Point Camrs A and C at PORT FWD and AFT rad retract hose:

- 6. VID OUT MON 1 pb – push  
IN A pb – push  
PAN/TILT, ZOOM, FOCUS as reqd to center PORT FWD rad retract hose in FOV
- 7. VID IN C pb – push  
PAN/TILT, ZOOM, FOCUS as reqd to center PORT AFT rad retract hose in FOV

Point Camrs D and B at STBD FWD and AFT rad retract hose:

- 8. VID OUT MON 2 pb – push  
IN D pb – push  
PAN/TILT, ZOOM, FOCUS as reqd to center STBD FWD rad retract hose in FOV
- 9. VID IN B pb – push  
PAN/TILT, ZOOM, FOCUS as reqd to center STBD AFT rad retract hose in FOV

MUX Camrs A and C:

- 10. VID OUT MON 1 pb – push  
IN MUX 1 pb – push  
OUT MUX 1 L pb – push  
IN A pb – push  
OUT MUX 1 R pb – push  
IN C pb – push

MON 1

- 11. Verify both rad retract hoses are centered in each MUX half views; adjust accordingly

A7

MUX Camrs D and B:

- 12. VID OUT MON 2 pb – push  
IN MUX 2 pb – push  
OUT MUX 2 L pb – push  
IN D pb – push  
OUT MUX 2 R pb – push  
IN B pb – push

MON 2


- 13. Verify both rad retract hoses are centered in each MUX half views; adjust accordingly

Route MUXED video to DTV

- R1 14. ✓ PL AUX – ON
- MA73C ✓ cb AC2 PL 3Φ – cl
- L10 15. Reinstall VIP OUT-to-VTR IN jumper cable
- (MUX) 16. VTR/CC PWR – on (LED on)
- (VIP) 17. ✓ ATU – REC  
✓ CCTV VID IN – J3  
PWR – on (LED on, DATA FLOW flashes twice)
- (VTR) 18. ✓ ON/STANDBY LED – green  
✓ Switches set to white dot (seven)  
Insert new tape (tape icon LED on)
- A7 19. VID OUT DTV pb – push  
IN MUX 1 pb – push
- L10 (VTR) 20. ✓ MUX scene displayed on VTR LCD

POST CLOSING CONFIG 10

If radiator hose exhibits bend,  
 : RADIATOR HOSE STILL PHOTOS

- Vol 3B : Unstow, Configure Hardware
- 400mm lens : 1. Unstow D2Xs, 400mm lens
- D2Xs :   √400mm lens attached to D2Xs
- :   Aperture - Min, locked
- :   Lens Focus Mode - M
- :   Body Focus Mode - S
- :   √Batt installed
- :   √Flash Card installed
- :   Pwr - ON
- :   Top LCD
- :   √Batt
- :   √Frames remaining sufficient
- :   Exp Comp (  ) - 0.0
- :   Exp Mode - A
- :   f/stop - f/2.8
- :   Meter - Matrix (  )
- :   Diopter - Adjust
- :   Frame Rate - S
- :   √BKT disabled - 0 F
- :   Rear LCD
- :   ISO - 800
- :   √QUAL - RAW
- :   √WB 0,A
- :   AF Area Mode - [ [ ] ]
- :   √Focus Area - Center
- :   √Focus Selector Lock - L

W9, W10

D2Xs

Vol 3B

A8L  
 R12 (OBSS)  
 (OPP)

A7U  
 L10 (VTR)

Photograph Bent Radiator Hose(s)

- 2. √Camr A,B,C,D illuminators,PLB lights are ON
- Remove window shield(s)
- Frame radiator hose while stabilizing lens on window frame
- Focus on hose
- Take images, one hose at a time
- Reinstall window shield

Deactivate,Stow Hardware

- 3. Exp Mode - P
- Rear LCD
- ISO - 100
- Turn Camr Pwr - OFF
- L 4. Stow D2Xs, 400mm lens

CONFIG STBD RMS/OBSS

- STBD RMS HTR (two) – OFF
- RSC PWR – OFF
- OBSS SW PWR – OFF
- cb OBSS SW PWR CB1 – op

NOTE

PLB Floodlights must be off for minimum of 10 min  
 UNBLOCKED, 16 min BLOCKED prior to reuse

After floodlights ON > 10 min:  
 PL BAY FLOOD (all) – OFF  
 Install fresh 3-hr tape for entry video  
 Reconnect Mini-Cam AVIU J1 video output to VTR IN,  
 as reqd  
 Perform DEACTIVATION (Cue Card, TV), then:  
 Stow Flight Deck Camrs, Accessories


FOOT LOOP CONFIG

Tape Foot Loops in egress routes

## DEORBIT PREP BACKOUT PROCEDURES

This Page Intentionally Blank

# DEORBIT PREP BACKOUT SUMMARY TIMELINES

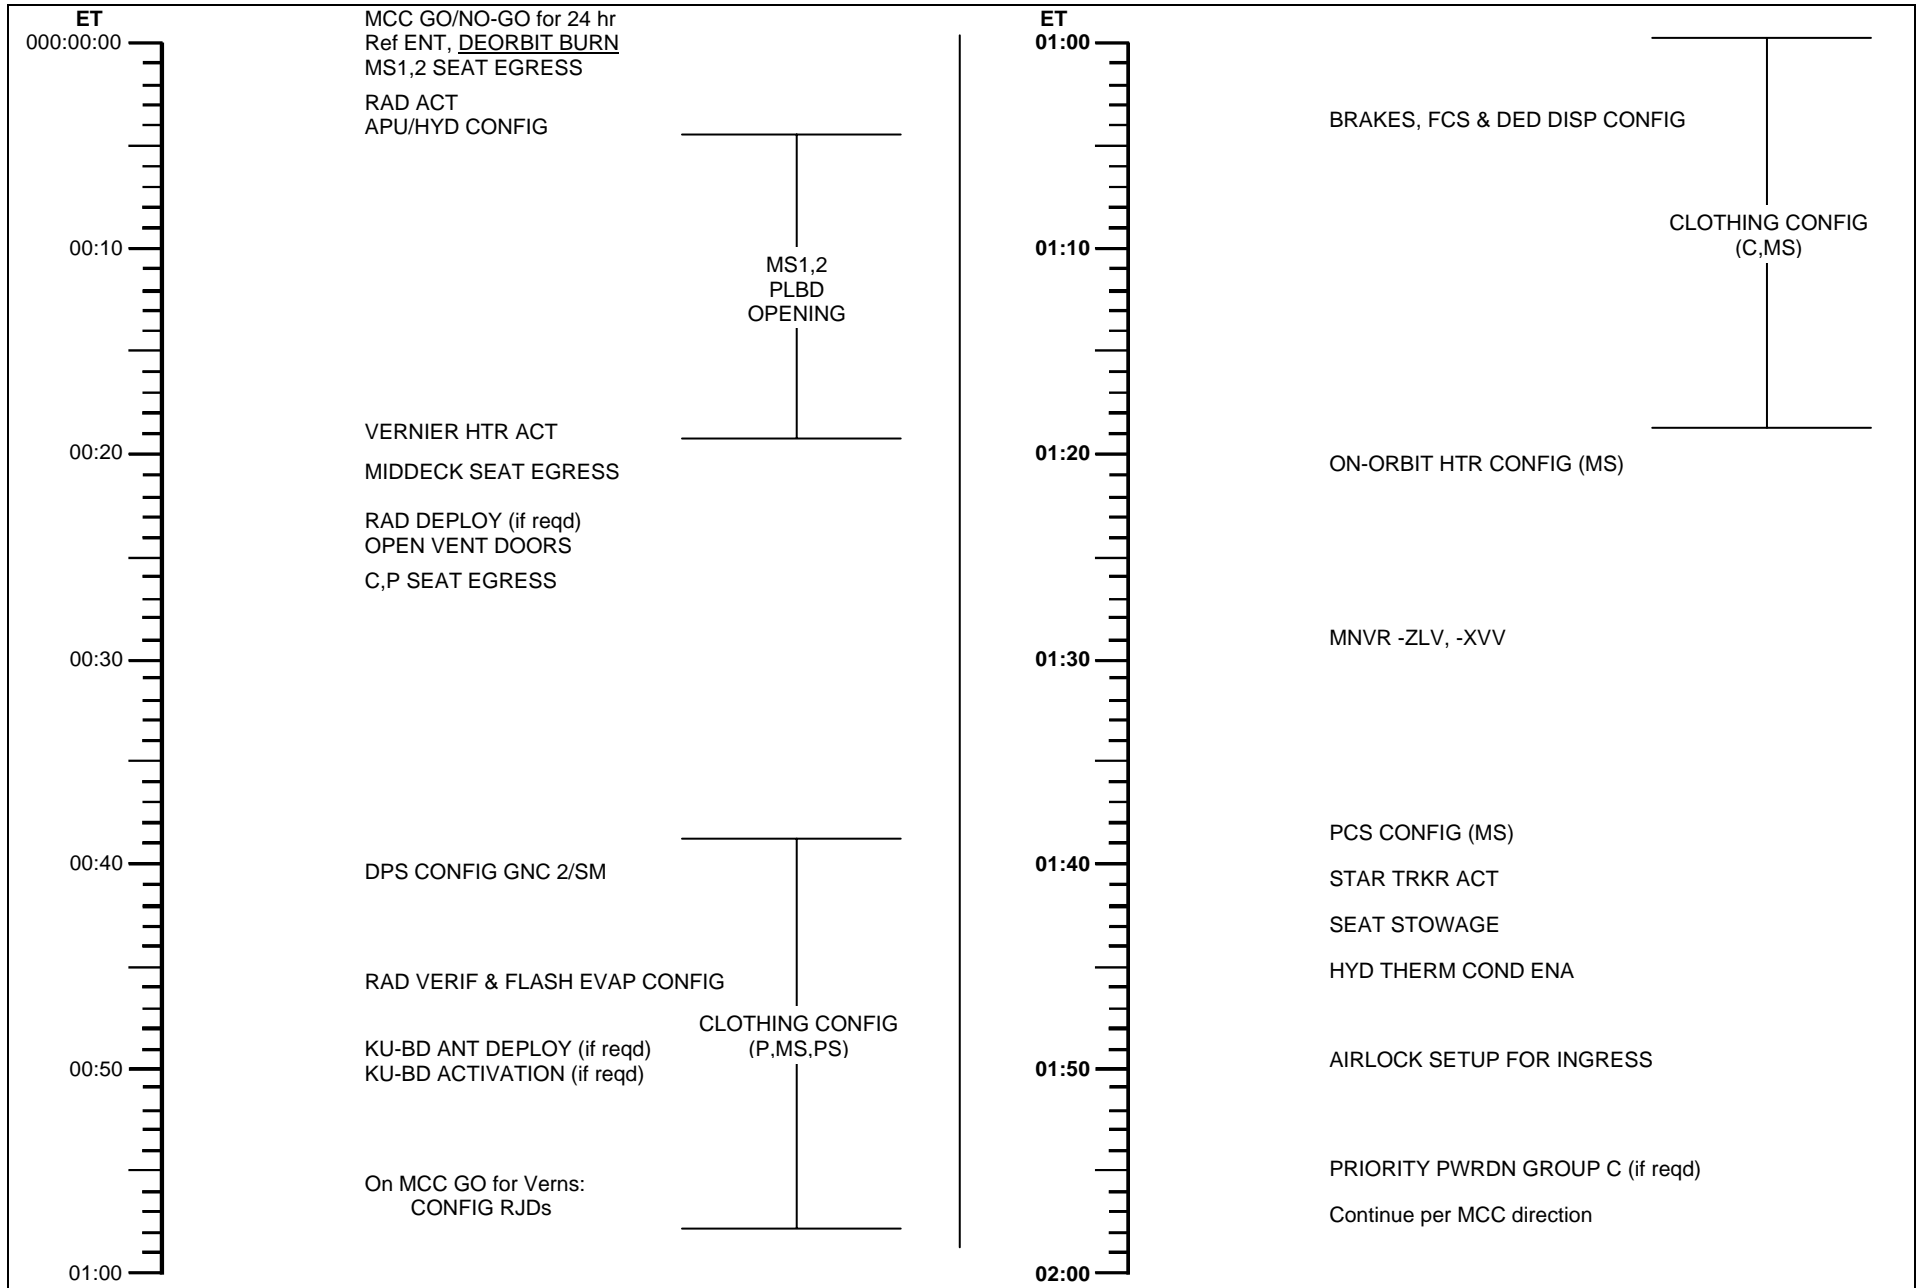

This Page Intentionally Blank



ET		1: GNC DEORB MNVR COAST	2: GNC DEORB MNVR COAST	3: BFS, GNC DEORB MNVR COAST
00:00:00	MCC/CREW GO/NO-GO FOR 24 HR	MS1,2	C6	Ref ENT, DEORBIT BURN LEH O2 vlv (four) – CL FLT DECK SPECIALIST SEAT EGRESS (all others remain seated) CONFIG FOR PLBD OPENING [1], 2-15
	TRANS DAP AUTO RT 0.5 DB 3.5	C		RAD ACT [2]
		P		APU/HYD CONFIG [3]
		MS		PLBD OPENING [5], 2-13
00:10				MS1,2 PLBD OPENING
		C,P	O5,O9	MCC: GO/NO-GO for PRIORITY PWRDN GROUP C scheduled at ET 02:00 L,R AUD A/G 2 (two) – RCV XMIT/ICOM MODE – PTT/VOX (recommended)
			O6	UHF MODE – OFF
00:15		C	L1	CAB TEMP CNTLR – 2 TEMP – adj rotary as reqd
		C	L4:J	cb SIG COND HUM SEP – cl IMU FAN – cl
		MS		VERNIER HTR ACT [6]
00:20		MS,PS		WHEN PLBD OPENING COMPLETE: SEAT EGRESS (all middeck)
		MS	MO32M	LEH O2 vlv (two) – CL
			MO69M	– CL
		MS		RAD DEPLOY, if reqd (ORB OPS, ECLS)
		MS		PRELIM MIDDECK CONFIG [7], 2-17
		P		OPEN VENT DOORS 1: GNC 51 OVERRIDE
00:25		C,P		VENT DOOR CNTL OPEN – ITEM 43 EXEC (*) Unstow/install HUD covers (two) SEAT EGRESS
00:30		MS		PDF/COMM CONFIG MS AFT ACTIVITIES [8], 2-15

**RAD ACT [2]**

C L1

√RAD CNTLR OUT TEMP – NORM  
BYP VLV MODE (two) – AUTO  
CNTLR LOOP (two) – AUTO A(B)

After ~90 sec,  
√RAD BYP VLV tb (two) – RAD

- \* If tb(s) remain in BYP or return to BYP: \*
- \* Use alternate RAD CNTLR \*
- \* Do not drive BYP VLV(s) manually \*
- \* If tb(s) bp: \*
- \* Do not select alternate RAD CNTLR \*
- \* Do not drive BYP VLV(s) manually \*
- \* If EVAP OUT T low or H2O ICH OUT T low: \*
- \* RAD BYP VLV MODE (two) – MAN \*
- \* MAN SEL (two) – BYP \*
- \* (after ~3 sec tb-BYP) \*

**APU/HYD CONFIG [3]**

P R2

APU SHUTDOWN (EPCL, APU/HYD)

BLR N2 SPLY (three) – OFF  
HYD MN PUMP PRESS (three) – NORM

**VERNIER HTR ACT [6]**

P A14

RCS/OMS HTR FWD RCS JET 5 – AUTO  
AFT RCS JET 5 – AUTO

**NOTE**  
Delay use of verniers until MCC GO in GNC OPS 2

**CLOTHING CONFIG** 9

Doff/Stow:  
Harness,Boots,ACES,UCD (if not used)

Remove radiation dosimeter from ACES and insert in inflight garments

Doff/Stow in Wet Trash (if used):  
UCD (clamp)  
Emesis Bag (unstow new Bag)

**DPS CONFIG TO GNC2/SM** 11

**NOTE**

No keyboard entries or sw throws 10 sec:  
Before and after moding PASS GPCs to RUN  
Before OPS transition or set expansion/contraction requests until new OPS base page is displayed

1. **TRANSITION TO GNC OPS 201**

GNC 0 GPC MEMORY

√CONFIG – ITEM 1 +2 EXEC

Config for single G2 GPC ops unless directed otherwise by MCC:

Modify MC 2 per table →

CONFIG GPC		DUAL G2	SINGLE G2
		2	2
STR	1	1	1
	2	2	1
	3	1	1
	4	2	1
PL	1/2	0	0
CRT	1	1	1
	2	2	1
	3	0	0
	4	2	1
L	1	0	0
	2	0	0
MM	1	1	1
	2	2	1

BFC CRT DISP – OFF

GNC, OPS 201 PRO

GNC UNIV PTG

DAP: B/AUTO/PRI

GNC 1 DPS UTILITY

√CKPT RETRV ENA – ITEM 12 EXEC (\*)

BFC CRT DISP – ON

BFS, MSG RESET (√BFC It off)

GNC, GPC/CRT 04 EXEC

If single G2 GPC ops:

MAJ FUNC – PL

GPC/CRT 2/X EXEC

X: PL GPC MEMORY

CONFIG ITEM 45 +2 EXEC

GPC ITEM 46 +2 EXEC

STORE ITEM 47 EXEC

Store complete when MC = 02

√All IDPs deassigned from FD GPC

GPC MODE 2 – STBY (tb-bp)

– HALT (tb-bp)

– STBY (tb-RUN)

– HALT (tb-bp)

C3

C3

C2

CRT

CRTX

O6

C3  
CRTX

2. **FREEZE DRY GPC 3**

BFC CRT DISP – OFF

MAJ FUNC – PL

GPC/CRT 3/X EXEC

X: PL GPC MEMORY

CONFIG – ITEM 45 +2 EXEC

GPC – ITEM 46 +3 EXEC

STORE – ITEM 47 EXEC

Store complete when MC = 02 (~16 sec)

√All IDPs deassigned from FD GPC

GPC MODE 3 – STBY (tb-bp)

– HALT (tb-bp)

– STBY (tb-RUN)

– HALT (tb-bp)

O6

CRTY

3. **TRANSITION GPC 4 TO SM OPS 201(401)**

MAJ FUNC – SM

GPC/CRT 4/X EXEC

X: SM GPC MEMORY

CONFIG – ITEM 1 +4 EXEC

√MC 4(5) per table →

SM, OPS 201(401) PRO

X: SM ANTENNA

DAP: B/AUTO/PRI

SM 1 DPS UTILITY

UL CNTL AUTO – ITEM 35 EXEC

CRTX

CONFIG GPC	4(5)
00040	
STR 1	0
2	0
3	0
4	0
PL 1/2	4
CRT 1	4
2	4
3	0
4	4
L 1	4
2	0
MM 1	4
2	4

C3  
CRT3

4. **RECONFIG GPCs**

BFC CRT DISP – ON

BFS, GNC OPS 000 PRO

3: BFS, GNC GPC MEMORY

C3

BFC CRT DISP – OFF

O6

√All IDPs deassigned from BFS

GPC MODE 5 – STBY (tb-RUN)

(releases payload buses 1,2)

then HALT (tb-bp)

OUTPUT 4 – TERM (tb-bp)

5 – NORM (tb-bp)

P/I Locker

Unstow and install GPC Mode Switch Guard

C2

5. **MEDS RECONFIG**

GPC/CRT 03 EXEC

44 EXEC

IDP/CRT3 PWR – OFF

ET		1: GNC 51 OVERRIDE	2: GNC DEORB MNVR COAST
00:30	TRANS DAP	3: BFS, GNC DEORB MNVR COAST	
	AUTO		
	RT 0.5		
	DB 3.5		
00:35			
	P	<u>CLOTHING CONFIG</u> [9], 2-6	CLOTHING CONFIG (P,MS,PS)
	MS,PS	<u>CLOTHING CONFIG</u> [10], 2-15	
00:40			
	C	If reqd, <u>PAYLOAD REACT (PL OPS, DEORB PREP)</u> or <u>PAYLOAD REACTIVATION (SODF: ASSY OPS: DEORBIT PREP)</u>	
(A1) B1			
AUTO/PRI	C	<u>DPS CONFIG TO GNC2/SM</u> [11], 2-6 and 2-7	
RT 0.5			
DB 3.0			
00:45			
	P	<u>RAD VERIF &amp; FLASH EVAP CONFIG</u> [12]	
	MS	<u>RMS PNL LT, TEMP MON, HTR ACT, OBSS,</u> <u>C/W</u> [13], 2-16	
	C	<u>KU-BD ANT DEPLOY</u> , if reqd (ORB OPS, <u>COMM/INST</u> ) <u>KU-BD ACTIVATION</u> , if reqd (ORB OPS, <u>COMM/INST</u> )	
00:50			
	MS	<u>MIDDECK CONFIG</u> [14], 2-17 and 2-18	
	C,P	If MCC GO for use of verniers: <u>CONFIG RJDs</u> RJD MANF L5/F5/R5 DRIVER – ON, wait 5 sec DAP: A/AUTO/VERN Else, load DAP A5 (Nose and Tail) or A6 (Tail) <u>GNC 20 DAP CONFIG</u> ITEM 10 +0.1 EXEC 11 +1 0 EXEC 22 +1 EXEC DAP: A/AUTO/ALT	
00:55		O16:F	
	A1 (B1)		
	AUTO		
	VERN		
	RT 0.2		
	DB 1.0		
01:00			


6. TFL/DFL FOR ON-ORBIT OPS  
√MCC for TFL/DFL config  
Perform LOAD PCMMU FORMAT (ORB OPS FS, COMM/INST) and LOAD PDI DECOM FORMAT (ORB OPS FS, COMM/INST)

7. ERROR LOG RESET  
After MCC GO:  
SM 0 GPC MEMORY  
ERR LOG RESET – ITEM 48 EXEC  
GNC 0 GPC MEMORY  
ERR LOG RESET – ITEM 48 EXEC

RAD VERIF & FLASH EVAP CONFIG [12]

L1           √RAD BYP VLV tb (two) – RAD FLOW  
CRT2       When FREON LOOP RAD OUT T < 60 degF:  
L1           HI LOAD EVAP – OFF  
             FLASH EVAP CNTLR PRI B(A) – OFF  
L2           FREON ISOL MODE – AUTO  
2: SM SYS SUMM 1

This Page Intentionally Blank

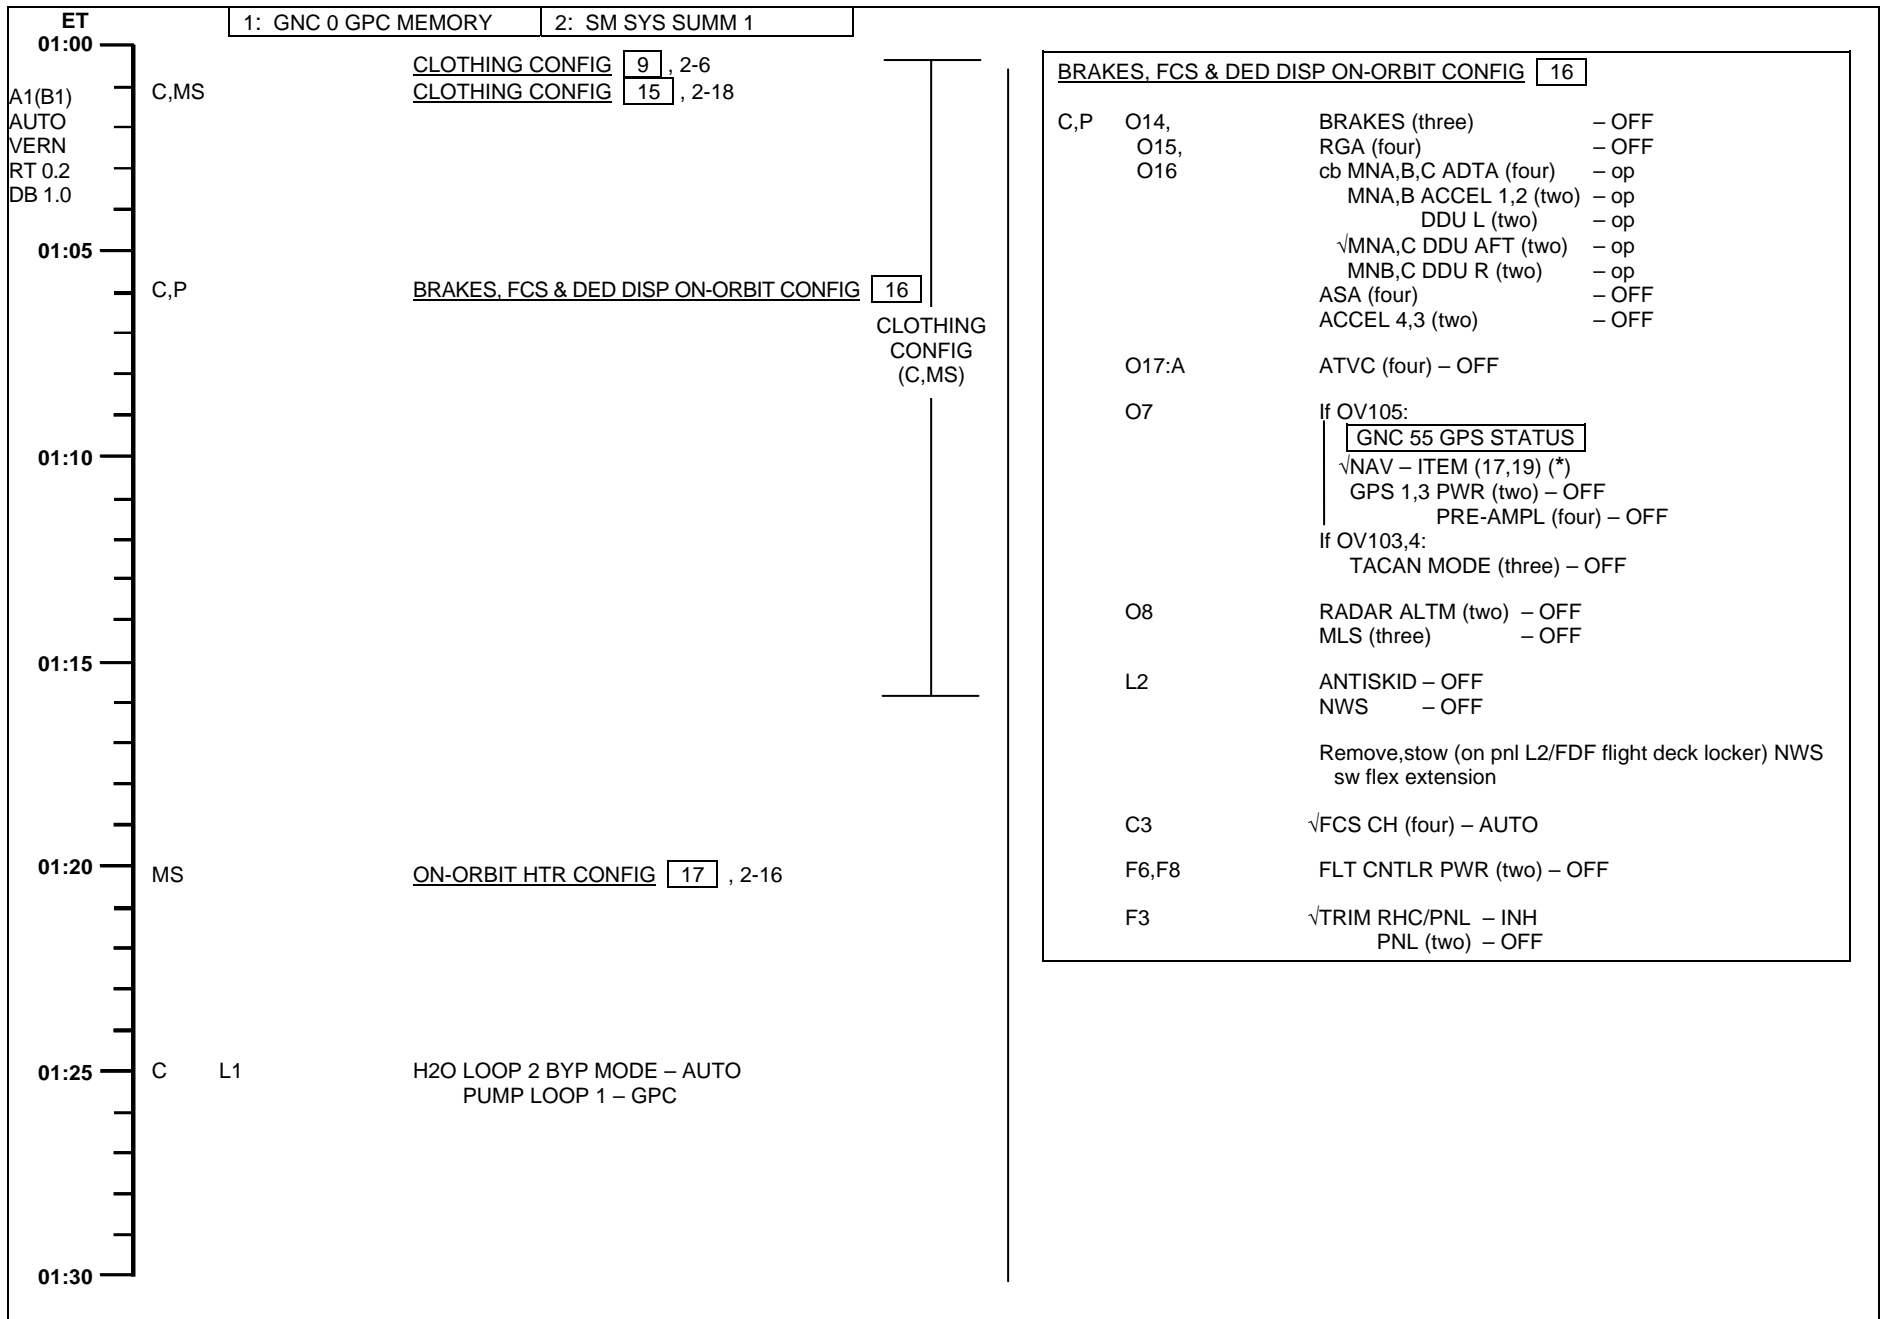

This Page Intentionally Blank

ET		1: GNC 0 GPC MEMORY	2: SM SYS SUMM
01:30	C		<u>AUTO MNVR -ZLV, -XVV</u> √TGT ID +2 BODY VECT +3 OM +0 DAP: A/AUTO/VERN Initiate TRK
01:35			
01:40	C,MS P		<u>ON-ORBIT PCS2(1) CONFIG</u> <input type="checkbox"/> 19, 2-18 <u>STAR TRKR ACT</u> <input type="checkbox"/> 20
	MS,PS		<u>SPECIALIST SEAT REMOVAL/STOWAGE</u>
01:45	P R2		<u>HYD THERM COND ENA</u> HYD CIRC PUMP (three) – GPC
01:50	MS		<u>AIRLOCK SETUP FOR INGRESS</u> <input type="checkbox"/> 21, 2-18
01:55			
02:00			On MCC call: PRIORITY PWRDN GROUP C, if reqd (ORB PKT, <u>PRIORITY PWRDN</u> )  Continue per MCC direction

<u>STAR TRKR ACT</u> <input type="checkbox"/> 20	
O14:E, O15:E	cb STAR TRKR -Z,-Y (two) – cl
O6	STAR TRKR PWR (two) – ON
C2	GNC I/O RESET
O6	STAR TRKR DR CNTL SYS (two) – OP (start timer) √POS tb (two) – bp When both tb – OP (~8-24 sec) <u>or either tb – bp &gt; 24 sec:</u> STAR TRKR DR CNTL SYS (two) – OFF
	<input type="checkbox"/> X: GNC 22 S TRK/COAS CNTL
	S TRK -Y,-Z: STAR TRK – ITEM 3,4 (*)
	<input type="checkbox"/> X: GNC 21 IMU ALIGN
	RESUME
	* If tb – bp > 8 sec, notify MCC *

This Page Intentionally Blank



# PLBD OPENING

## DETAILED PLBD OPENING PROCEDURES 5

### CAUTION

Use MANUAL mode for subsequent BFS PLBD ops if BFS AUTO sequence has been interrupted by reversing latch/door drive direction or if MANUAL mode has already been used during mission

- |      |   |
|------|---|
| R13L | <ul style="list-style-type: none"> <li>* If no motion determined visually or 'OP/CL' *</li> <li>* not blank within 10 sec after cmd: *</li> <li>* PL BAY DR – STOP *</li> <li>* Go to MAL, MECH, 9.1a *</li> <li>* If Latch not 'OP' in single-motor time: *</li> <li>* PL BAY DR – STOP *</li> <li>* Go to MAL, MECH, 9.1d *</li> <li>* If door motion stops and not 'OP': *</li> <li>* PL BAY DR – STOP *</li> <li>* Go to MAL, MECH, 9.1f *</li> </ul>             |
| O6   | <ul style="list-style-type: none"> <li>* If BFS GPC fails during operation: *</li> <li>* PL BAY DR SYS (two) – DSBL *</li> <li>* DR – STOP *</li> <li>* MDM PL1,2 (two) – OFF *</li> <li>* GPC MODE 5 – STBY, HALT *</li> <li>* MDM PL1,2 (two) – ON *</li> <li>* Proceed with DPS CONFIG TO GNC2/SM <span style="border: 1px solid black; padding: 0 2px;">11</span>, then *</li> <li>* continue in MANUAL PLBD OPENING PROCEDURE, *</li> <li>* as reqd *</li> </ul> |
| R13L | <ul style="list-style-type: none"> <li>* If SM GPC fails during this operation: *</li> <li>* PL BAY DR SYS (two) – DSBL *</li> <li>* DR – STOP *</li> <li>* Go to PASS SM GPC FAIL (ORB PKT, DPS) *</li> </ul>  |

### NOTE

Note any single-motor ops (continue ops)  
(single-motor times = 2x listed dual-motor times)

## AUTO PLBD OPENING PROCEDURE

- |                |  |
|----------------|--|
| MS CRTX        | <ol style="list-style-type: none"> <li>1. SM, OPS 202 PRO or <span style="border: 1px solid black; padding: 0 2px;">BFS, SM 63 PL BAY DOORS</span><br/><span style="border: 1px solid black; padding: 0 2px;">X: SM PL BAY DOORS</span></li> </ol> |
| R13L CRTX      | <ul style="list-style-type: none"> <li>√PL BAY DR – STOP</li> <li>√PBD SW – STOP</li> <li>√MAN SEL (ten) – (no *)</li> <li>√PBD SW BYPASS – (no *)</li> </ul>  |
| R13L CRTX      | <ol style="list-style-type: none"> <li>2. AC POWER ON – ITEM 1 EXEC (*)</li> <li>√AUTO MODE SEL – (no *)</li> </ol>  |
| R13L CRTX      | <ol style="list-style-type: none"> <li>3. PL BAY DR SYS (two) – ENA</li> <li>√OP/CL STATUS (ten) – CL</li> <li>√AOS</li> </ol>   |
| R13L CRTX R13L | <p><u>OPEN C/L LATCHES 5-8 (MANUAL MODE)</u></p> <ol style="list-style-type: none"> <li>4. Select CENTER LATCHES 5-8 – ITEM 4 EXEC (*)</li> </ol>  |
| R13L CRTX R13L | <ol style="list-style-type: none"> <li>5. PL BAY DR – OP</li> <li>√CENTER LATCHES 5-8 – blank, OP (~20 sec)</li> </ol>   |
| R13L           | <ol style="list-style-type: none"> <li>6. PL BAY DR – STOP</li> </ol>  |

## OPEN REMAINING LATCHES/DOORS (AUTO MODE)

- |           |  |
|-----------|--|
| R13L CRTX | <ol style="list-style-type: none"> <li>7. AUTO MODE SEL – ITEM 3 EXEC (*)</li> <li>8. PL BAY DR – OP</li> <li>√CENTER LATCHES 9-12 – blank, OP (~20 sec)</li> <li>√CENTER LATCHES 1-4,13-16 (two) – blank, OP (~20 sec)</li> <li>√STBD FWD,AFT LATCHES (two) – blank, OP (~30 sec)</li> <li>√DOOR – RDY, blank, OP (~63 sec)</li> <li>√PORT FWD,AFT LATCHES (two) – blank, OP (~30 sec)</li> <li>√DOOR – RDY, blank, OP (~63 sec)</li> </ol> |
| R13L      | <ol style="list-style-type: none"> <li>9. PL BAY DR – STOP</li> </ol>  |
| R13L CRTX | <p><u>POST-PLBD OPENING CLEANUP</u></p> <ol style="list-style-type: none"> <li>10. PL BAY DR SYS (two) – DSBL</li> <li>√OP/CL STATUS (ten) – OP</li> </ol>   |
| R13L CRTX | <ol style="list-style-type: none"> <li>11. AC POWER OFF – ITEM 2 EXEC (*)</li> <li>12. SM, OPS 201 PRO (if PASS SM)</li> </ol>   |
| R13L CRTX | <p><span style="border: 1px solid black; padding: 0 2px;">X: SM ANTENNA</span></p>   |
| A7U       | <ol style="list-style-type: none"> <li>13. After floodlights ON &gt; 10 min:<br/>PL BAY FLOOD (all) – OFF</li> </ol>   |

## MANUAL PLBD OPENING PROCEDURE

- |                     |  |
|---------------------|--|
| MS CRTX             | <ol style="list-style-type: none"> <li>1. SM, OPS 202 PRO or <span style="border: 1px solid black; padding: 0 2px;">BFS, SM 63 PL BAY DOORS</span><br/><span style="border: 1px solid black; padding: 0 2px;">X: SM PL BAY DOORS</span></li> </ol> |
| R13L CRTX           | <ul style="list-style-type: none"> <li>√PL BAY DR – STOP</li> <li>√PBD SW – STOP</li> <li>√MAN SEL (ten) – (no *)</li> <li>√PBD SW BYPASS – (no *)</li> </ul>  |
| R13L CRTX           | <ol style="list-style-type: none"> <li>2. AC POWER ON – ITEM 1 EXEC (*)</li> <li>√AUTO MODE SEL – (no *)</li> </ol>  |
| R13L CRTX           | <ol style="list-style-type: none"> <li>3. PL BAY DR SYS (two) – ENA</li> <li>√OP/CL STATUS (ten) – CL</li> <li>√AOS</li> </ol>   |
| R13L CRTX R13L CRTX | <p><u>OPEN C/L LATCHES</u></p> <ol style="list-style-type: none"> <li>4. Select CENTER LATCHES 5-8 – ITEM 4 EXEC (*)</li> </ol>  |
| R13L CRTX R13L CRTX | <ol style="list-style-type: none"> <li>5. PL BAY DR – OP</li> <li>√CENTER LATCHES 5-8 – blank, OP (~20 sec)</li> </ol>   |
| R13L CRTX R13L CRTX | <ol style="list-style-type: none"> <li>6. PL BAY DR – STOP</li> <li>7. Deselect CENTER LATCHES 5-8 – ITEM 4 EXEC (no *)</li> <li>8. Select CENTER LATCHES 9-12 – ITEM 5 EXEC (*)</li> </ol>  |
| R13L CRTX R13L CRTX | <ol style="list-style-type: none"> <li>9. PL BAY DR – OP</li> <li>√CENTER LATCHES 9-12 – blank, OP (~20 sec)</li> </ol>  |
| R13L CRTX R13L CRTX | <ol style="list-style-type: none"> <li>10. PL BAY DR – STOP</li> <li>11. Deselect CENTER LATCHES 9-12 – ITEM 5 EXEC (no *)</li> <li>12. Select CENTER LATCHES 1-4,13-16 – ITEM 6,7 EXEC (*)</li> </ol>   |
| R13L CRTX R13L CRTX | <ol style="list-style-type: none"> <li>13. PL BAY DR – OP</li> <li>CENTER LATCHES 1-4,13-16 (two) – blank, OP (~20 sec)</li> </ol>   |
| R13L CRTX           | <ol style="list-style-type: none"> <li>14. PL BAY DR – STOP</li> <li>15. Deselect CENTER LATCHES 1-4,13-16 – ITEM 6,7 EXEC (no *)</li> </ol>   |

**PLBD OPENING (Cont)**

- R13L 16. OPEN STBD FWD, AFT LATCHES & DOOR  
 CRTX 17. Select STBD FWD, AFT LATCHES – ITEM 8,9 EXEC (\*)  
 R13L 17. PL BAY DR – OP  
 CRTX √STBD FWD, AFT LATCHES (two) – blank, OP (~30 sec)  
 R13L 18. PL BAY DR – STOP  
 CRTX 19. Deselect STBD FWD, AFT LATCHES – ITEM 8,9 EXEC (\*)  
 R13L 20. Select STBD DOOR – ITEM 10 EXEC (\*)  
 CRTX 21. PL BAY DR – OP  
 R13L √STBD DOOR – RDY, blank, OP (~63 sec)  
 CRTX 22. PL BAY DR – STOP  
 R13L 23. Deselect STBD DOOR – ITEM 10 EXEC (\*)  
 CRTX
- R13L 24. OPEN PORT FWD, AFT LATCHES & DOOR  
 CRTX 25. Select PORT FWD, AFT LATCHES – ITEM 11,12 EXEC (\*)  
 R13L 25. PL BAY DR – OP  
 CRTX √PORT FWD, AFT LATCHES (two) – blank, OP (~30 sec)  
 R13L 26. PL BAY DR – STOP  
 CRTX 27. Deselect PORT FWD, AFT LATCHES – ITEM 11,12 EXEC (no \*)  
 R13L 28. Select PORT DOOR – ITEM 13 EXEC (\*)  
 CRTX 29. PL BAY DR – OP  
 R13L √PORT DOOR – RDY, blank, OP (~63 sec)  
 CRTX 30. PL BAY DR – STOP  
 R13L 31. Deselect PORT DOOR – ITEM 13 EXEC (no \*)  
 CRTX

- R13L 32. POST-PLBD OPENING CLEANUP  
 CRTX 32. PL BAY DR SYS (two) – DSBL  
 √OP/CL STATUS (ten) – OP  
 33. AC POWER OFF – ITEM 2 EXEC (\*)  
 34. SM, OPS 201 PRO (if PASS SM)  
 X: SM ANTENNA  
 A7U 35. After floodlights ON > 10 min:  
 PL BAY FLOOD (all) – OFF

FUNCTION	PLBD CONTROL								PLBD DISPLAY PL MDM										
	Ref: MA73C:C&D for MCA cbs																		
	MTR 1				MTR 2				C	C	O	O	C	R	R	R	O		
	AC/MCA	CNTL	MDM	SYS	AC/MCA	CNTL	MDM	SYS	A	B	A	B	A	B	C				
LATCH																			
5-8	1/MID3	AB3/AB2	PL1	2	3/MID2	CA3/CA1	PL2	1	1	2	1	2							
9-12	1/MID1	AB3/AB1	PL1	1	3/MID4	CA3/CA2	PL2	2	1	2	1	2							
1-4	1/MID3	AB3/AB2	PL1	2	3/MID2	CA3/CA1	PL2	1	1	2	1	2							
13-16	3/MID4	CA3/CA2	PL2	2	2/MID2	BC3/BC1	PL1	1	2	1	2	1							
S FWD	1/MID1	AB3/AB1	PL1	1	2/MID4	BC3/BC2	PL2	2	1	2	1	2							
S AFT	3/MID4	CA3/CA2	PL2	2	2/MID2	BC3/BC1	PL1	1	2	1	2	1							
S DOOR	1/MID1	AB3/AB1	PL1	1	2/MID4	BC3/BC2	PL2	2							1	1	2	2	1
															2	1	2	2	2
P FWD	1/MID1	AB3/AB1	PL1	1	2/MID4	BC3/BC2	PL2	2	1	2	1	2							
P AFT	1/MID3	AB3/AB2	PL1	2	3/MID2	CA3/CA1	PL2	1	1	2	1	2							
P DOOR	3/MID4	CA3/CA2	PL2	2	2/MID2	BC3/BC1	PL1	1							2	1	1	2	2
															1	1	1	2	1

# MS AFT DECK BACKOUT ACTIVITIES

## NOTE

WAIT FOR GO FROM CDR OR PLT BEFORE STARTING ANY ACTIVITY ON THIS PAGE

TIME (ET)	MS AFT ACTIONS
00:01	C6 LEH O2 vlv (four) – CL
00:02	<u>CONFIG FOR PLBD OPENING</u> [ 1 ]
00:20	<u>SPECIALIST SEAT EGRESS</u>
00:30	<u>FDF/COMM CONFIG</u> [ 8 ]
00:38	<u>CLOTHING CONFIG</u> [ 10 ]
00:40	If reqd, PAYLOAD REACT (PL OPS, <u>DEORBIT PREP</u> ) or PAYLOAD REACTIVATION (SODF: ASSY OPS: <u>DEORBIT PREP</u> )
00:47	<u>RMS PNL LT, TEMP MON, HTR ACT, OBSS, C/W</u> [ 13 ], 2-16
01:20	<u>ON-ORBIT HTR CONFIG</u> [ 17 ], 2-16
01:42	<u>SPECIALIST SEAT REMOVAL/STOWAGE</u>

<u>CONFIG FOR PLBD OPENING</u> [ 1 ]	
	<u>4: BFS, SM 63 PL BAY DOORS</u>
	<u>SET UP LIGHTS</u>
A6U	ANNUN BUS SEL – MNC
	<b>NOTE</b>
	Minimum operating time for PLB Floodlights: 10 min. Lights must be off for minimum of 10 min UNBLOCKED, 16 min BLOCKED prior to reuse. ~3 min to full bright
A7U	PL BAY FLOOD AFT STBD – <input type="checkbox"/>
	PORT – <input type="checkbox"/>
	MID STBD – <input type="checkbox"/>
	PORT – <input type="checkbox"/>
	FWD STBD – <input type="checkbox"/>
	PORT – <input type="checkbox"/>
	BHD – <input type="checkbox"/>
	Record MET ____ / ____ : ____ : ____
	* If PLB Floodlight not ON to full bright within 5 min: *
	* (Aff) PL BAY FLOOD – OFF *
	<u>CONFIG STBD RMS/OBSS</u>
A8L	STBD RMS HTR (two) – AUTO
R12 (OPP)	cb OBSS SW PWR CB1 – cl
	OBSS SW PWR – ON
(OBSS)	RSC PWR – ON

<u>FDF/COMM CONFIG</u> [ 8 ]	
	<u>COMM CONFIG</u>
	Unstow: Headsets, Handheld Mics and/or Wireless Comm if flown
	If WCCS, perform STD WCCS CONFIG (ORB OPS, <u>COMM/INST</u> ) or see <u>WCCS COMM PLAN</u> (Cue Card)
	If flight deck Handheld Mic/speaker operation:
R10	MS AUD PWR – AUD/TONE
	A/G 1 – T/R, tw-2
	A/G 2 – RCV, tw-2
	A/A – RCV, tw-2
	ICOM A – T/R, tw-2
	ICOM B – RCV, tw-2
	XMIT/ICOM MODE – PTT/PTT
A13	OS AUD SPKR PWR – SPKR/MIC
	MSTR SPKR VOL – 8
A11	MS COMM CCU PWR – OFF
	Connect Handheld Mic to CCU
	MS COMM CCU PWR – ON
R6,L5	CCU PWR – OFF
A1L	S-BD PM MODE – TDRS DATA
	NSP CODING (two) – ON
	OCA SETUP (ORB OPS, <u>PGSC</u> ) A/G 2 MODE
	OCA S-BAND MODEM (MFX) ACTIVATION (ORB OPS, <u>PGSC</u> )
	COLOR PRINTER UNSTOW AND ASSEMBLE (ORB OPS, <u>PGSC</u> )
O19	TV PWR – OFF
L10 (VTR)	ON/STANDBY – PRESS (red LED on)
(VIP)	PWR – OFF (LED off)
(MUX)	VTR/CC PWR – OFF (LED off)
	<u>FDF CONFIG</u>
	Stow:
	ENT
	ENT PKT
	ENT Cue Cards
	Unstow (if reqd):
	Deploy Orbit Cue Cards

<u>CLOTHING CONFIG</u> [ 10 ]	
	Doff/stow:
	Harness, Boots, ACES, UCD (if not used)
	Remove radiation dosimeter from ACES and insert in inflight garments
	Doff, stow in Wet Trash (if used):
	UCD (clamp)
	Emesis Bag (unstow new bag)

(Cont next page)

## Back of MS AFT DECK BACKOUT ACTIVITIES

RMS PNL LTS, TEMP MON, HTR ACT, C/W **13**

MA73C:F           RMS PNL LTS, TEMP MON, HTR ACT (if RMS on board)  
 A8L                cb RMS PRI  $\Phi$ A – cl  
                     RMS PWR – PRI (MA tone)  
                     SM 94 PDRS CONTROL (MA, GPC DATA It on)  
                     I/O ON – ITEM 5 EXEC (\*)  
 A8U                SAFING – CANCEL (tb-bp) ( $\sqrt$ GPC DATA It off)  
 A8L                PORT RMS HTR A – AUTO

C/W

R13U		
PARAMETER NAME	C/W CH	ENA/INH
MPS He REG P C	39	INH
L	49	INH
R	59	INH
HYD P 1	99	INH
2	109	INH
3	119	INH

ON-ORBIT HTR CONFIG **17**

R2                BLR PWR (three) – OFF  
 R4                HYD BK HTR (three) – OFF  
 L1                 $\sqrt$ HI LOAD EVAP       – OFF  
                     DUCT HTR sel   – OFF  
 A12              HYD HTR RUD SPD BK B – AUTO  
    $\sqrt$ A – OFF  
   BDY FLP B     – AUTO  
    $\sqrt$ A             – OFF  
   ELEV B        – AUTO  
    $\sqrt$ A             – OFF  
   AFT FUS B     – AUTO  
    $\sqrt$ A             – OFF  
 A14              RCS/OMS HTR FWD RCS   – B AUTO  
    $\sqrt$ L POD        – A OFF  
   L POD         – B AUTO  
    $\sqrt$ R POD        – A OFF  
   R POD         – B AUTO  
   OMS CRSFD LINES – A OFF  
    $\sqrt$ OMS CRSFD LINES – B AUTO  
 R14:C            cb KU ANT HTR – cl  
                   :D            Close left to right all cbs  
                   :E            Close left to right all cbs

Block **4** deleted

Block **18** deleted

# MS MIDDECK BACKOUT ACTIVITIES

NOTE

WAIT FOR GO FROM CDR OR PLT BEFORE STARTING ANY ACTIVITY ON THIS PAGE

TIME (ET)	MS MIDDECK ACTIONS
00:20	<u>SPECIALIST SEAT EGRESS</u>
00:21	MO32M LEH O2 vlv (two) – CL MO69M LEH O2 vlv (two) – CL
00:22	<u>PRELIM MIDDECK CONFIG</u> <span style="border: 1px solid black; padding: 0 2px;">7</span>
00:40	If reqd, PAYLOAD REACT, (PL OPS, <u>DEORB PREP</u> ) or PAYLOAD REACTIVATION (SODF: ASSY OPS: DEORBIT PREP)
00:52	<u>MIDDECK CONFIG</u> <span style="border: 1px solid black; padding: 0 2px;">14</span>
01:00	<u>CLOTHING CONFIG</u> <span style="border: 1px solid black; padding: 0 2px;">15</span> , 2-18
01:40	<u>ON-ORBIT PCS 2(1) CONFIG</u> <span style="border: 1px solid black; padding: 0 2px;">19</span> , 2-18
01:42	<u>SPECIALIST SEAT REMOVAL/STOWAGE</u>
01:50	<u>AIRLOCK SETUP FOR INGRESS</u> <span style="border: 1px solid black; padding: 0 2px;">21</span> , 2-18

<u>PRELIM MIDDECK CONFIG</u> <span style="border: 1px solid black; padding: 0 2px;">7</span>	
	<u>INSTALL FILTERS</u> Unstow,install: Side Hatch UV Filter and Locking Device Pyro Box Safing Pin
	<u>COMM CONFIG</u> Unstow: Headsets, Handheld Mics and/or Wireless Comm if flown (see <u>WCCS COMM PLAN</u> (Cue Card))
	If WCCS perform STD WCCS CONFIG (ORB OPS, <u>COMM/INST</u> ) or see <u>WCCS COMM PLAN</u> (Cue Card)
MO42F	If middeck Handheld Mic/speaker operation: MIDDECK SPKR AUD SPKR PWR – SPKR/MIC A/G 1 – T/R, tw-2 A/G 2 – RCV, tw-2 A/A – RCV, tw-2 ICOM A – T/R, tw-2 ICOM B – RCV, tw-2 XMIT/ICOM MODE – PTT/PTT MSTR SPKR VOL – 8
MO39M	MIDDECK COMM CCU PWR – OFF Connect Handheld Mic to CCU MIDDECK COMM CCU PWR – ON
ML31C	<u>HTR CONFIG</u> VAC VENT ISOL VLV BUS SEL – MNA NOZ HTR – ON ISOL VLV CNTL – OP (tb-OP)
	* If VAC VENT ISOL VLV CNTL tb – CL or bp: * * VAC VENT ISOL VLV BUS SEL – MNB * * CNTL – OP (tb-OP) * * If VAC VENT ISOL VLV CNTL tb still CL or bp: * * √MCC for further actions *

<u>MIDDECK CONFIG</u> <span style="border: 1px solid black; padding: 0 2px;">14</span>	
ML86B:A	<u>GALLEY ACTIVATION</u> cb MNC SPLY H2O GALLEY SPLY – cl :B cb MNA GALLEY OVEN – cl cb MNB GALLEY H2O HTR – cl
R11L:G	√SPLY H2O GALLEY SPLY VLV – OP (tb-OP)
GALLEY	H2O HTRS (two) – ON OVEN/RHS – ON
MA73C:G	cb AC3 GALLEY FAN (three) – cl Unstow,install Personal Hygiene Hose
WCS	<u>WCS ACTIVATION</u> VAC VLV – OP  Unstow Urinal Hose from Velcro strap, install hose in cradle √MODE – AUTO √CRADLE – AUTO FAN SEP SEL sw – 1 Unstow hose from cradle (√airflow) √WCS ON It – ON Stow hose in cradle √WCS ON It – OFF  Unstow,install: WCS Trash Can Mirror Urine Collection Cue Card Foot/Toe Restraint – down,locked  (Cont next page)

## Back of MS MIDDECK BACKOUT ACTIVITIES

If PRIORITY PWRDN GROUP C not reqd:  
PGSC ACTIVATION  
 (backup PGSC) PGSC ACTIVATION (ORB OPS, PGSC)

### POLE STOWAGE

Remove large Port Pin:  
 Slide back Safing Latch  
 Retract and hold Locking Pin (Ring)  
 Remove large Pin  
 Release Locking Pin (Ring)  
 Remove Stbd Pip Pin  
 Stow Pole

### FLOODLIGHT CONFIG

If TNL ADAPT flown:

ML86B:E     cb MNA FLOOD TNL ADAPT 2 – cl  
                   cb MNB FLOOD TNL ADAPT 3 – cl  
                   cb MNC FLOOD TNL ADAPT 4 – cl

ML86B:F     cb MNA FLOODS AIRLK 1     – cl  
                                   MIDDECK 9   – cl  
                   cb MNB FLOODS MIDDECK 10 – cl  
                                   AIRLK 3     – cl

ML86B:G     cb MNC FLOODS AIRLK 4     – cl  
                   cb ESS 1BC FLOOD AIRLK 2   – cl

If TNL ADAPT flown:  
                   cb ESS 1BC FLOOD TNL ADAPT 1 – cl

### CLOTHING CONFIG 15

Doff/stow:  
 Harness, Boots, ACES, UCD (if not used)

Remove radiation dosimeter from ACES and insert in inflight garments

Doff, stow in Wet Trash (if used):  
 UCD (clamp)  
 Emesis Bag (unstow new bag)

### ON-ORBIT PCS 2(1) CONFIG 19

C	L2	√O2 XOVR SYS (two)           – OP O2/N2 CNTLR VLV SYS 1(2) – CL 2(1) – AUTO
	O1	O2/N2 FLOW sel – SYS 2(1) O2
	C7	√LEH O2 SPLY vlv (two) – OP Expect possible 'S66 CAB O2(N2) FLO 2(1)' msg
MS	MO10W	14.7 CAB REG INLET SYS 2(1) vlv – OP H2O TK N2 REG INLET SYS 1(2) vlv – CL O2 REG INLET SYS 2(1) vlv       – OP
	MO69M	√LEH O2 8 vlv – CL Insert O2 Bleed Orifice Assembly into LEH O2 8 QD LEH O2 8 vlv – OP

### AIRLOCK SETUP FOR INGRESS 21

INNER	1. Equal vlv caps (two) – remove, stow
HATCH	2. √Equal vlv (two) – NORM 3. Open hatch per decal
AW18A	4. LTG FLOOD 1(3,4) – ON (as reqd)
MO13Q	5. AIRLK 2 – ON/OFF 6. √AIRLK H2O S/O vlv – OP (tb-op)
MIDDECK FLR	7. √EMU O2 ISOL vlv – CL 8. Remove, stow diffuser cap on middeck floor air fitting (mark) 9. Unstow, install bypass duct to middeck floor fitting 10. √Airflow at top of external airlock halo

If Spacehab flown and reingress desired:  
 11. Go to SPACEHAB INGRESS AFTER WAVEOFF  
       (SH OPS, ON-ORBIT)

If orbiter only and Spacehab reingress not desired:  
 12. Unstow bypass duct from Tunnel Extension wall and  
       install on middeck floor fitting

## AIRLOCK ENTRY SWITCH LIST/VERIFICATION (TIG-3:50)

### AIRLOCK

AW18A.....	3-3
AW18D .....	3-3
AW18H .....	3-3
AW82B.....	3-3

## PARTIAL ENTRY SWITCH LIST/VERIFICATION (TIG-3:10)

### LEFT SEAT

F3.....	3-4
F7.....	3-4
L,R HUD .....	3-4
F2.....	3-5
O7 .....	3-5
O13.....	3-5
L side OVHD flood ...	3-5
F1.....	3-6
F6.....	3-6
L5.....	3-6

### RIGHT SEAT

O8.....	3-7
R side OVHD flood ..	3-7
F4.....	3-7
F8.....	3-7
R2 .....	3-8
R6 .....	3-8
O17 .....	3-8

### AFT

C5 .....	3-9
C7 .....	3-9
A11 .....	3-9









### MIDDECK-FWD

MO58F.....	3-10
MO39M.....	3-10
MO52J.....	3-10
MO30F.....	3-10
MD44F.....	3-10
MD24K.....	3-10
A/L HATCH.....	3-10
MO63P	
(OV103,OV104) .....	3-10
ML86B .....	3-11

### MIDDECK-AFT

MO13Q .....	3-12
ML18F.....	3-12
ML26C .....	3-12
ML31C .....	3-12

### LEGEND

 - left	 - right
 - up	R - as reqd
 - center	 - cb close
 - down	 - cb open
 - indicates switch/display not checked during ENT SWITCH LIST/VERIFICATION. Switch/display pictorials are generic representations and are not intended to depict actual switch positions. √MCC if additional clarification reqd	

### CIRCUIT BREAKER SNAP RING

#### COLOR CODES

<u>COLOR</u>	<u>CONFIGURATION</u>
Red	Open at all times
Green	Open on orbit only
Yellow	Open ascent, close per procedure
Orange	Open orbit through entry
Blank (no ring)	Always closed or as reqd

# ENT SWITCH LIST/VERIF

## FINAL ENTRY SWITCH LIST/VERIFICATION (TIG-1:50)

### LEFT SEAT

L4.....	3-13
L1.....	3-14
L2.....	3-15
C2/C3.....	3-16
O1.....	3-17
O5.....	3-17
O6.....	3-18
O14.....	3-19
O15.....	3-19

### RIGHT SEAT

O19.....	3-20
O16.....	3-20
O9.....	3-20
R1.....	3-21
R4.....	3-21

### AFT









R10.....	3-22
R12U.....	3-22
R11L.....	3-22
R13L.....	3-23
R14.....	3-23
A1L,R.....	3-24
A12.....	3-25
A13.....	3-25
L9.....	3-26
A6L.....	3-27
A7L	
(APDS CNTL PNL) .	3-28
A15.....	3-29

### MIDDECK-FWD

MO42F.....	3-30
MO32M.....	3-30
MO69M.....	3-30
MO51F.....	3-30

### MIDDECK-AFT

MA73C.....	3-31
MO10W.....	3-32
WCS.....	3-32


<u>LEGEND</u>	
 – left	 – right
 – up	R – as reqd
 – center	 – cb close
 – down	 – cb open
 – indicates switch/display not checked during ENT SWITCH LIST/VERIFICATION. Switch/display pictorials are generic representations and are not intended to depict actual switch positions. √MCC if additional clarification reqd	

<u>CIRCUIT BREAKER SNAP RING COLOR CODES</u>	
<u>COLOR</u>	<u>CONFIGURATION</u>
Red	Open at all times
Green	Open on orbit only
Yellow	Open ascent, close per procedure
Orange	Open orbit through entry
Blank (no ring)	Always closed or as reqd





OV103



PNL AW18A

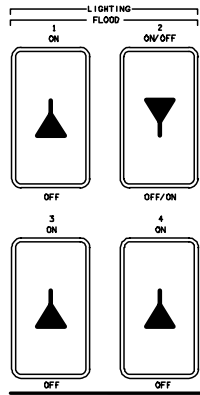



AW18A

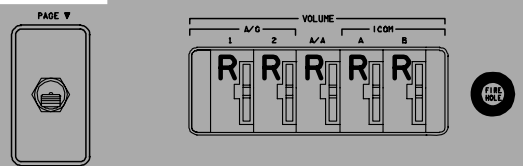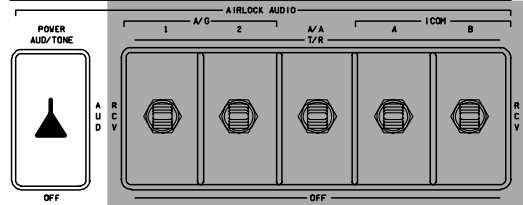

PNL AW18D

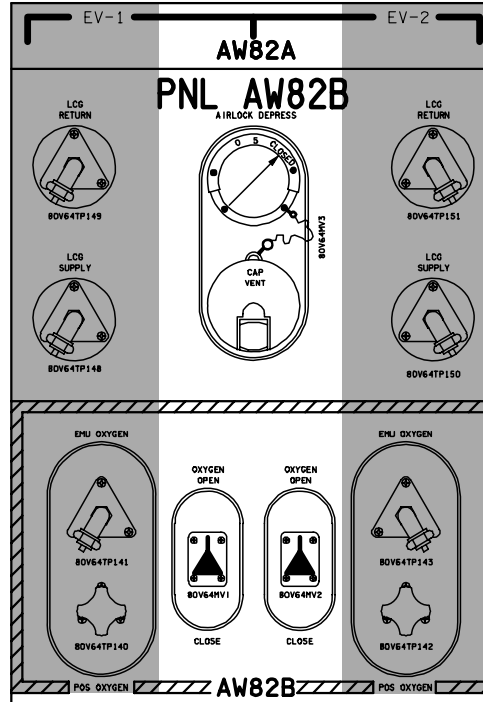
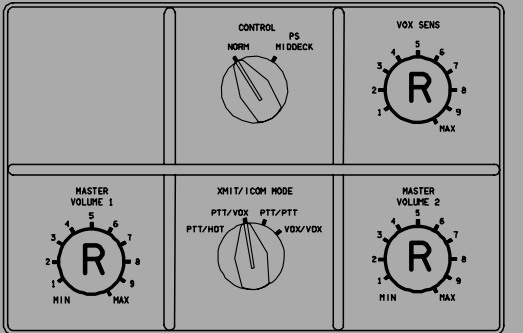


PNL AW18H

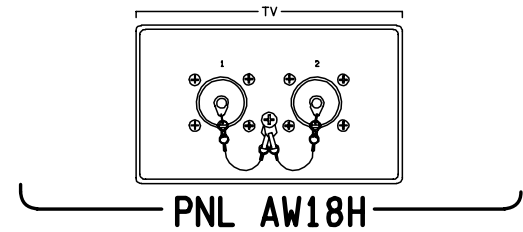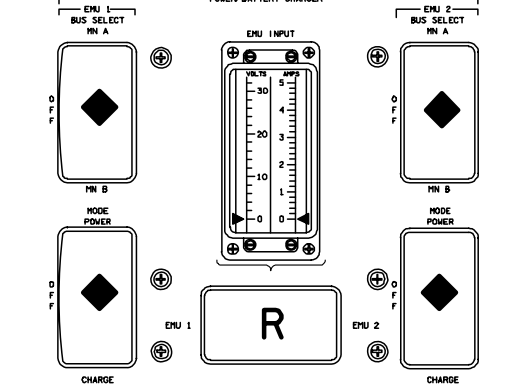


PNL AW18H


OV103

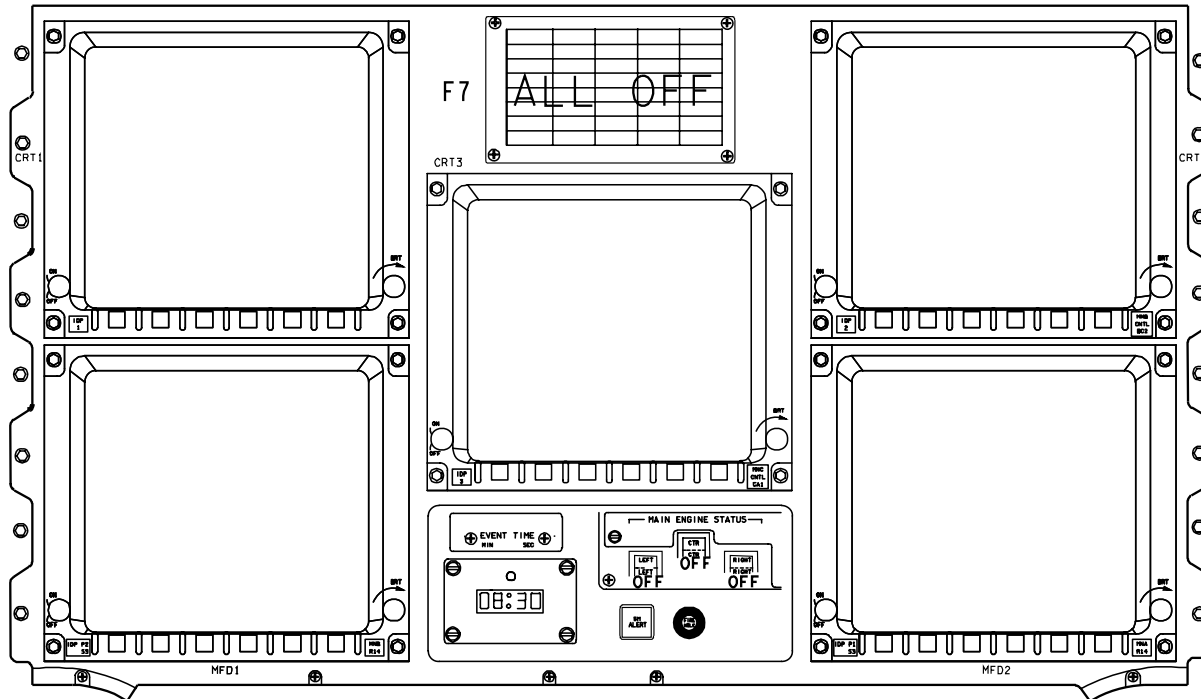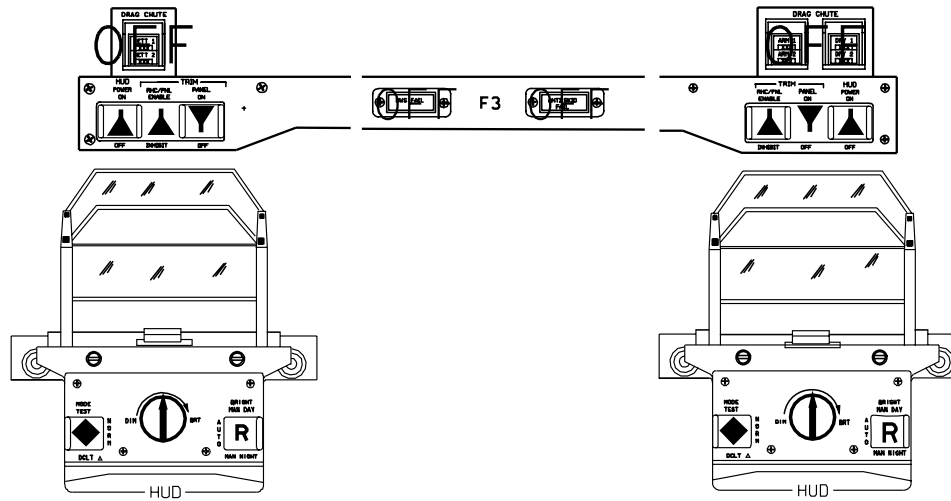

OV103

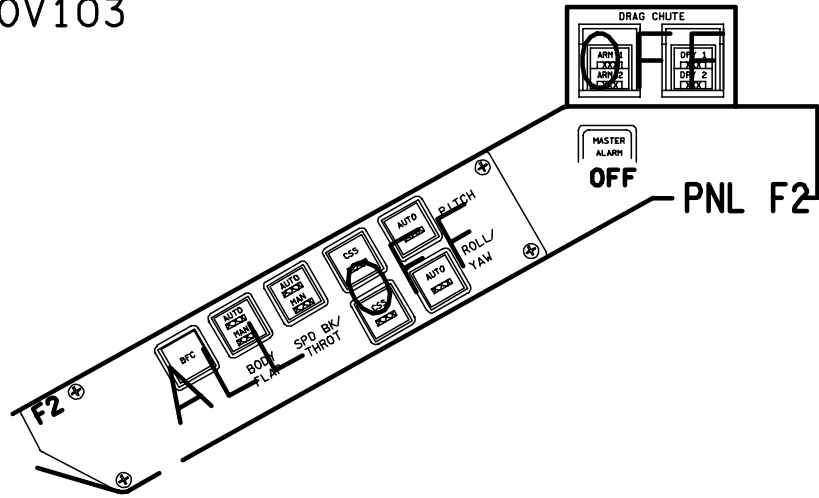


PNL 013

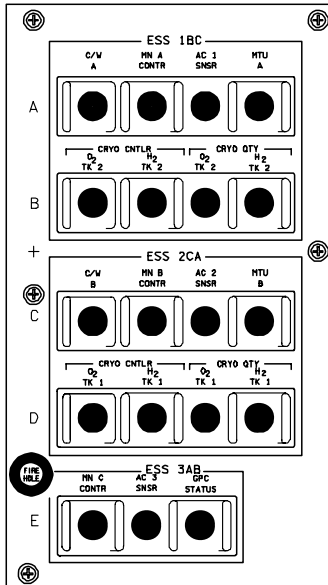

L side OVHD flood - R (MID)




PNL 07

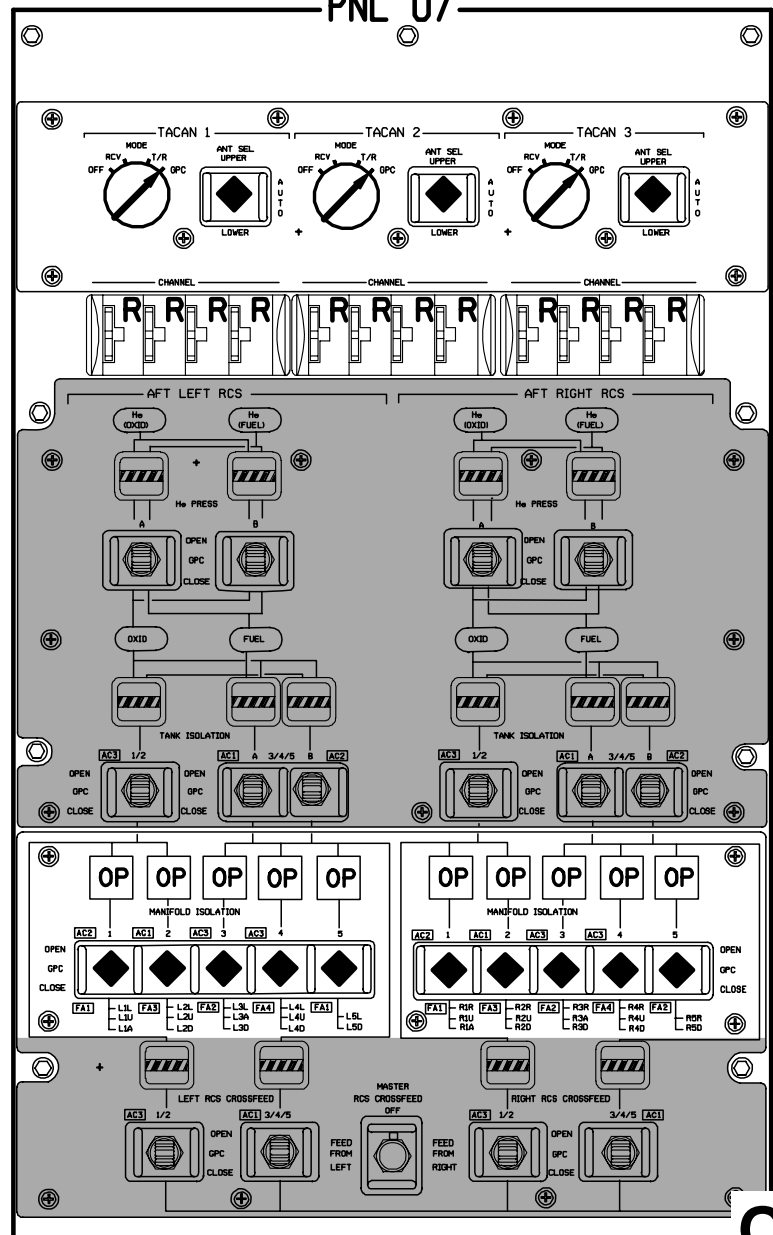


48015E305\_114, PNL 1

ALL VEH/DATE 04/28/05

OV103

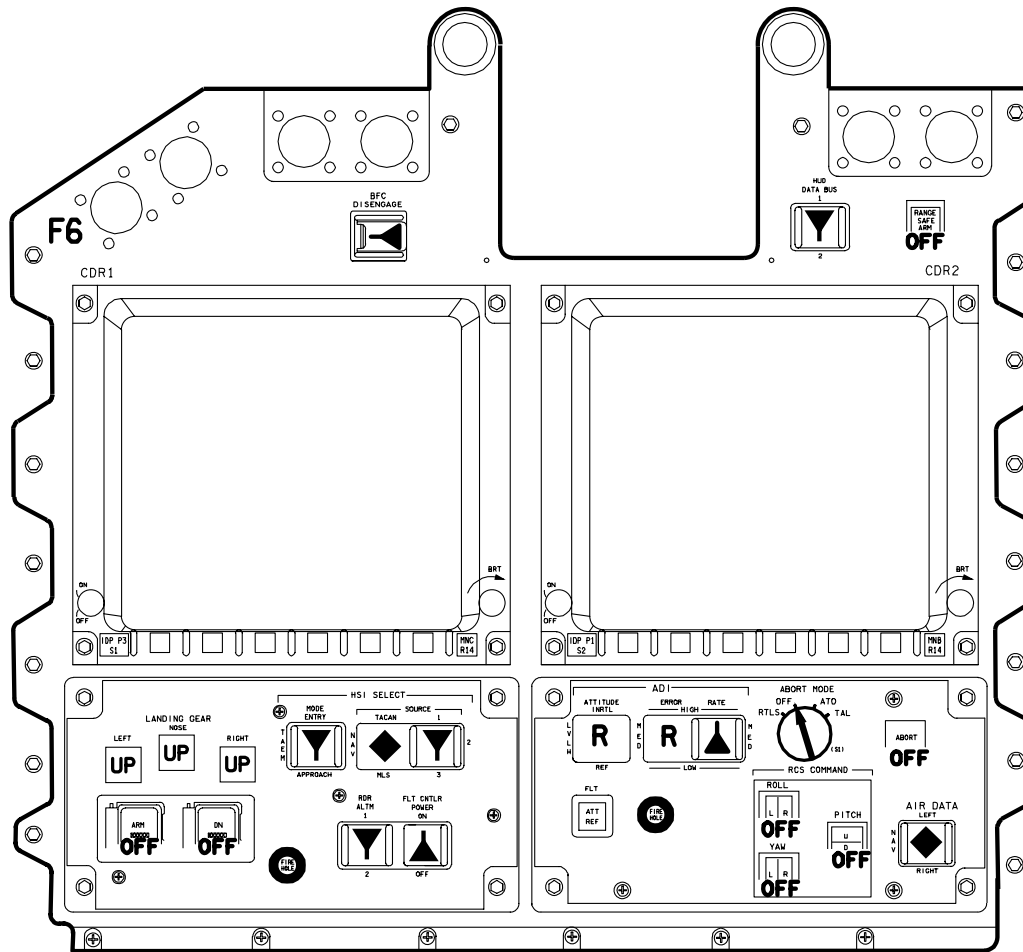

OV103

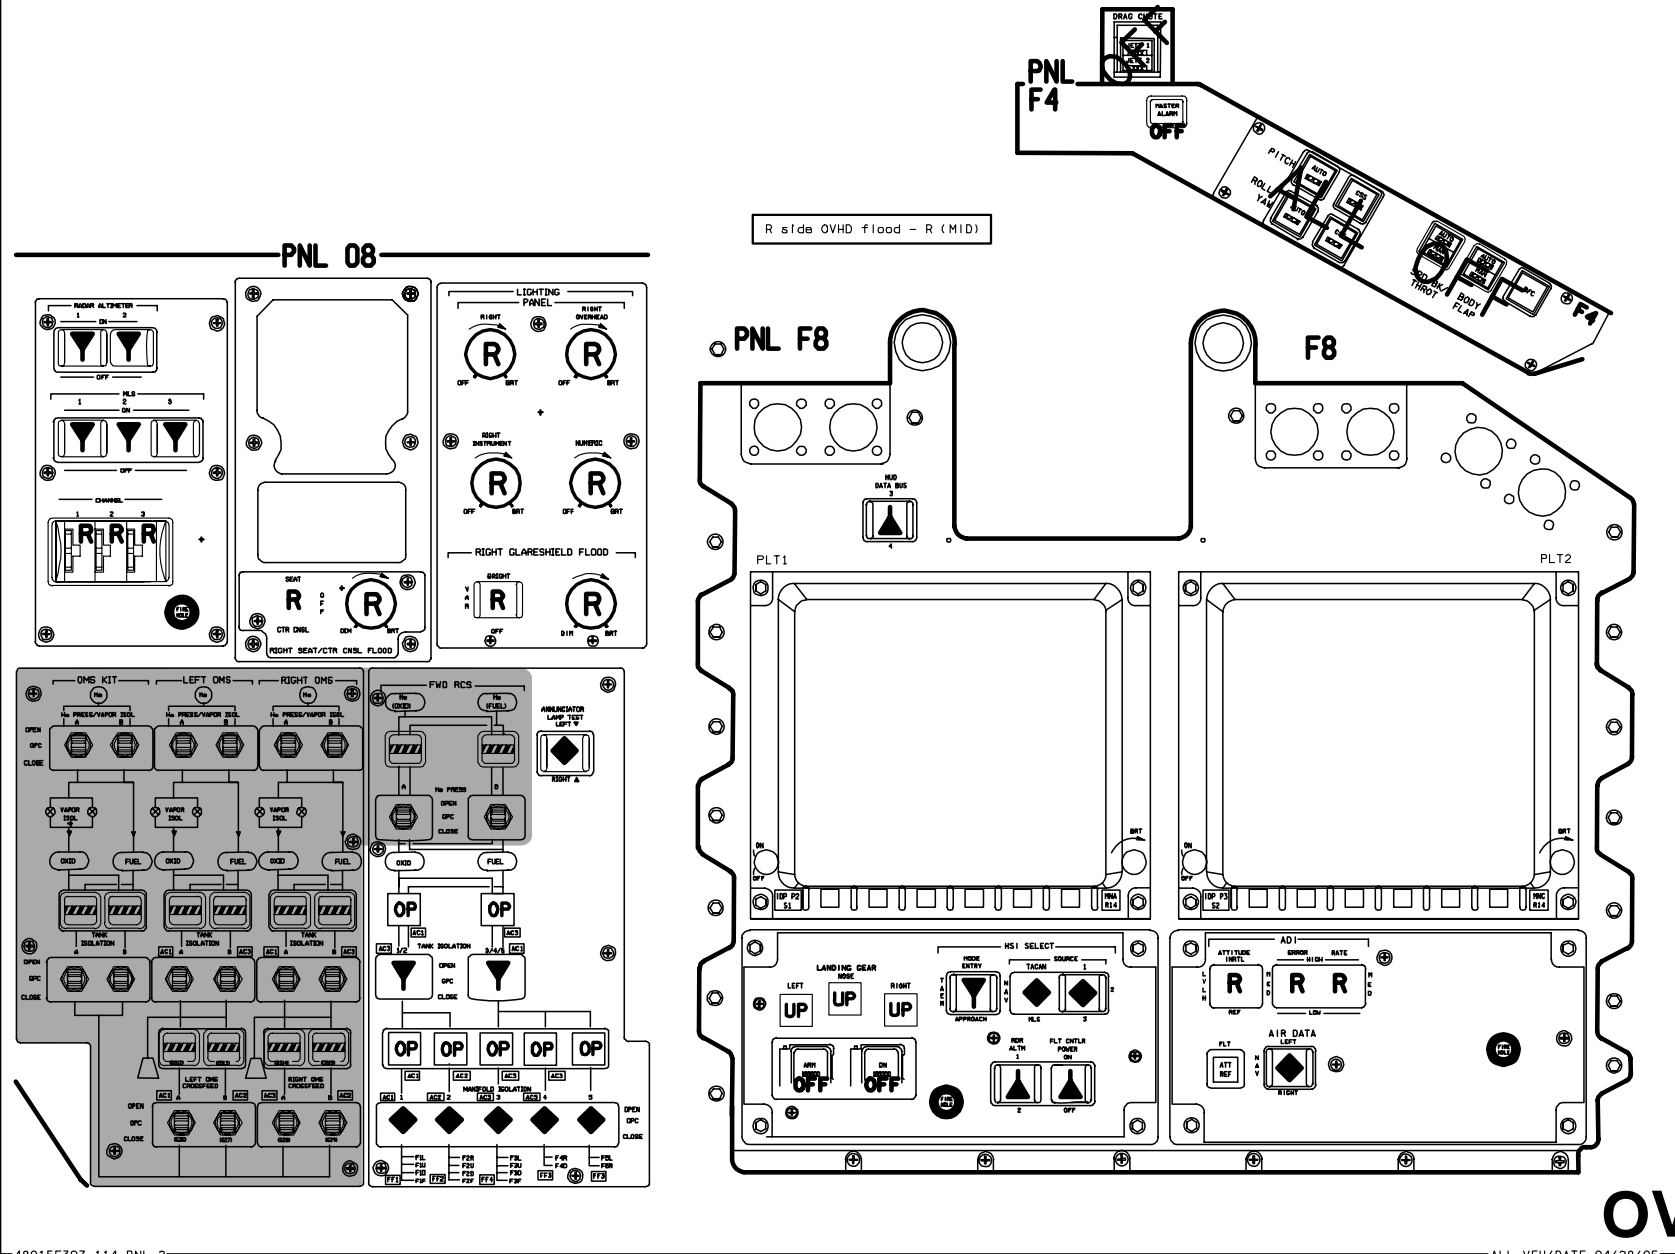

R side OVHD flood - R (MID)

48015E307\_114. PNL: 2

ALL VEH/DATE 04/28/05


OV103

(OV103) A3-7


D/O/3/GEN Q

OV103


PNL R2

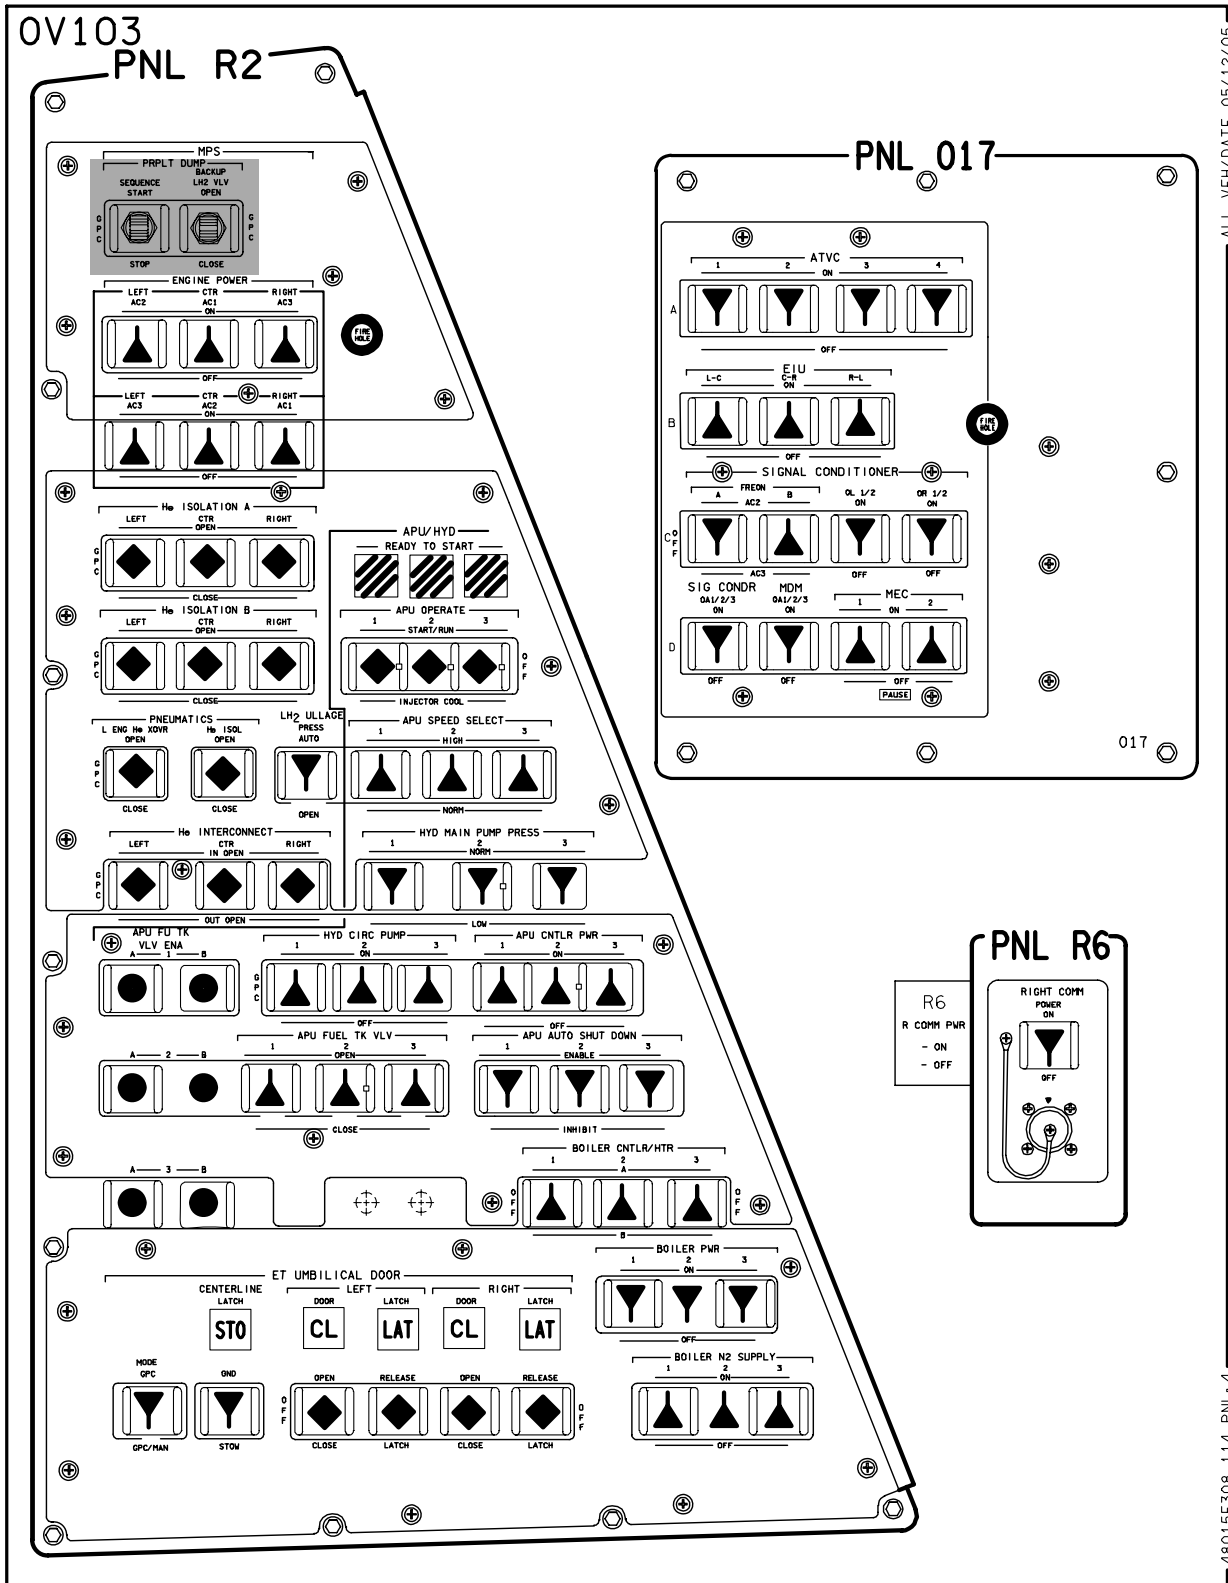

PNL 017

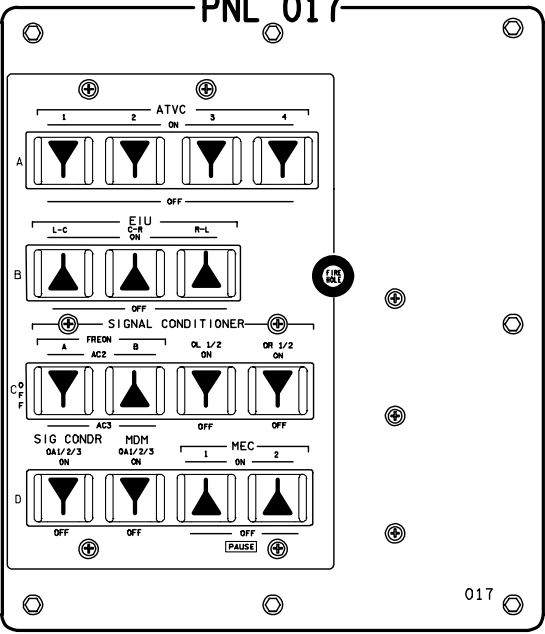

PNL R6





ALL VEH/DATE 05/12/05 48015E308\_114\_PNL R 4

OV103

(OV103) A3-8


D/O/ALL/GEN Q

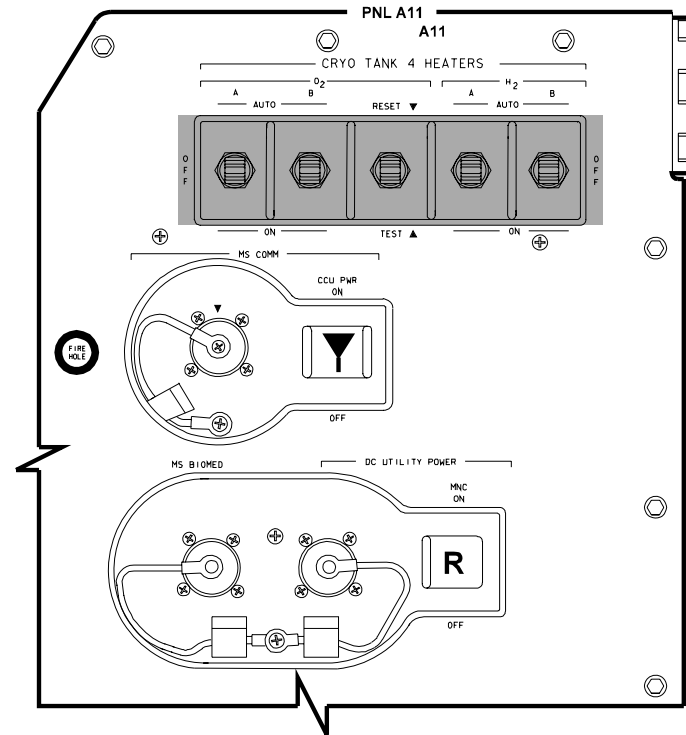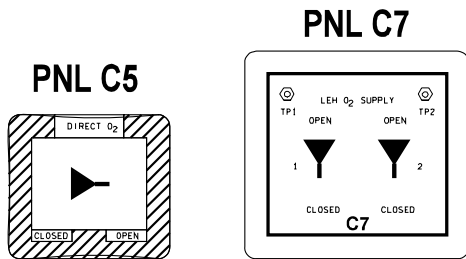


**OV103**

**AIRLOCK HATCH**


ACTUATOR HANDLE - LATCHED  
 LOCK LEVER - LOCKED  
 EQUALIZATION VLV (TWO) - NORM  
 -CAPS INSTALLED

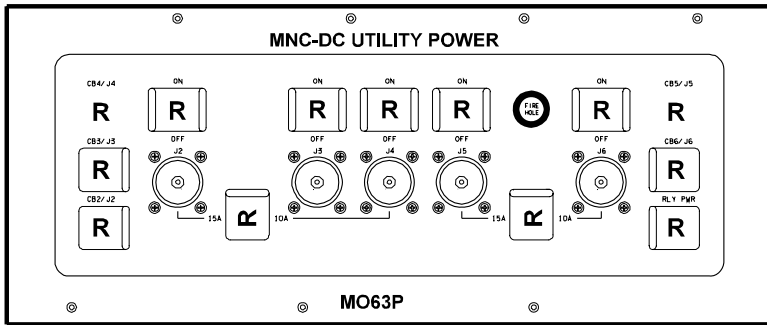


**PNL MO58F**

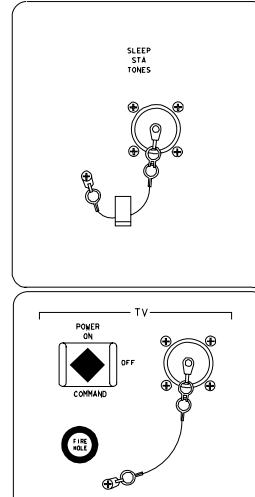


**PNL MO30F**

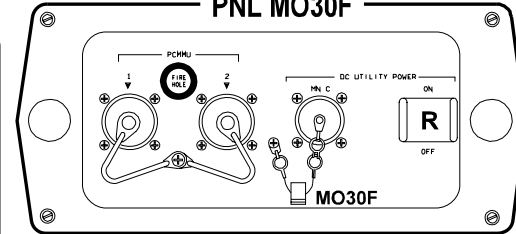


**PNL MO52J**

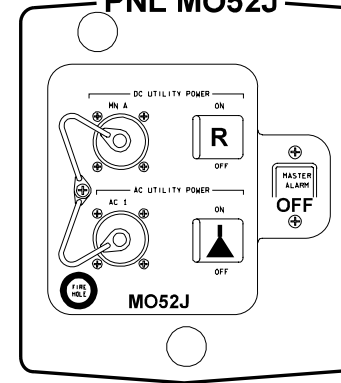

**PNL MO39M**



**PNL MD24K**




NOTE: NOT VISIBLE IF MAR FLOWN

**PNL MD44F**

CAB TEMP CNTL ACT LINKAGE - SECONDARY ACTUATOR

**PNL ML85E**

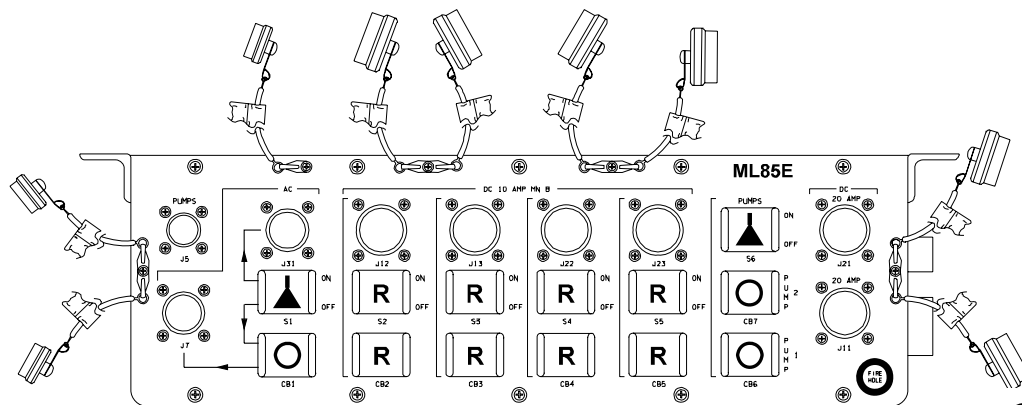


**OV103**







OV103

PNL ML86B

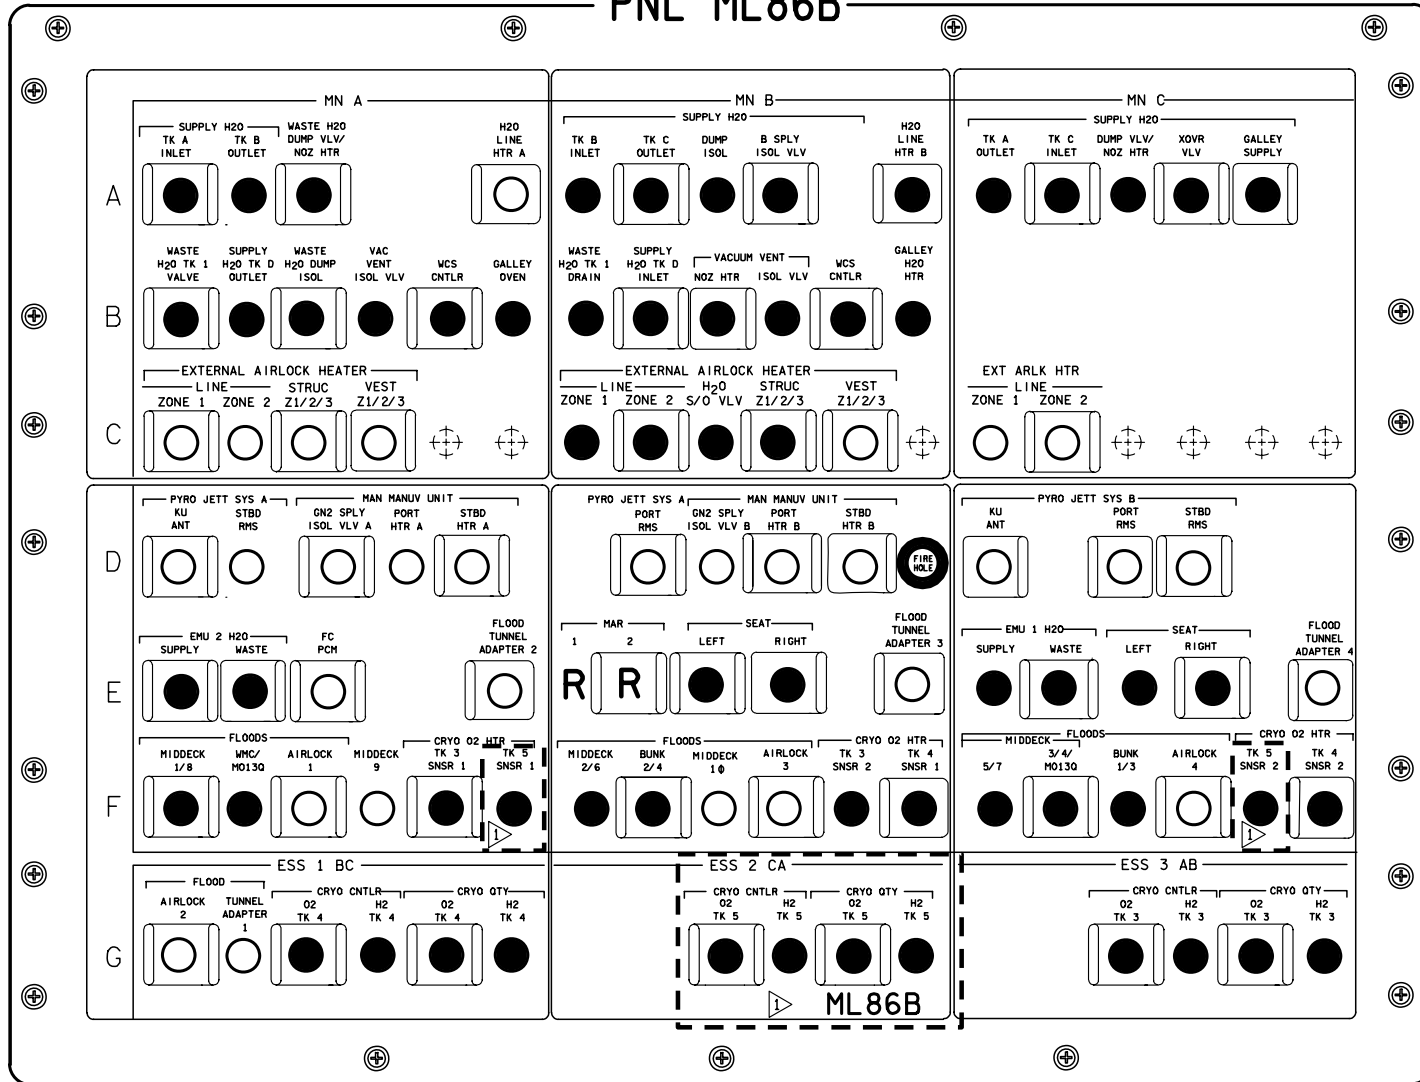


NOTE: OPEN IF TK 5 NOT FLOWN

OV103

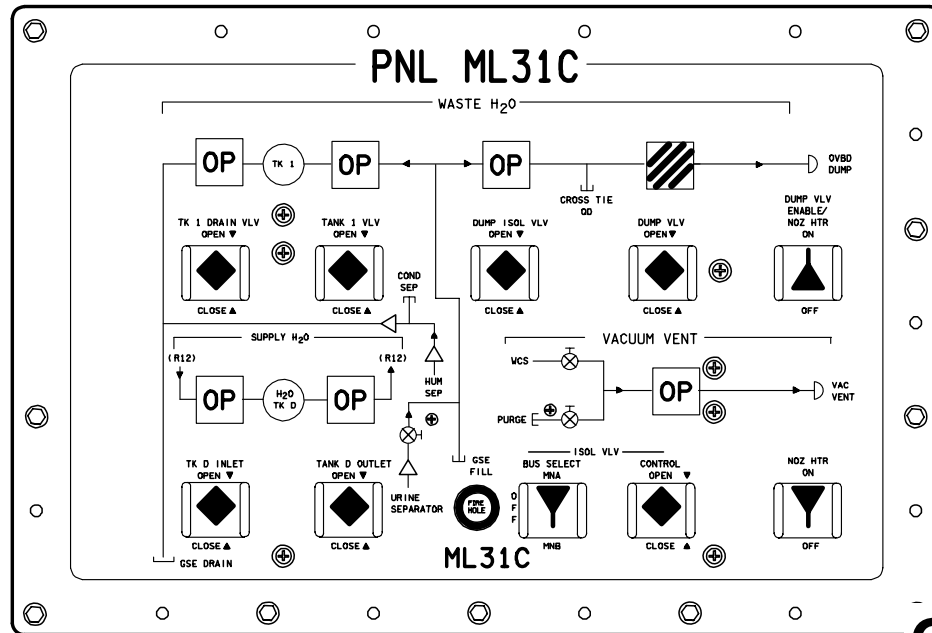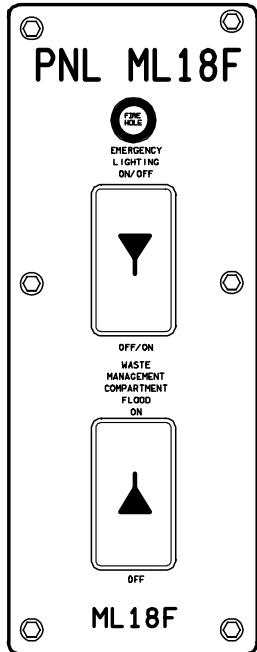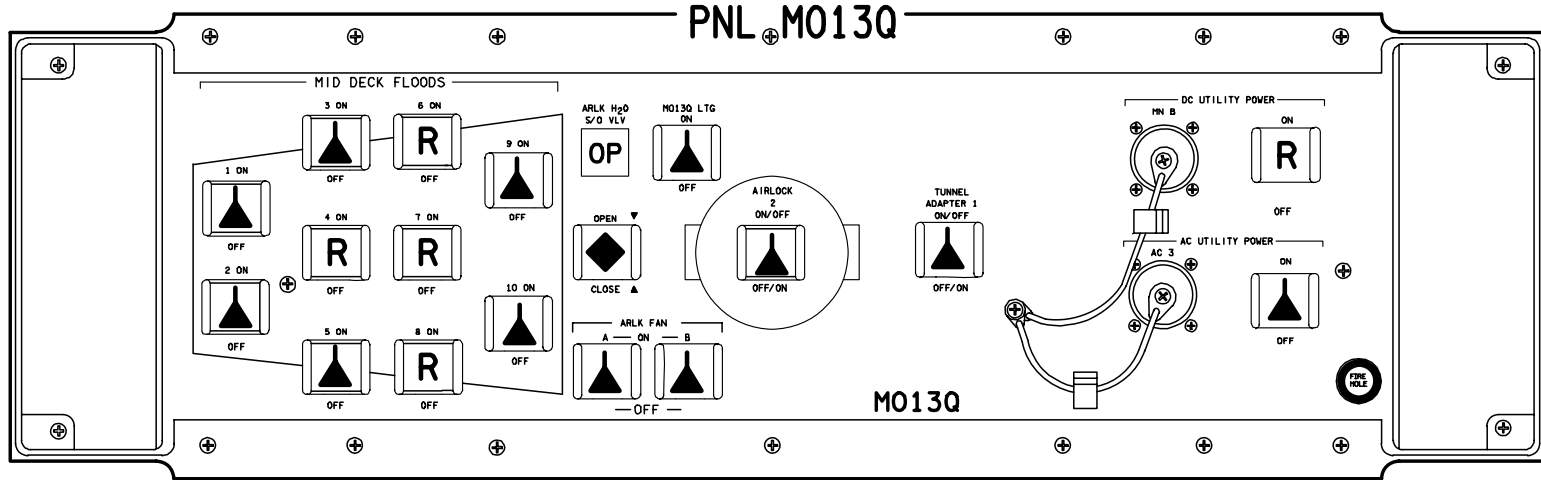


OV103

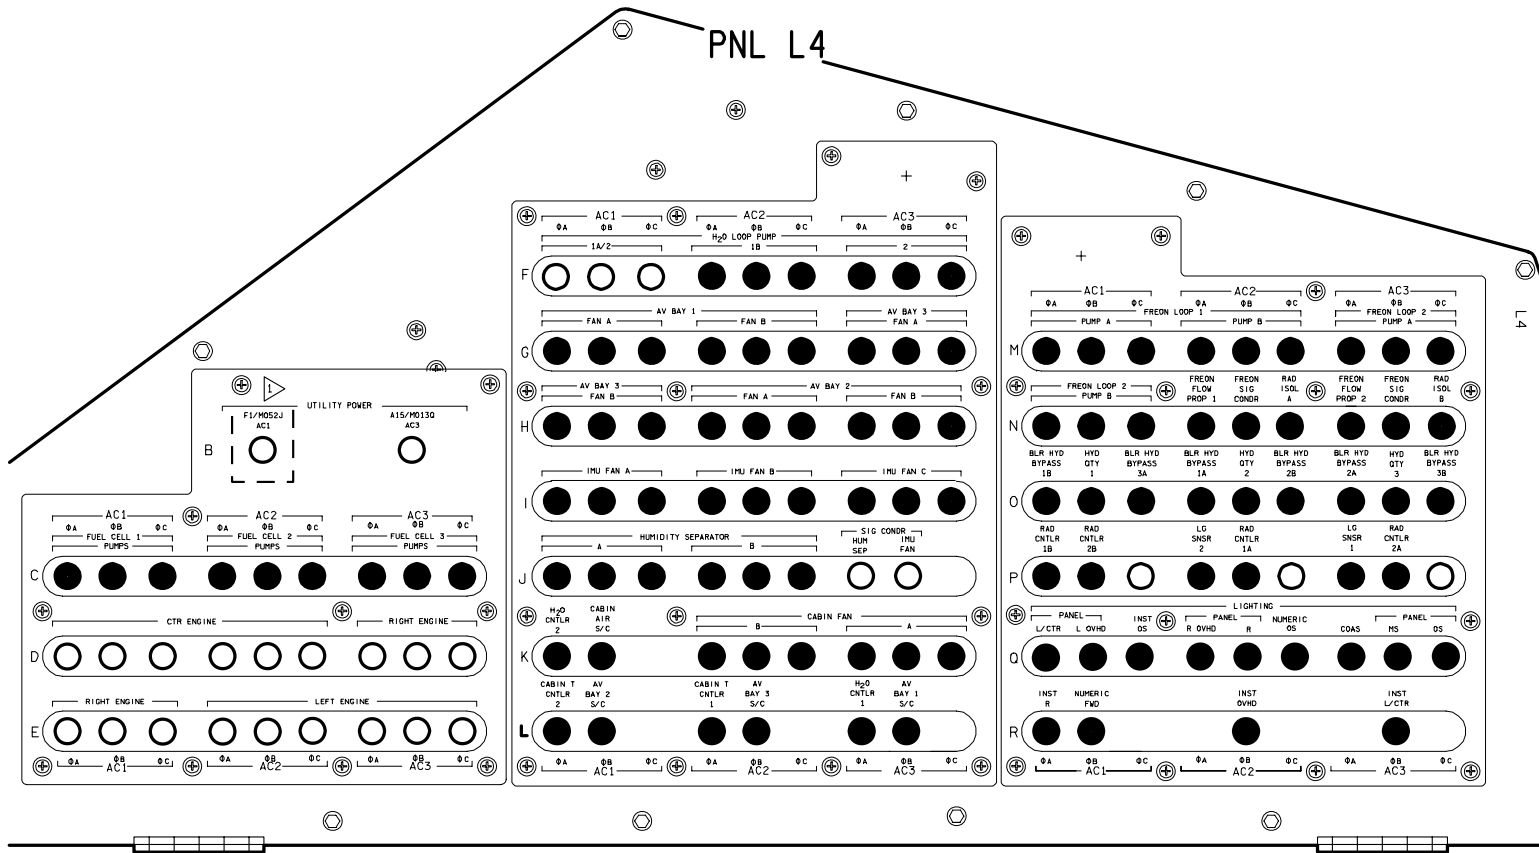

NOTE: CB CAN REMAIN CLOSED FOR AC PGSC USAGE.  
 OPEN WHEN PGSC UNPOWERED/STOWED

OV103

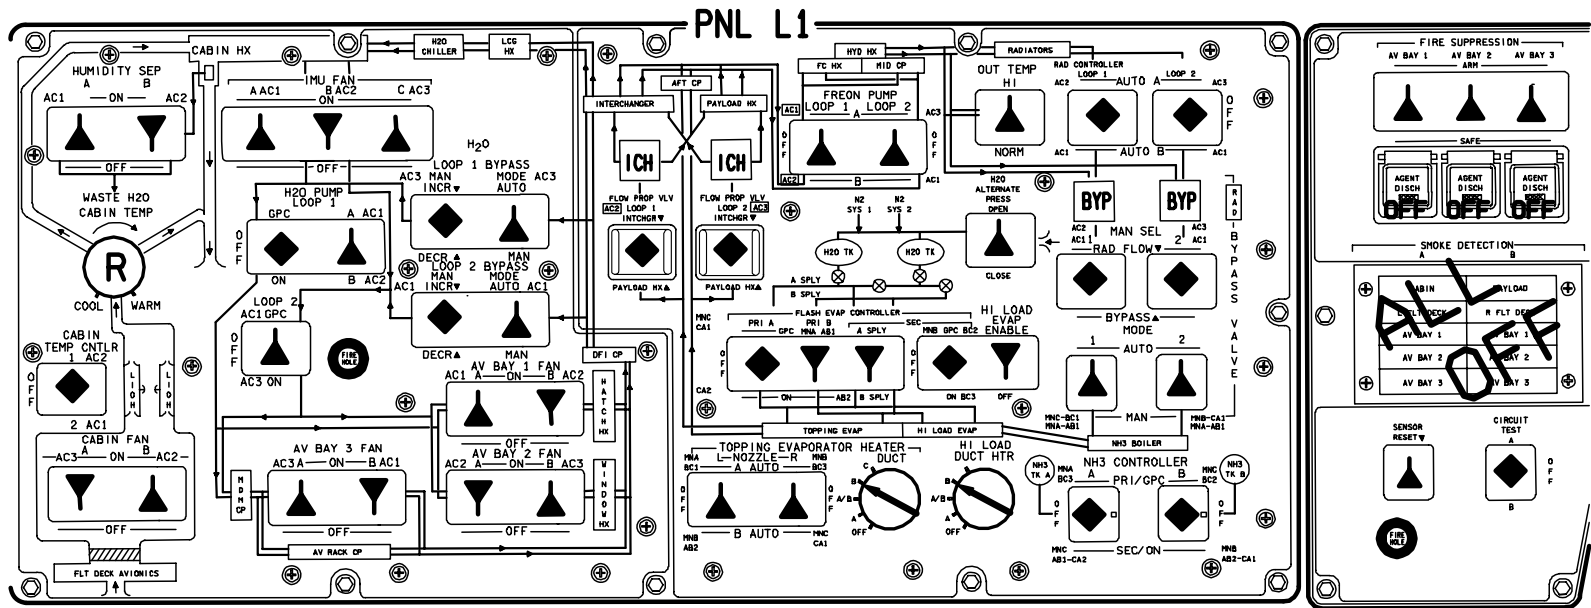

48015E314\_114, PNL 2


ALL VEH/DATE 04/28/05

OV103

(OV103) A3-14

D/O/ALL/GEN Q

OV103

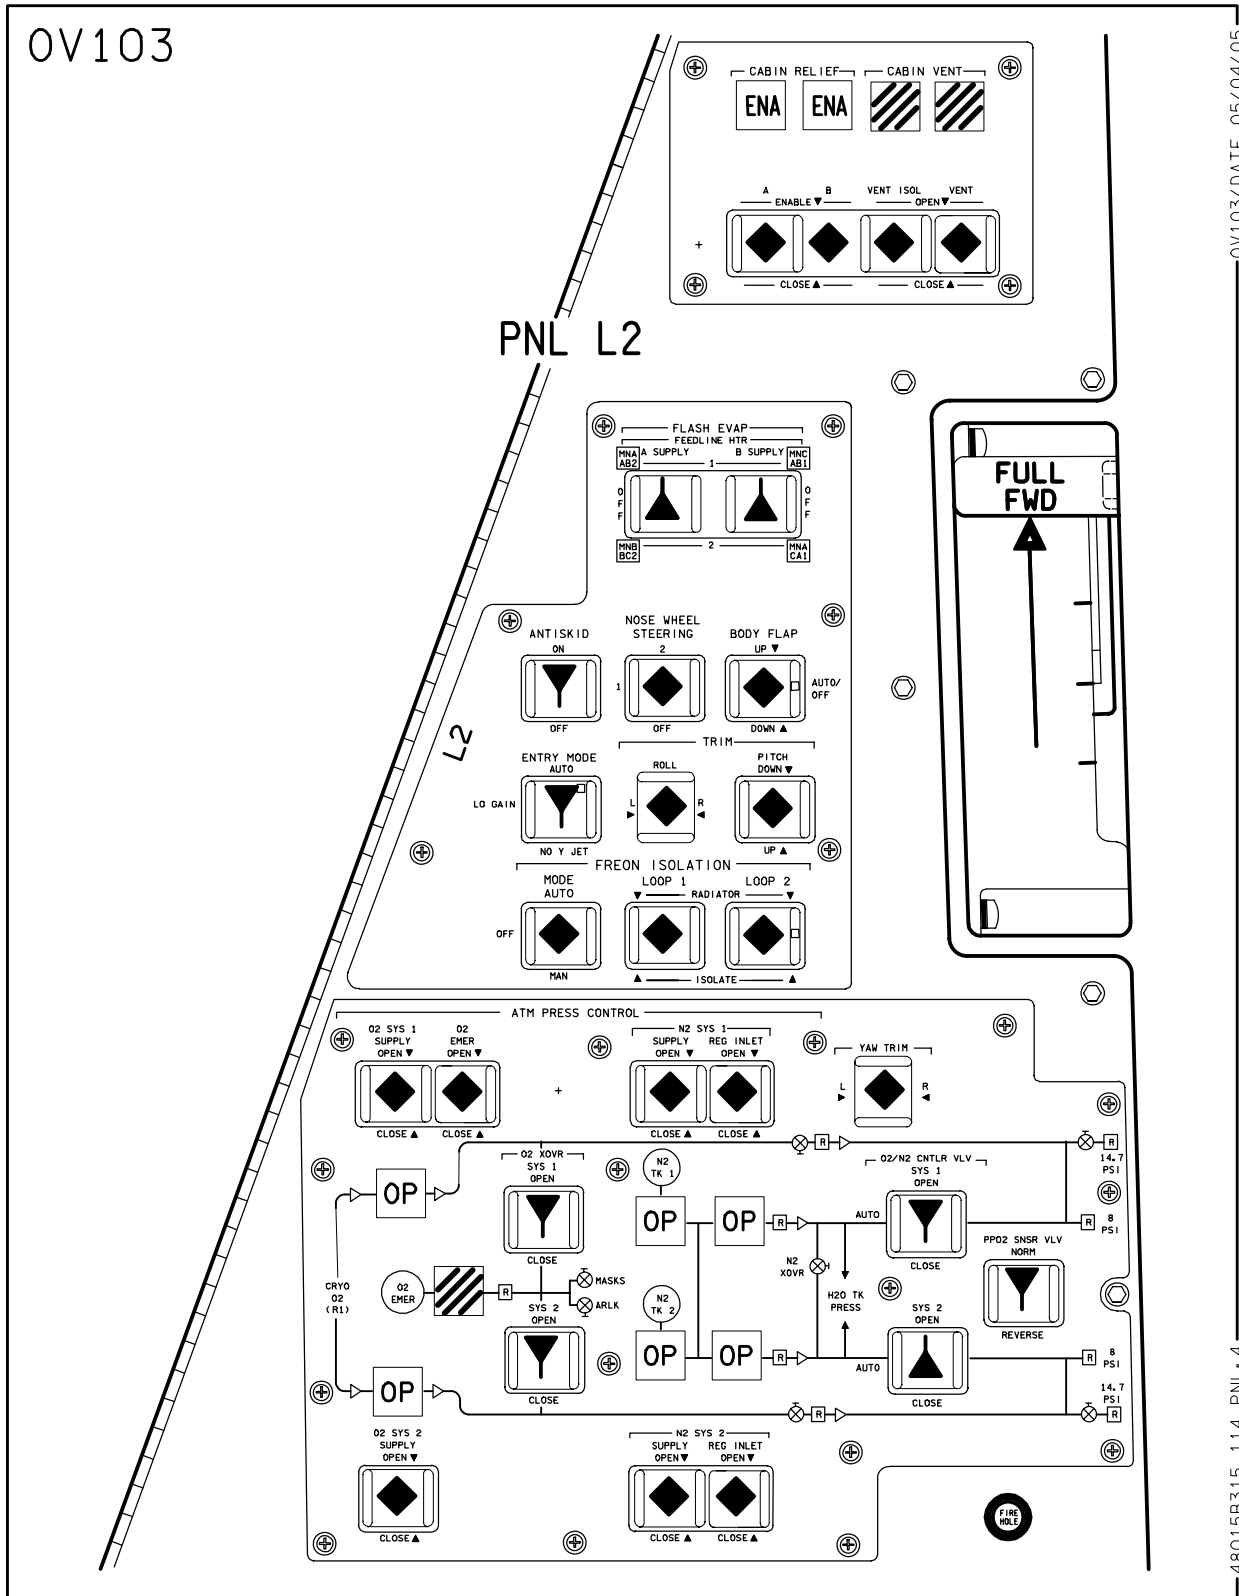

OV103/DATE 05/04/05



48015B315\_114. PNL 4

OV103



(OV103) A3-15

D/O/3/GEN Q

PNL C2/C3

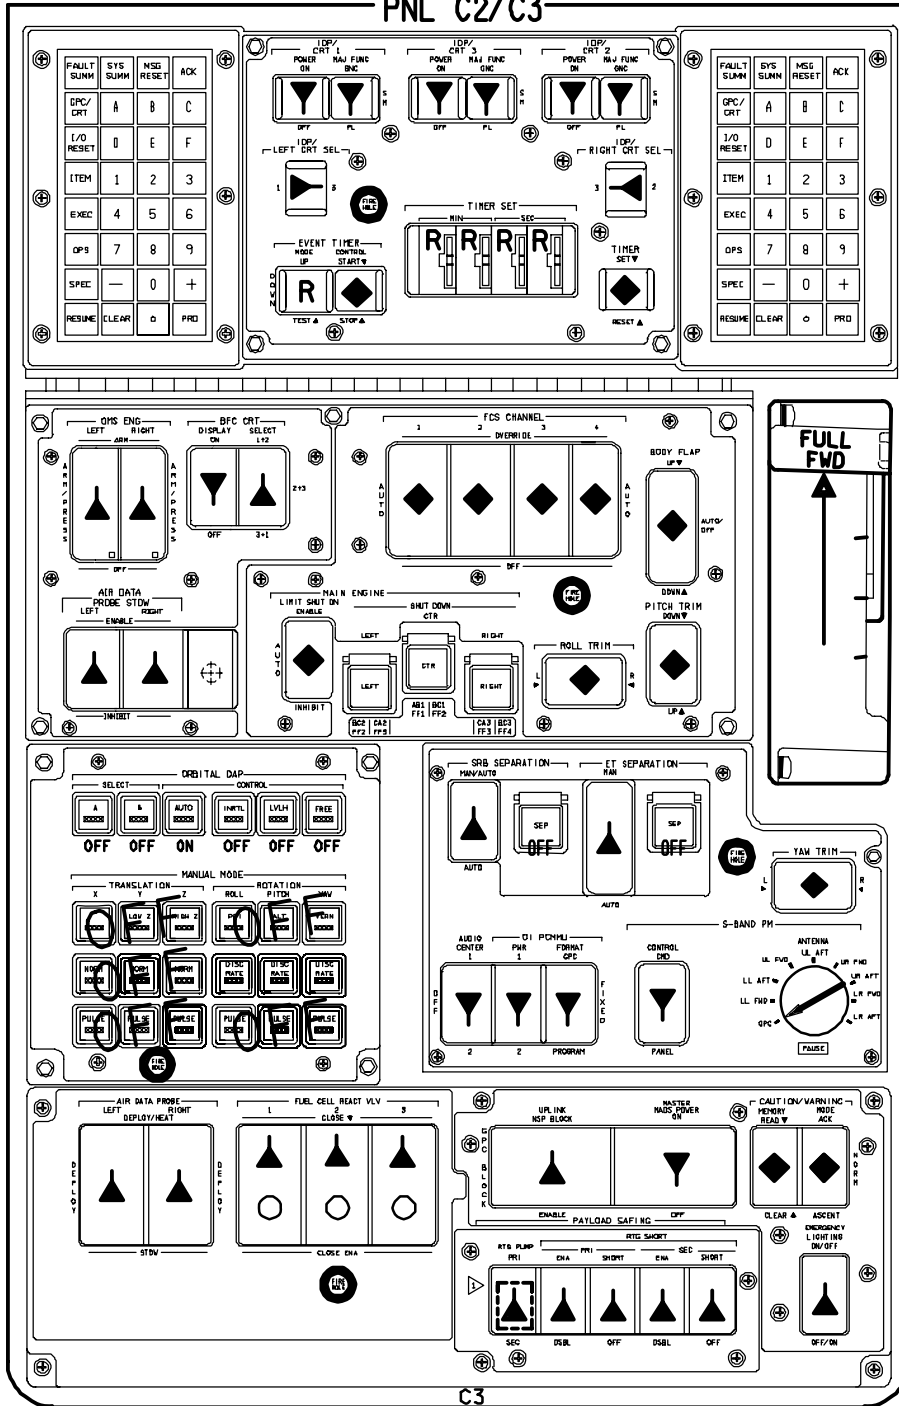


OV103

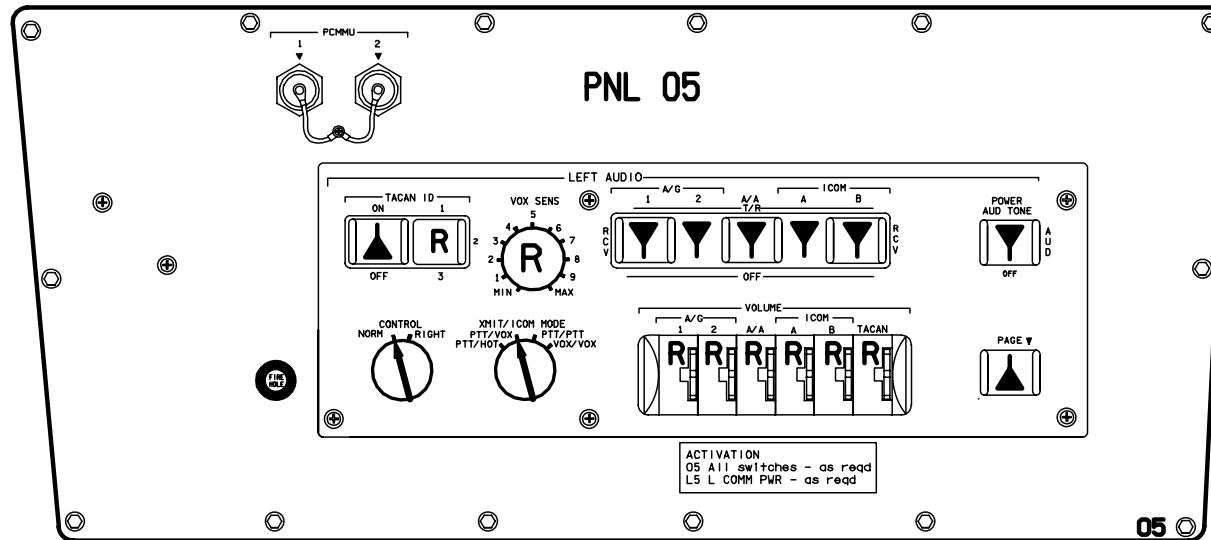
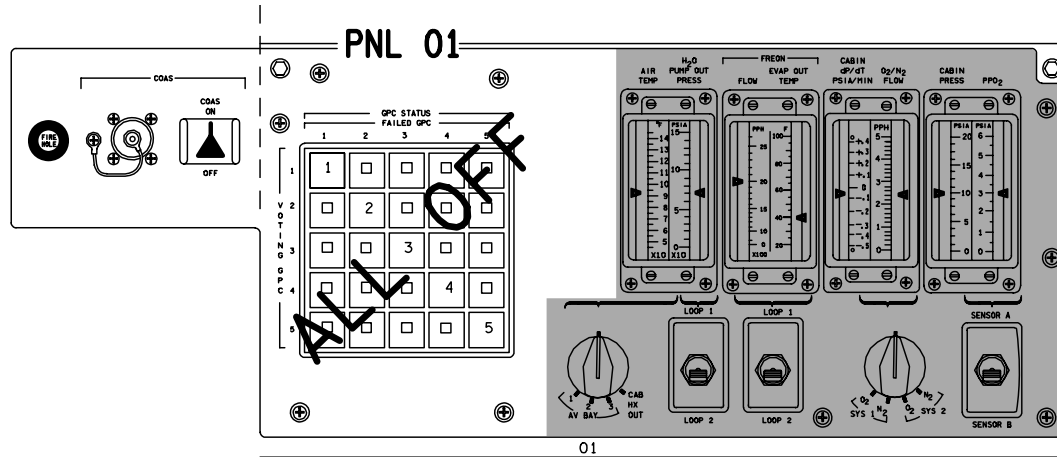


OV103




PNL 06


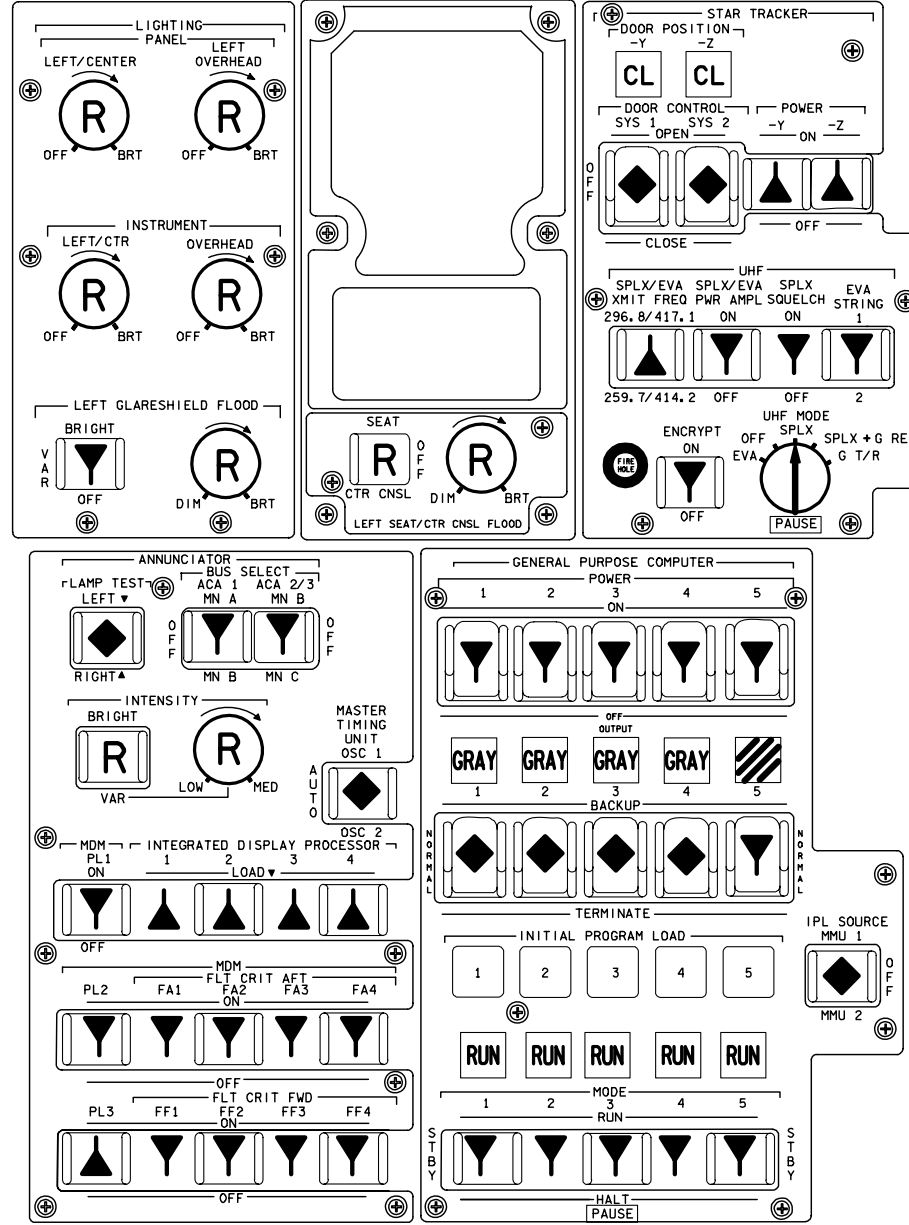




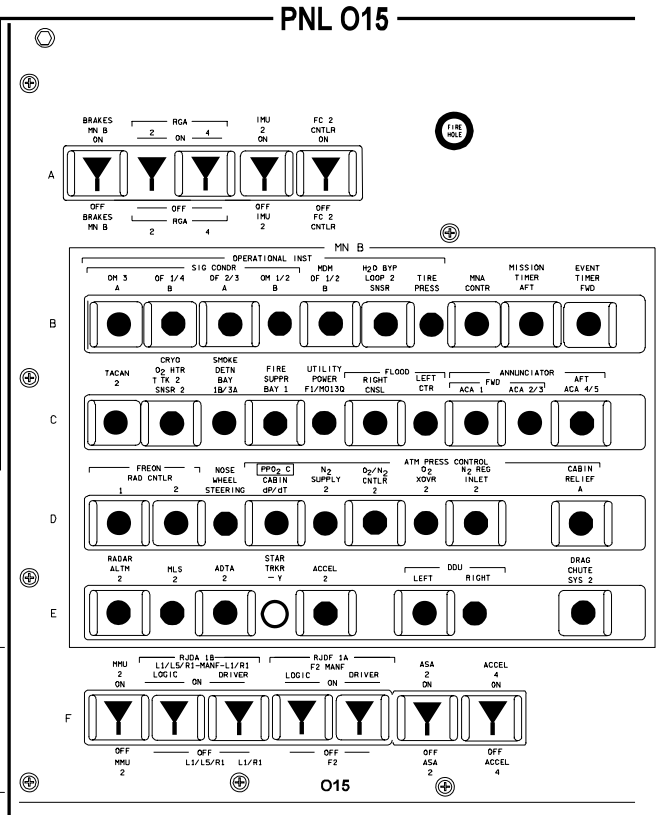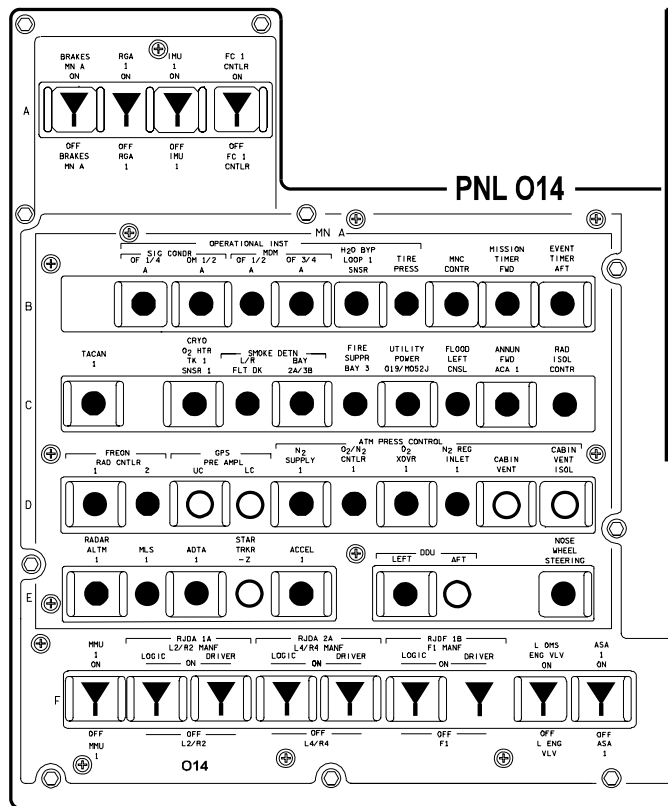


# OV103

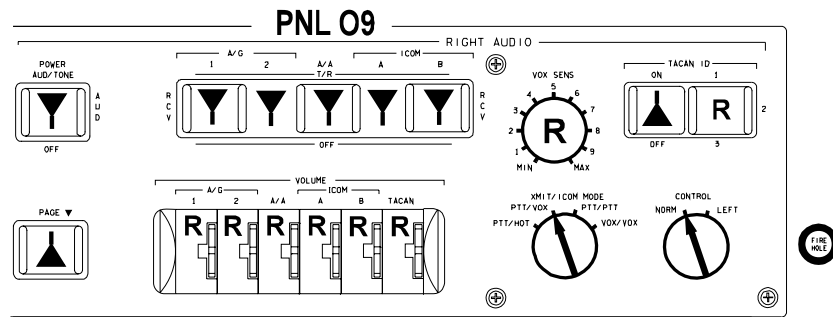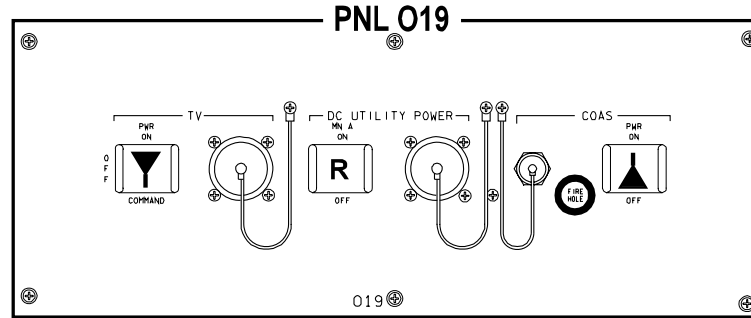
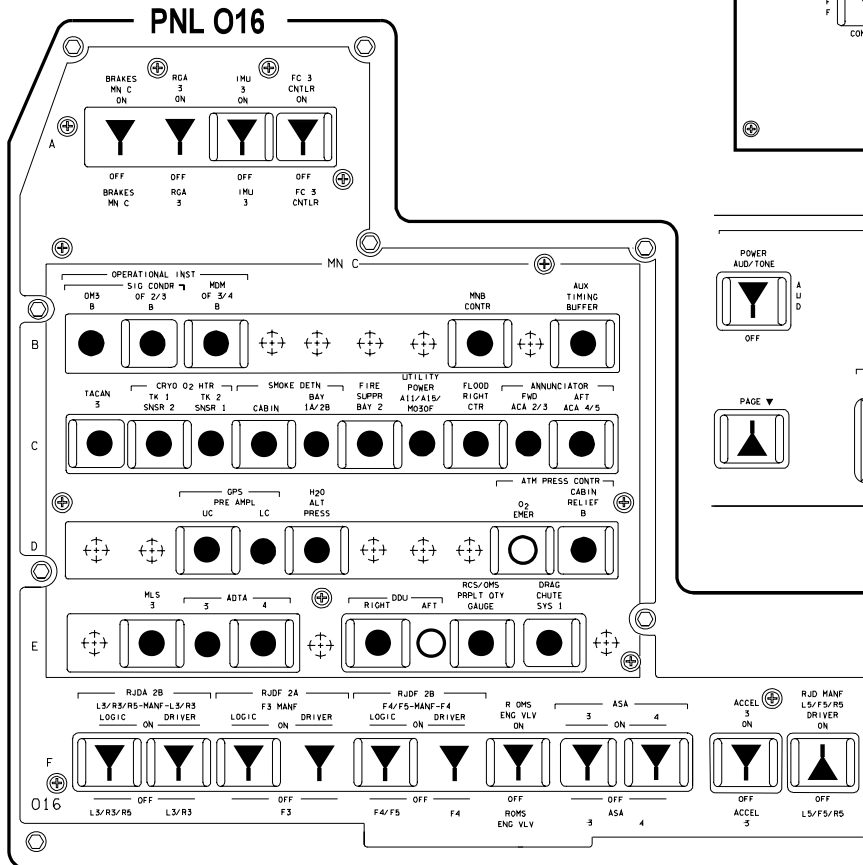


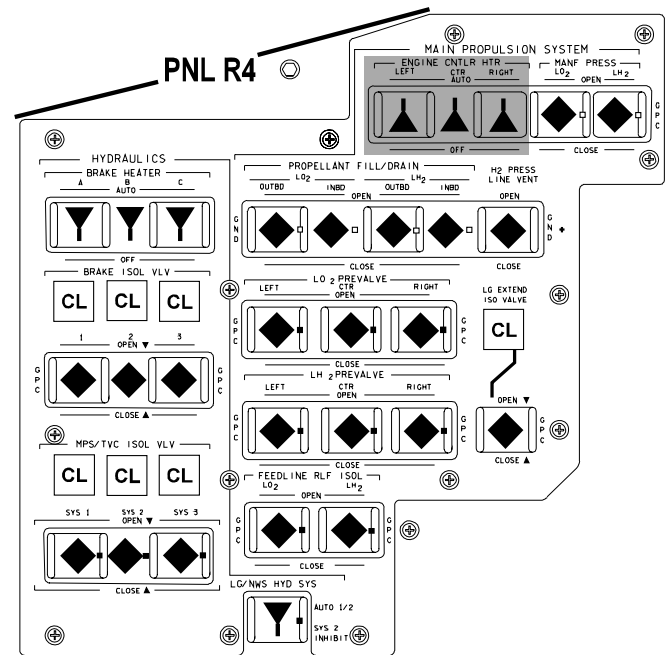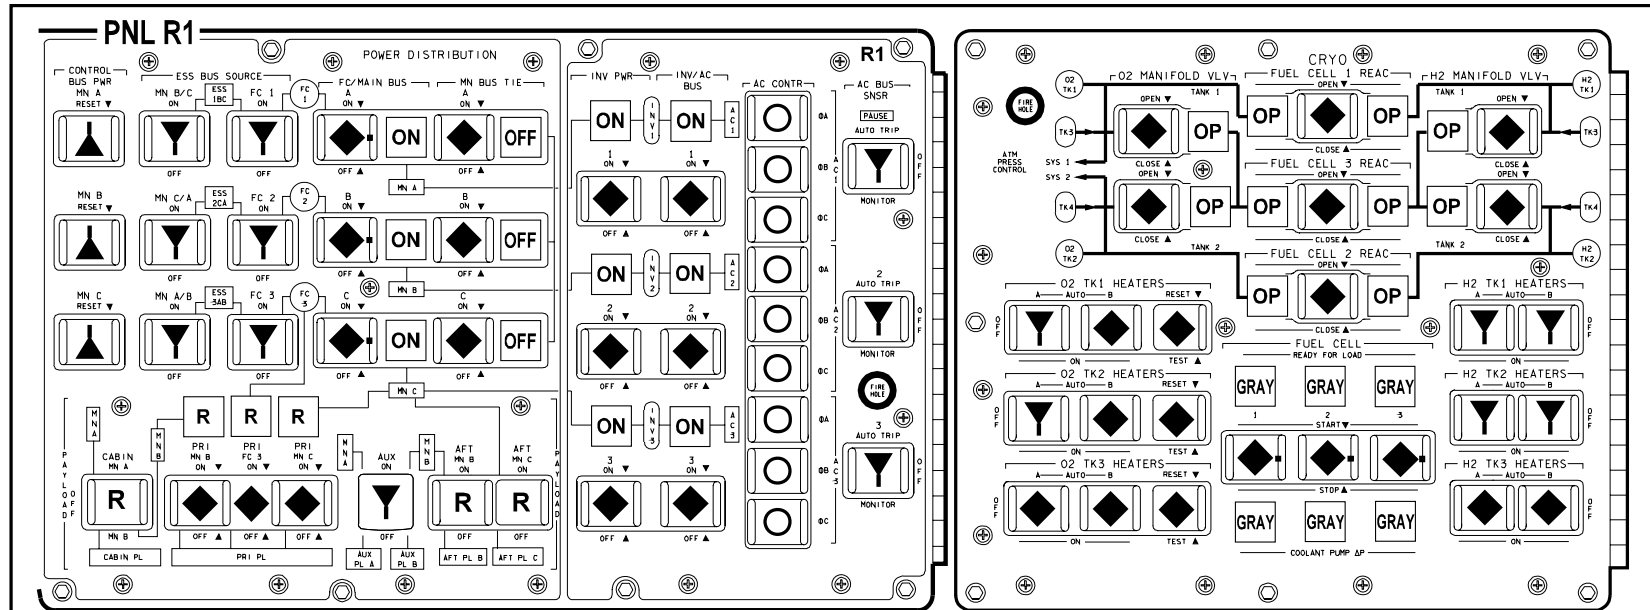



OV103

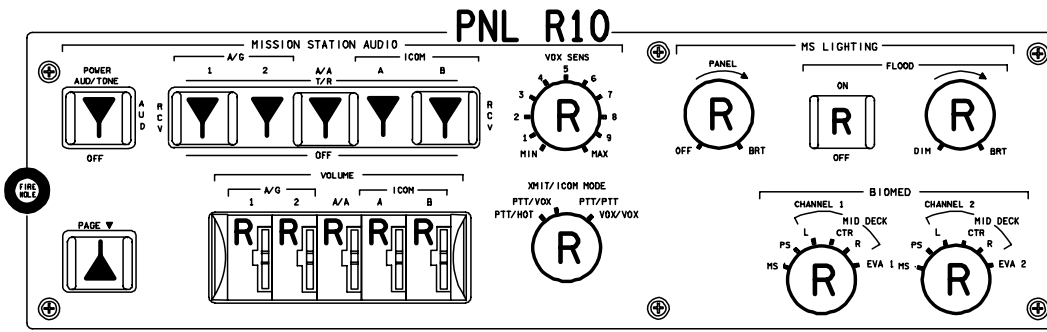


ACTIVATION  
 R10 MS AUD PWR - AUD/TONE  
                   All other sws - as reqd  
 R12 MS AUD CONTL - NORM  
 A11 MS COMM CCU PWR - ON

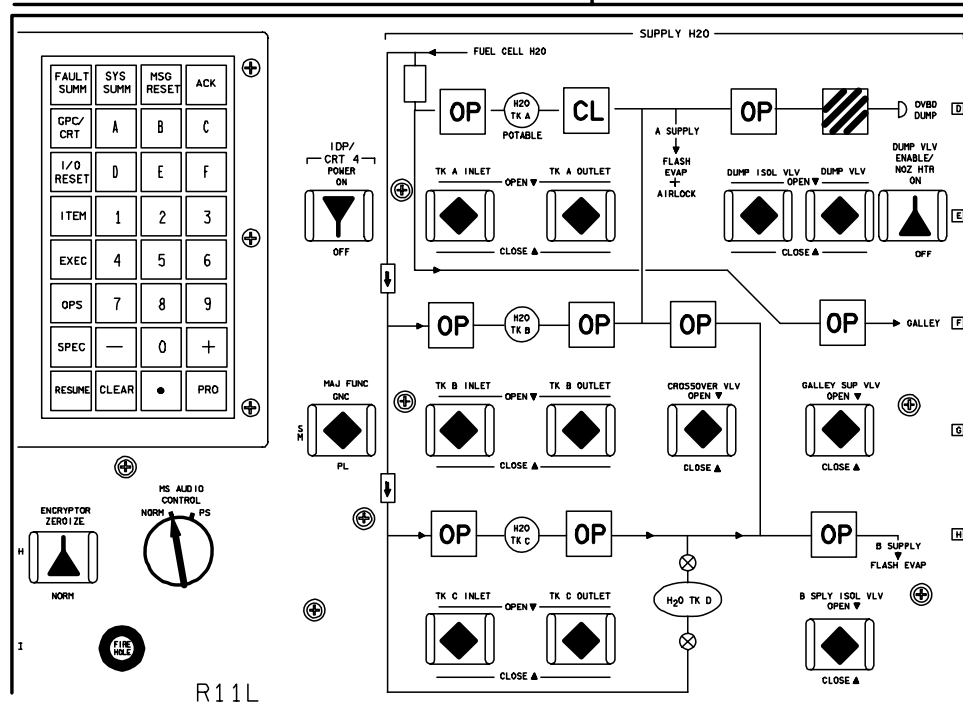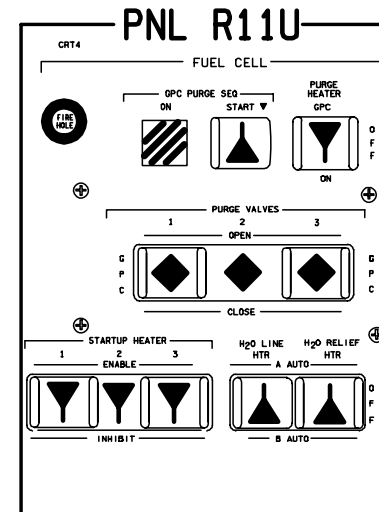

OV103

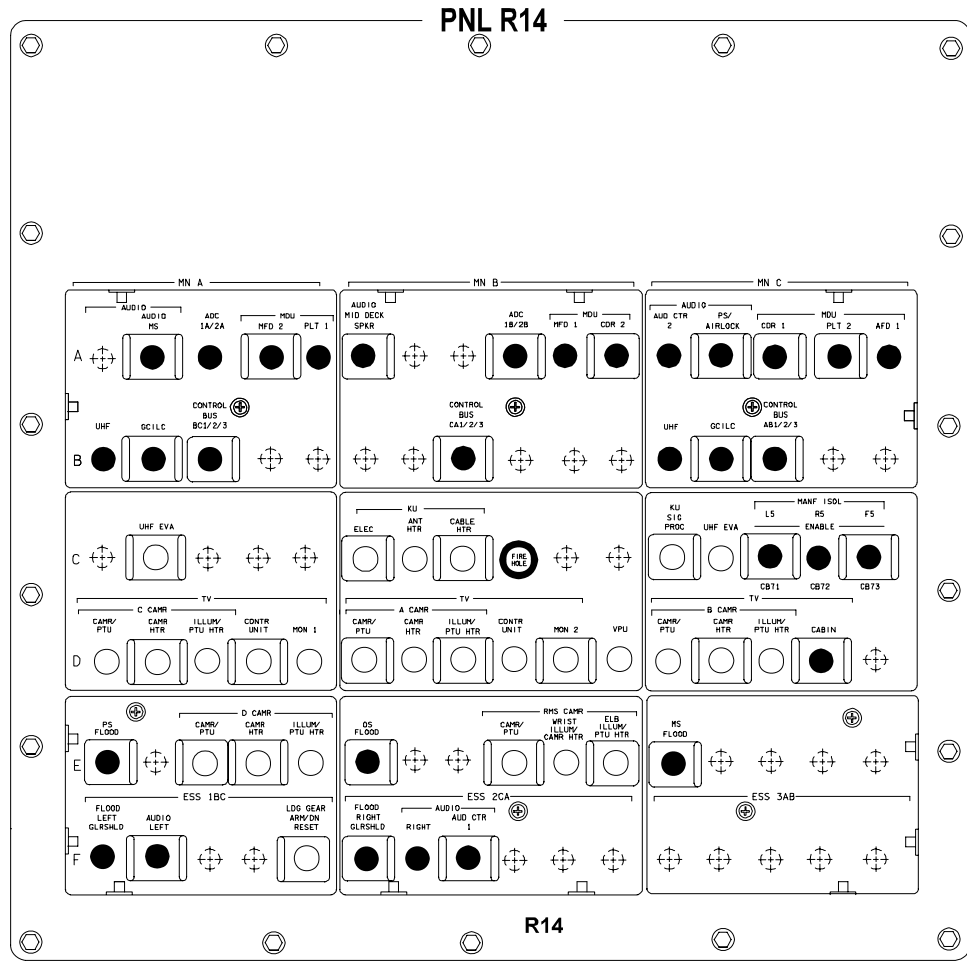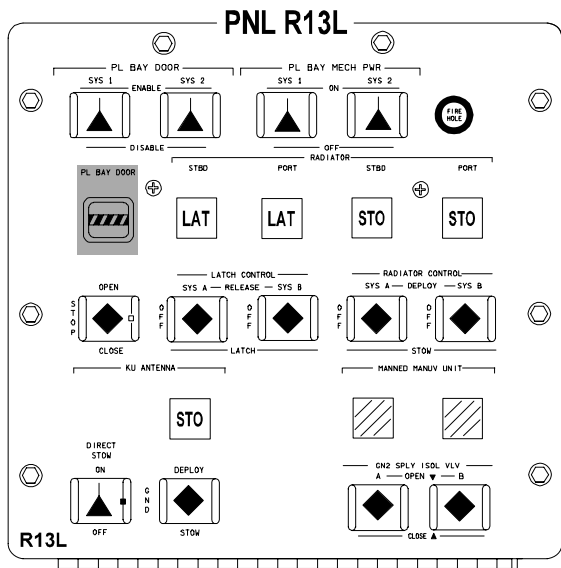

OV103



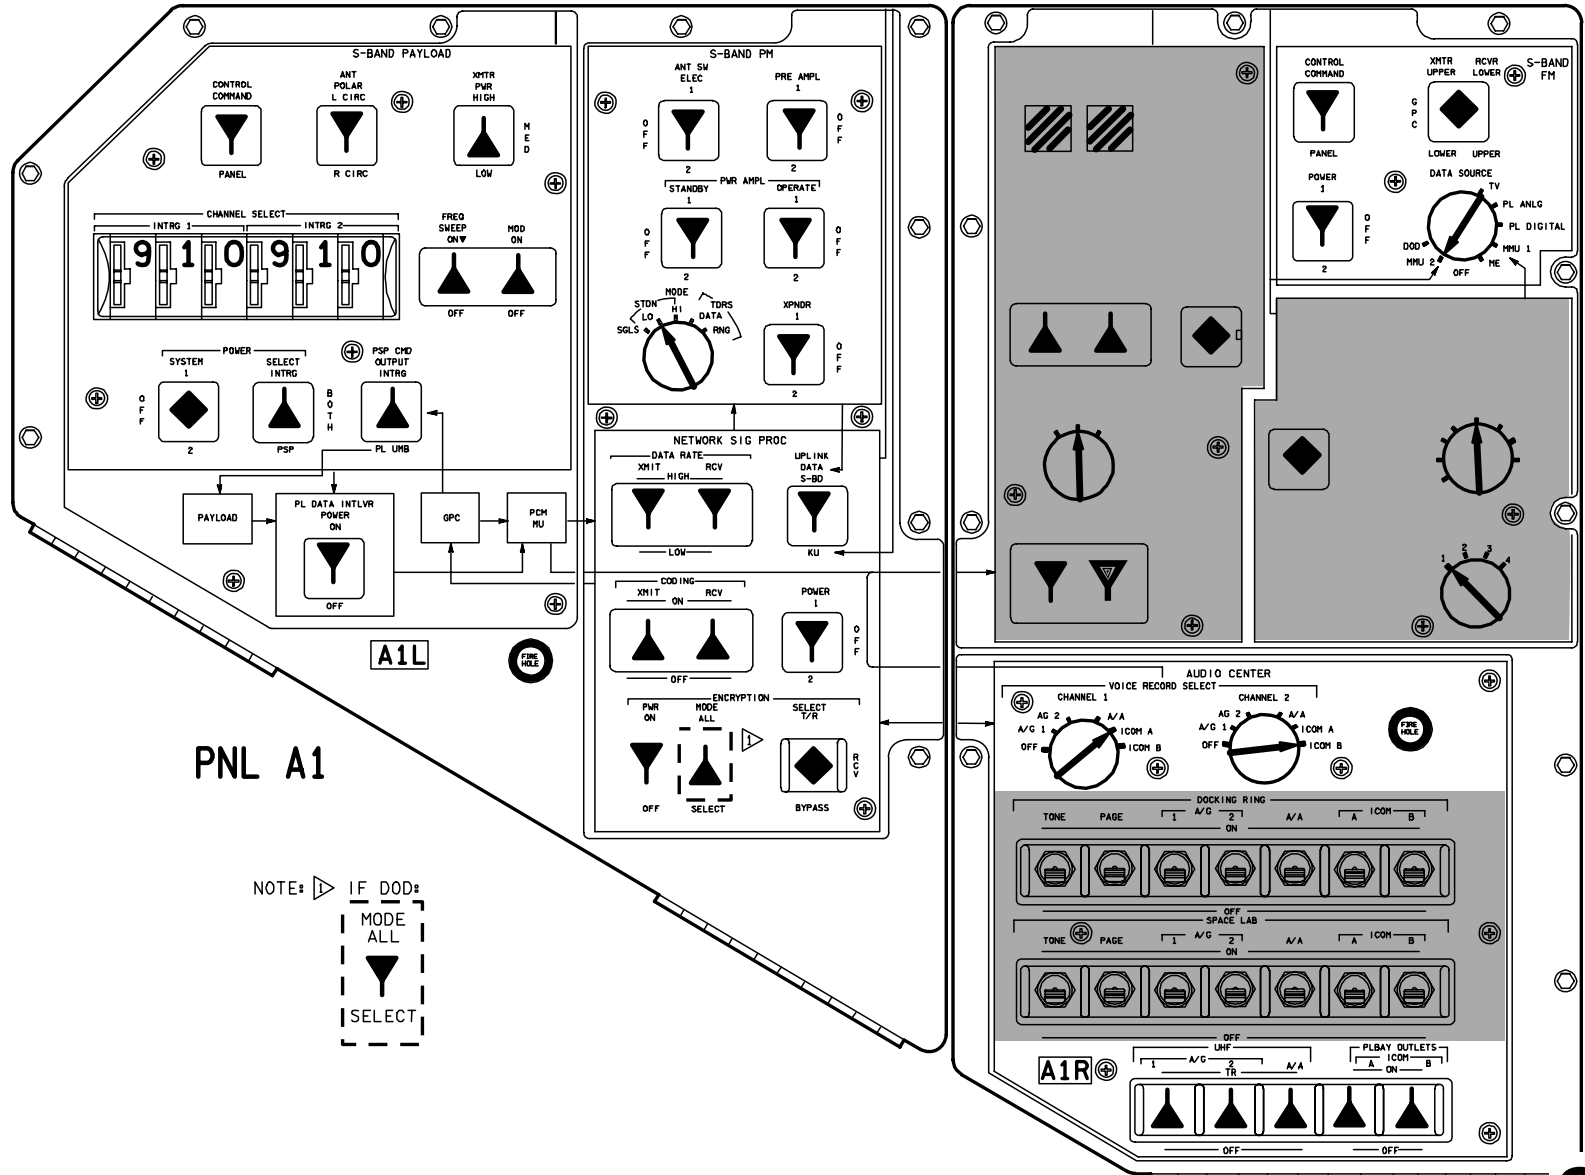


PNL A1

A1L


A1R

OV103

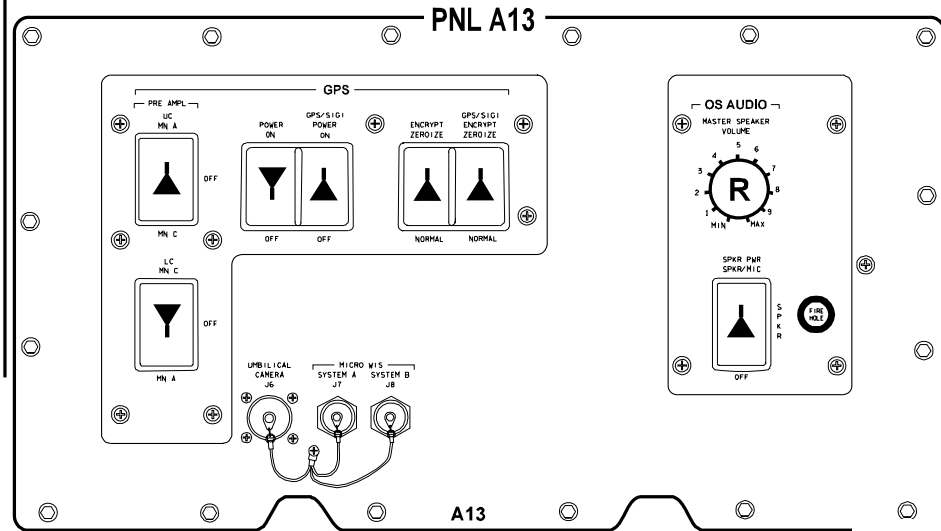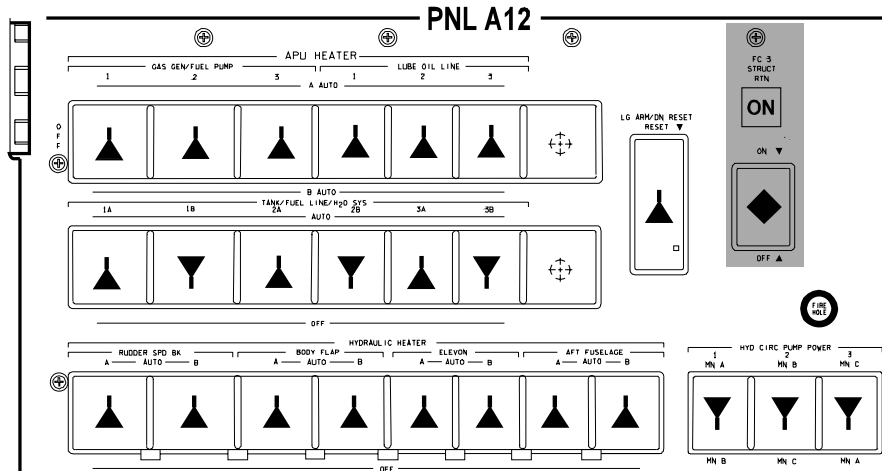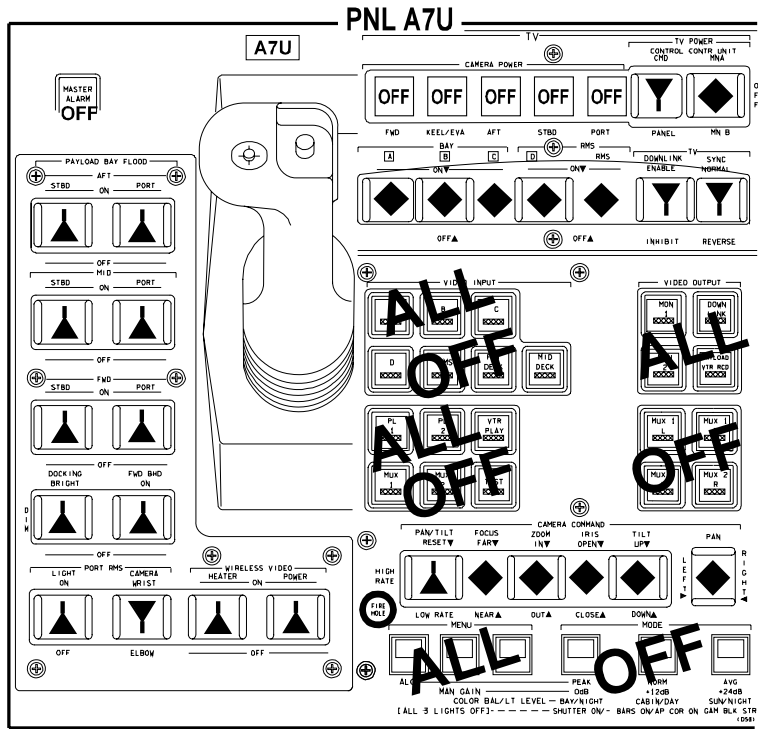

OV103

PNL L9

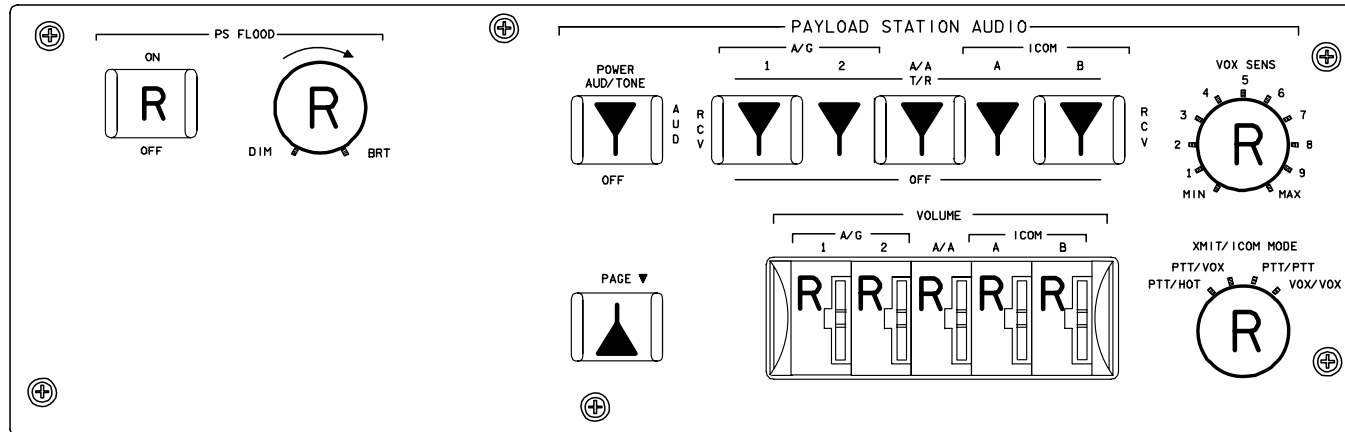



ACTIVATION  
L9 All switches - as reqd  
A15 PS COMM CCU PWR - ON

L9



OV103

PNL A6L

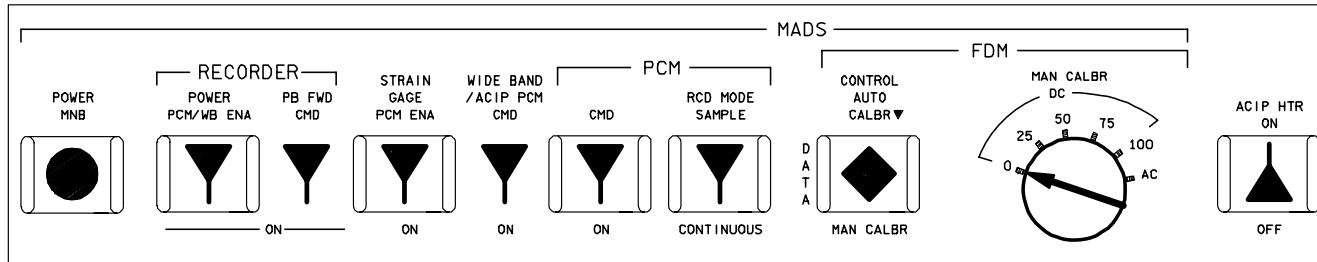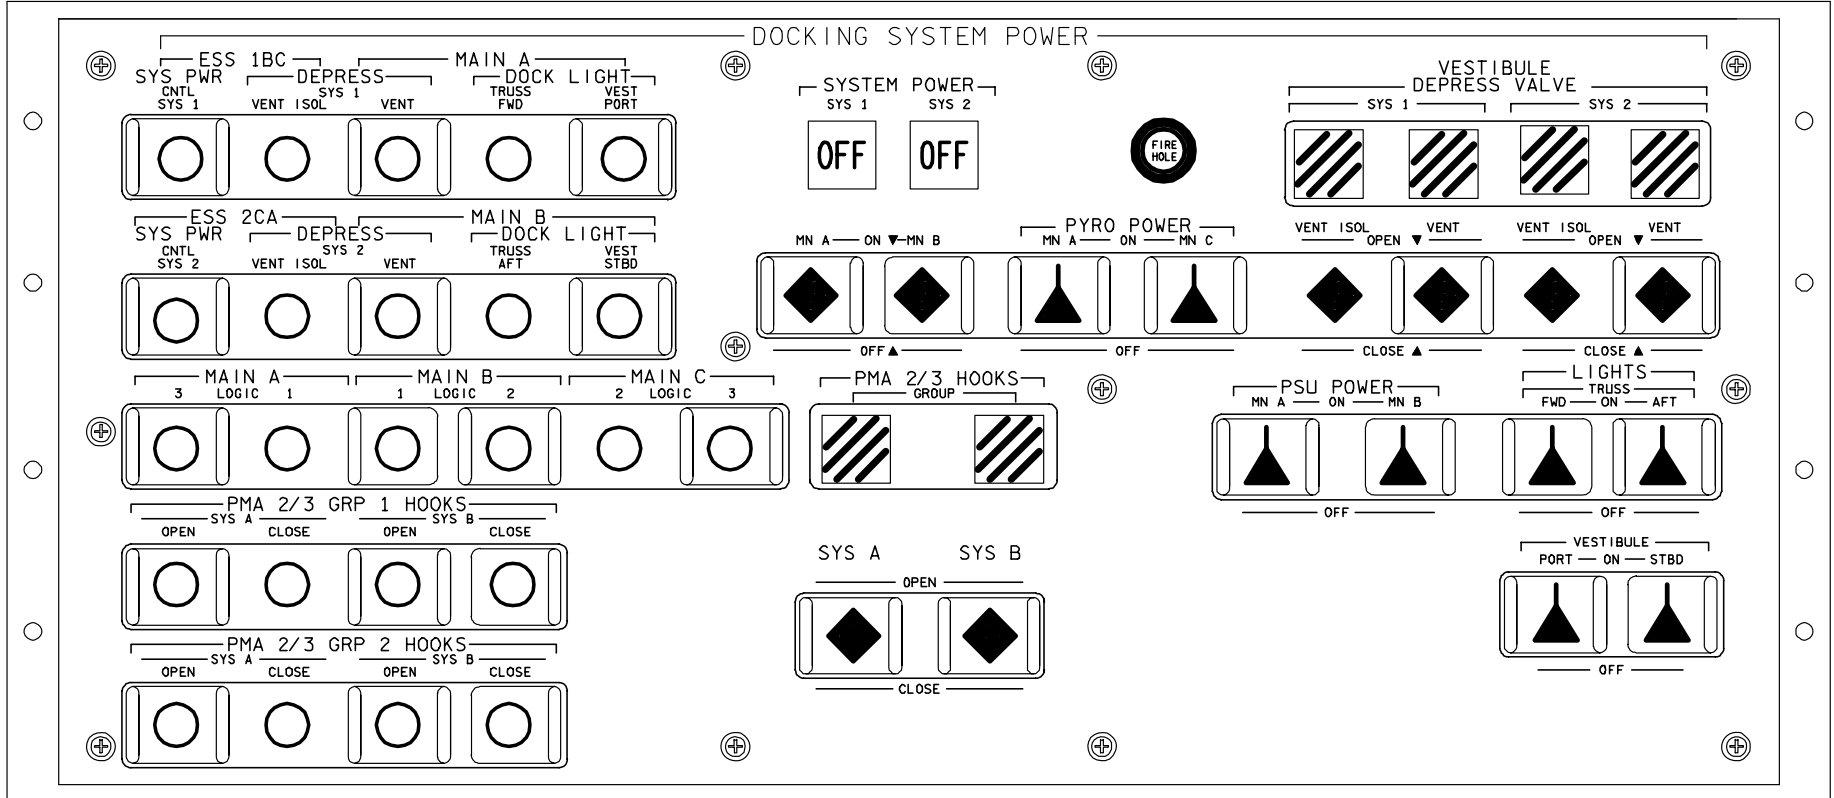

48015E327\_114. PNL 1

OV103/DATE 04/28/05

**OV103**

OV103

**CONTROL PANEL POWER**

A ON OFF      B ON OFF      C ON OFF

**HEATERS/DCU POWER**

H1 ON OFF      H2/DCU ON OFF      H3/DCU ON OFF

**APDS POWER**

A<sub>DS</sub> ON OFF      B<sub>DS</sub> ON OFF      C<sub>DS</sub> ON OFF

**STATUS**

POWER	ON	INITIAL	CONTACT
APDS PROTECT	CIRCUIT OFF	CAPTURE	CAPTURE
RING	ALIGNED	RING	FORWARD POSITION
RING	INITIAL POSITION	TO HOOK	
FIXERS	OFF	INTER	SEALED
HOOKS 1	OPEN	HOOKS 1	CLOSED
HOOKS 2	OPEN	HOOKS 2	CLOSED
LATCHES	CLOSED	LATCHES	OPEN
UNDOCK	COMPLET	RING	FINAL POSITION

**PYROS**

A<sub>p</sub> ON OFF      B<sub>p</sub> ON OFF      C<sub>p</sub> ON OFF

A<sub>p</sub>      C<sub>p</sub>

**FIRE HOLE**

**OFF**

**OFF**

**PYRO COMMANDS**

PYRO CIRC PROT OFF      PYRO CIRC PROT ON

ACT HOOKS FIRING      PAS HOOKS FIRING

**APDS CONTROL COMMANDS**

OPEN HOOKS      OPEN LATCHES

UNDOCKING

A<sub>DS</sub>      B<sub>DS</sub>      C<sub>DS</sub>

**OFF**

LAMP TEST


PNL A7L

**APDS CONTROL COMMANDS**

POWER ON	POWER OFF	RING OUT	RING IN
APDS CIRC PROT OFF	CLOSE HOOKS	CLOSE LATCHES	FIXER OFF

APDS CONTROL PANEL

OV103

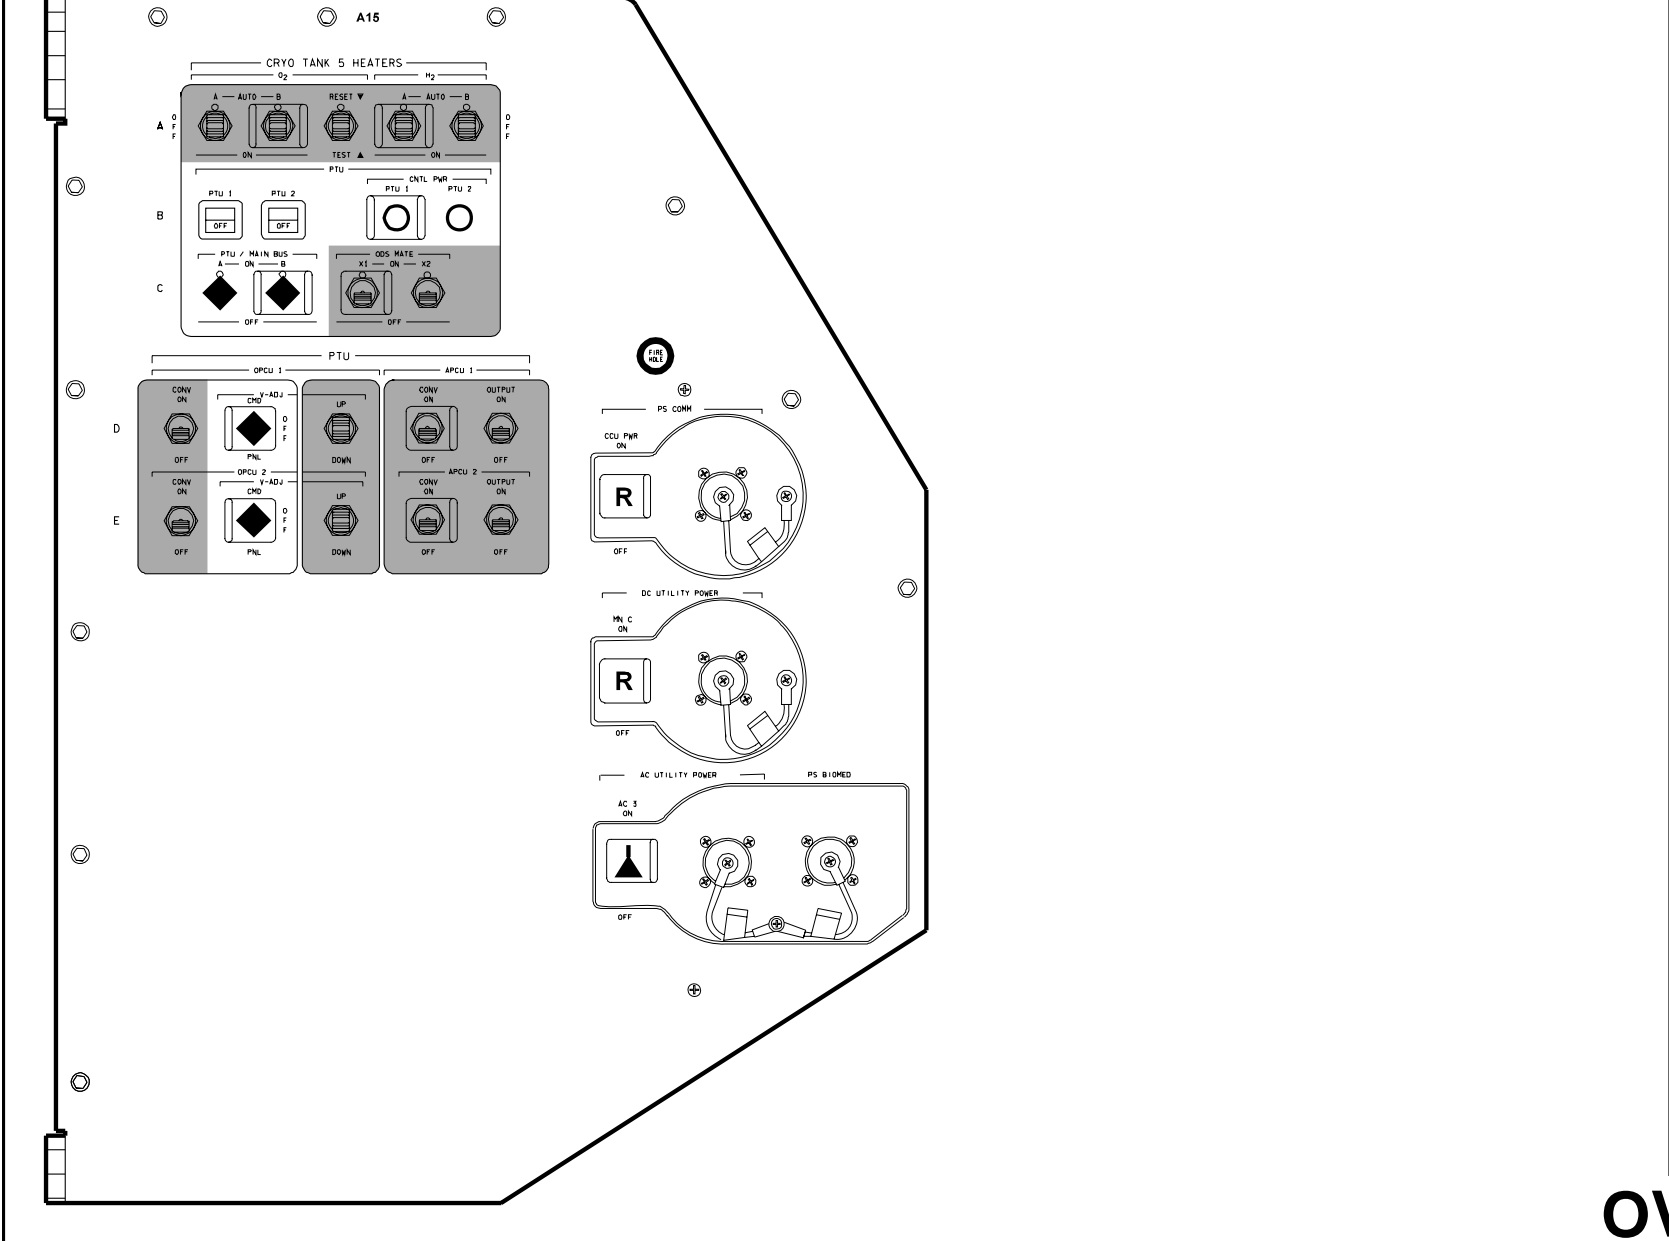

48015E329\_120, PNL 1




OV103/DATE 09/10/07


(OV103) A3-29



OV103

D/O/3/GEN Q

# OV103

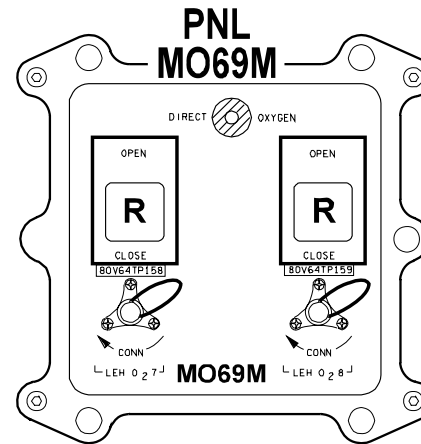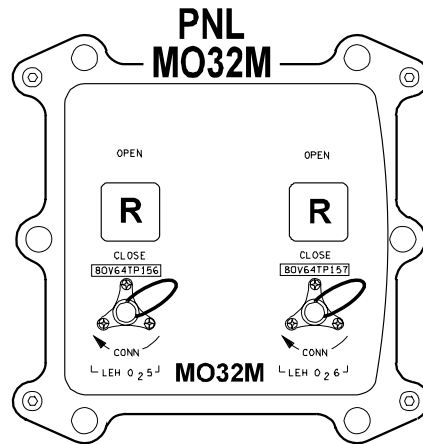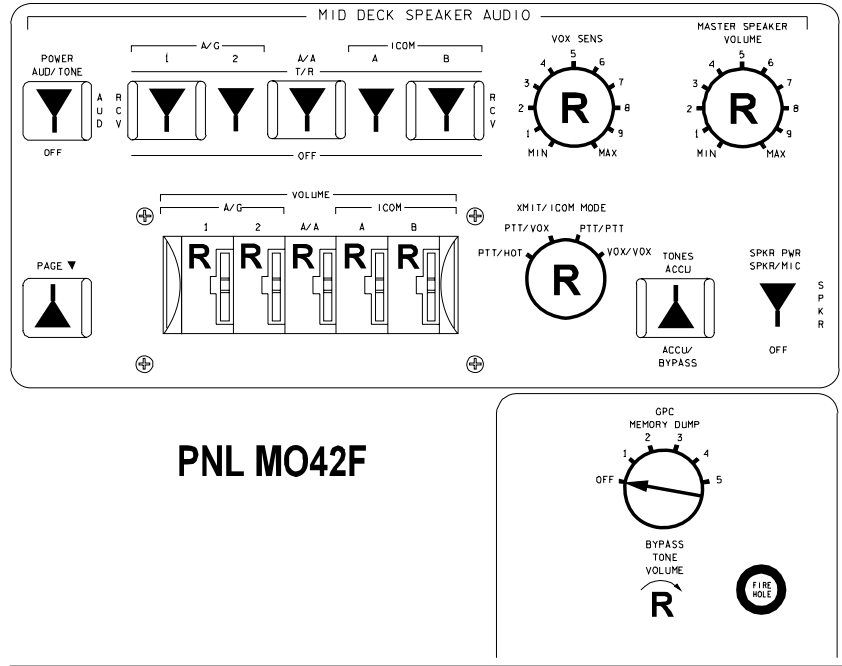


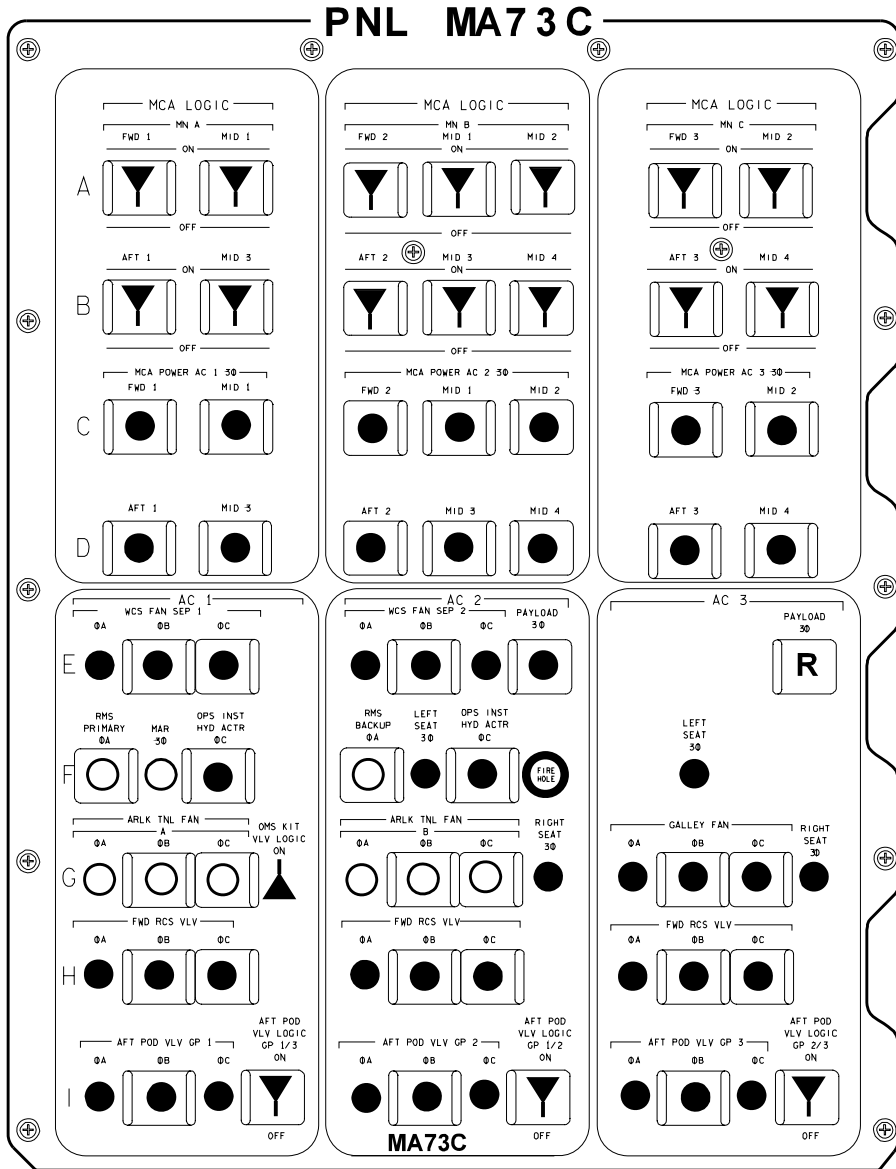


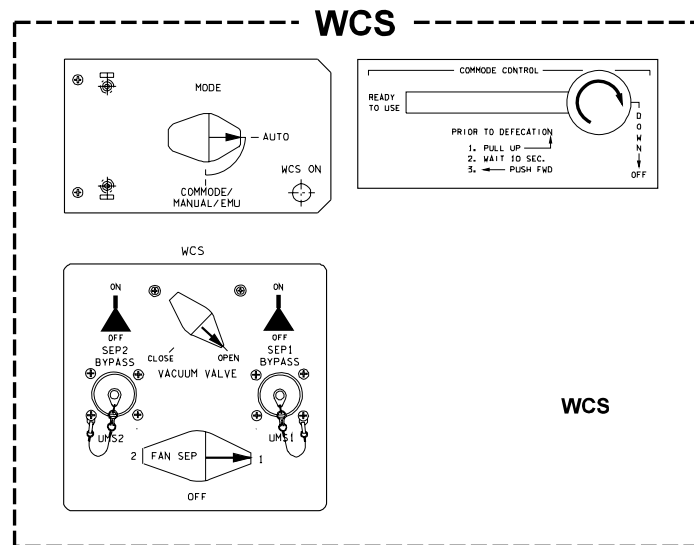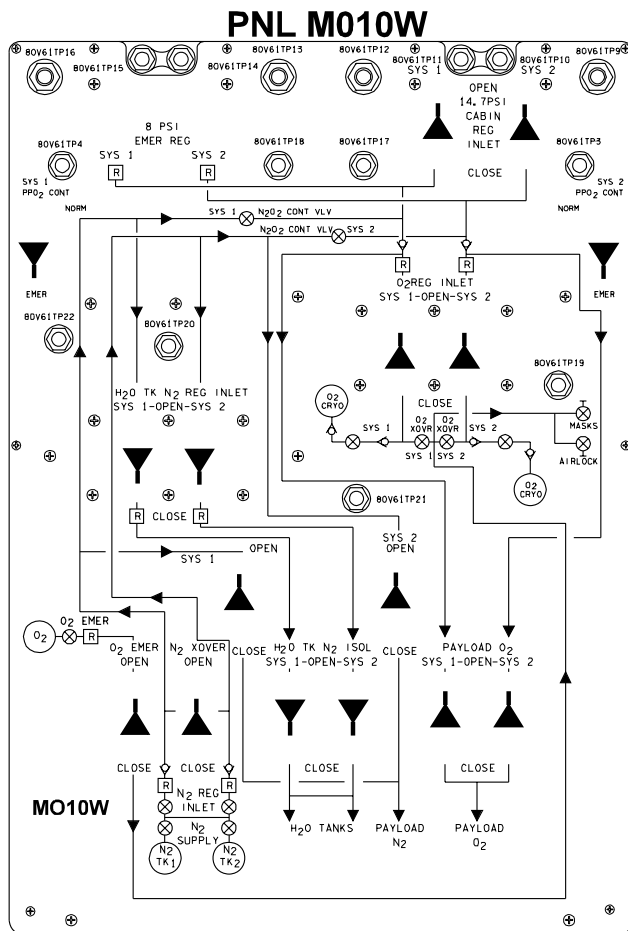



LIGHTING  
FL DDD

1 ON  
2 ON/OFF

### PNL AW18A





### AW18A

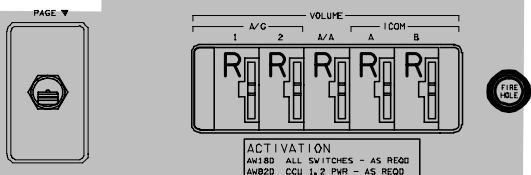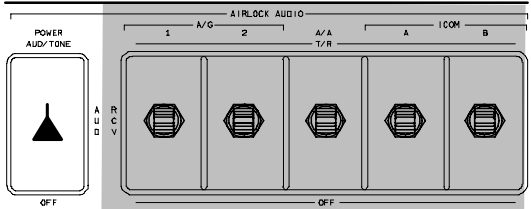

ACTIVATION  
AW18D ALL SWITCHES - AS REQD  
AW82D CCL 1, 2 PWR - AS REQD



### PNL AW18D

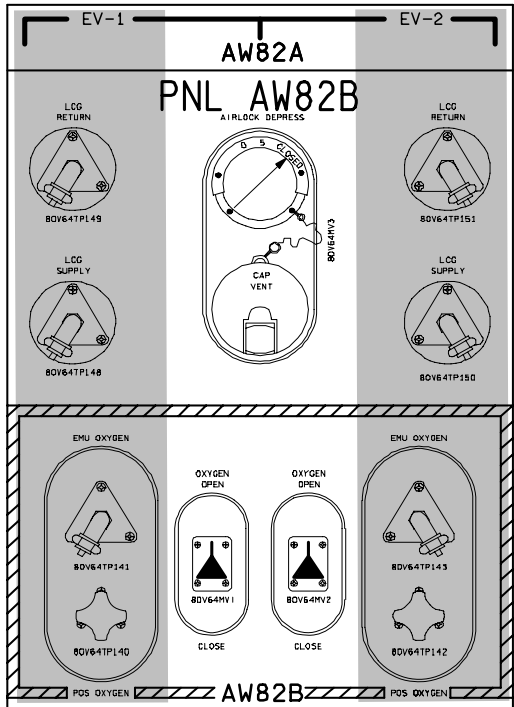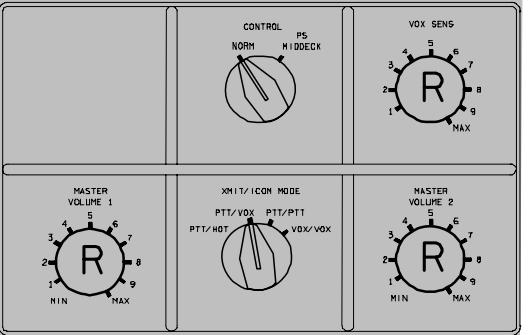

### AW82A PNL AW82B AIRLOCK DEPRESS



### AW82B

### PNL AW18H

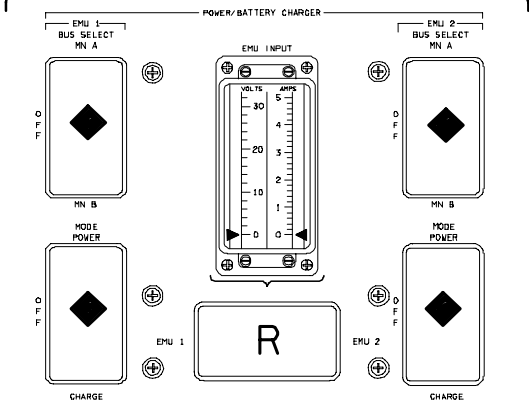


### PNL AW18H

OV104

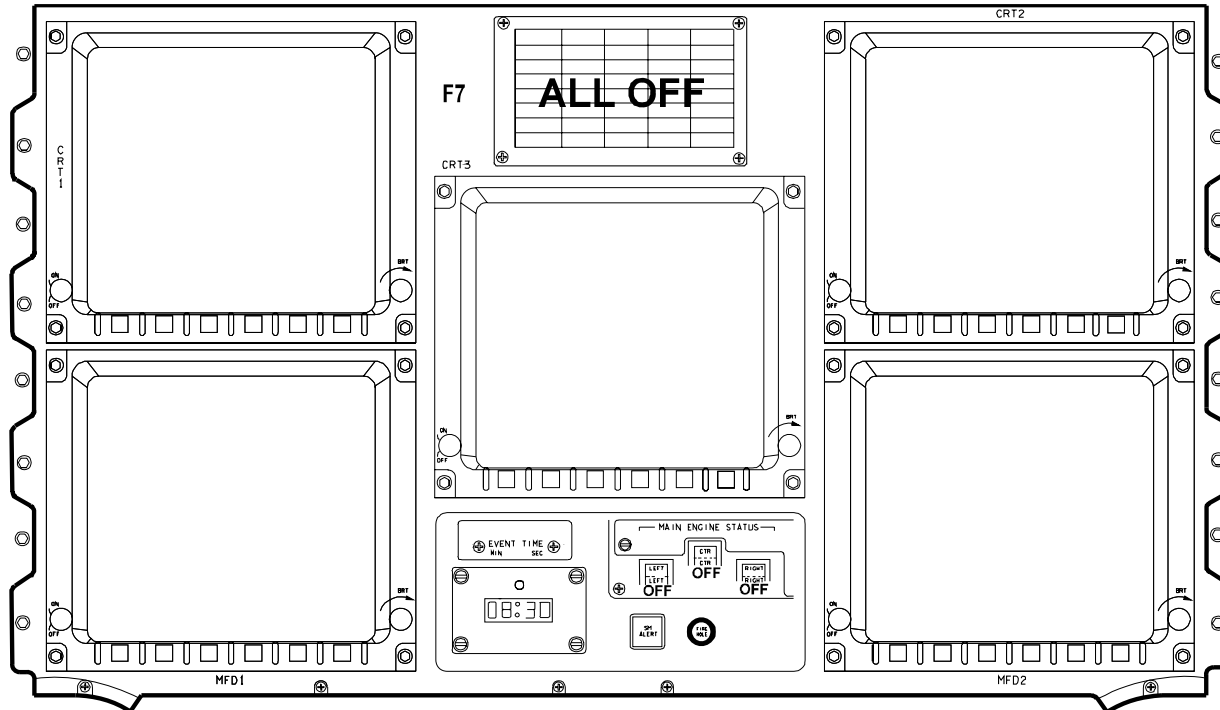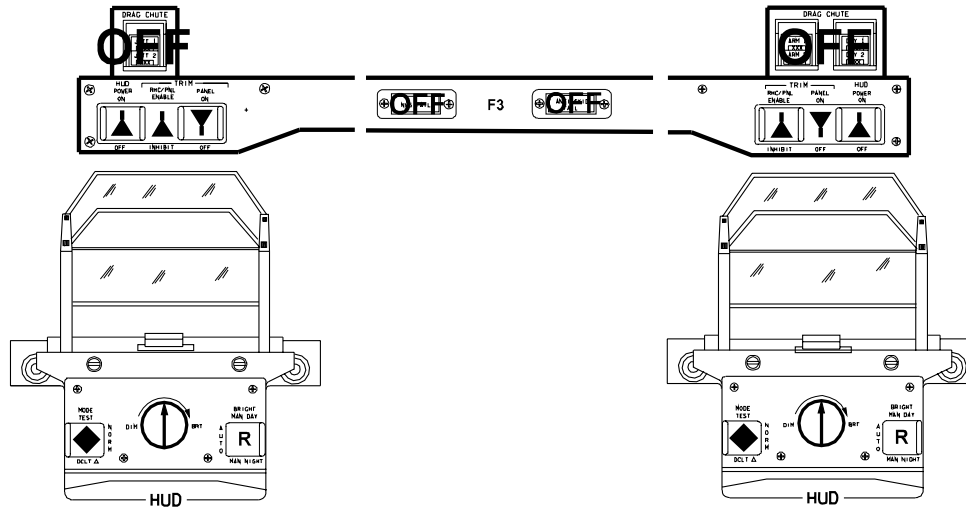




OV104

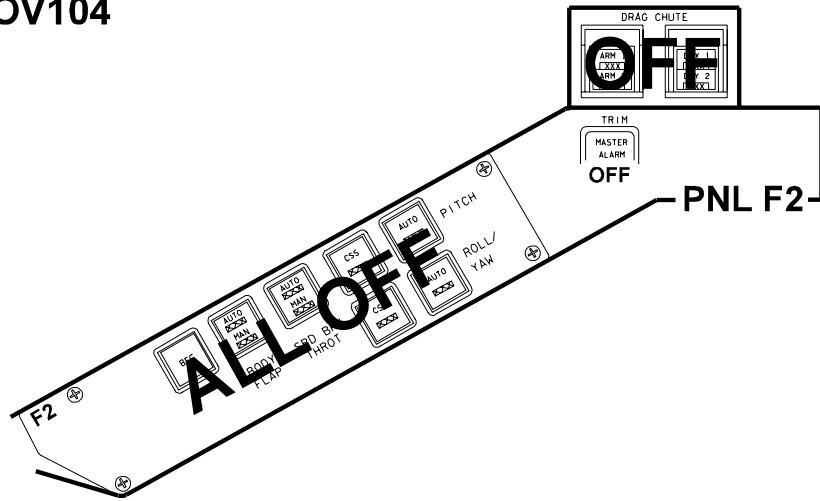


PNL O13

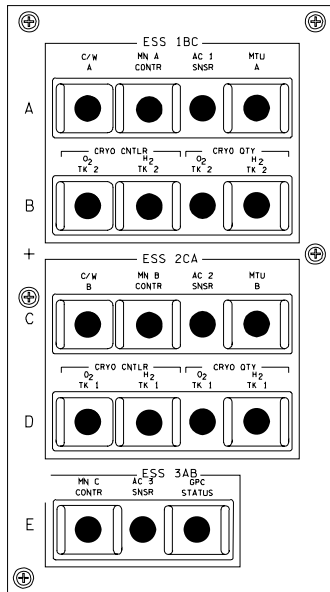


L side OVHD flood - R (MID)

PNL O7

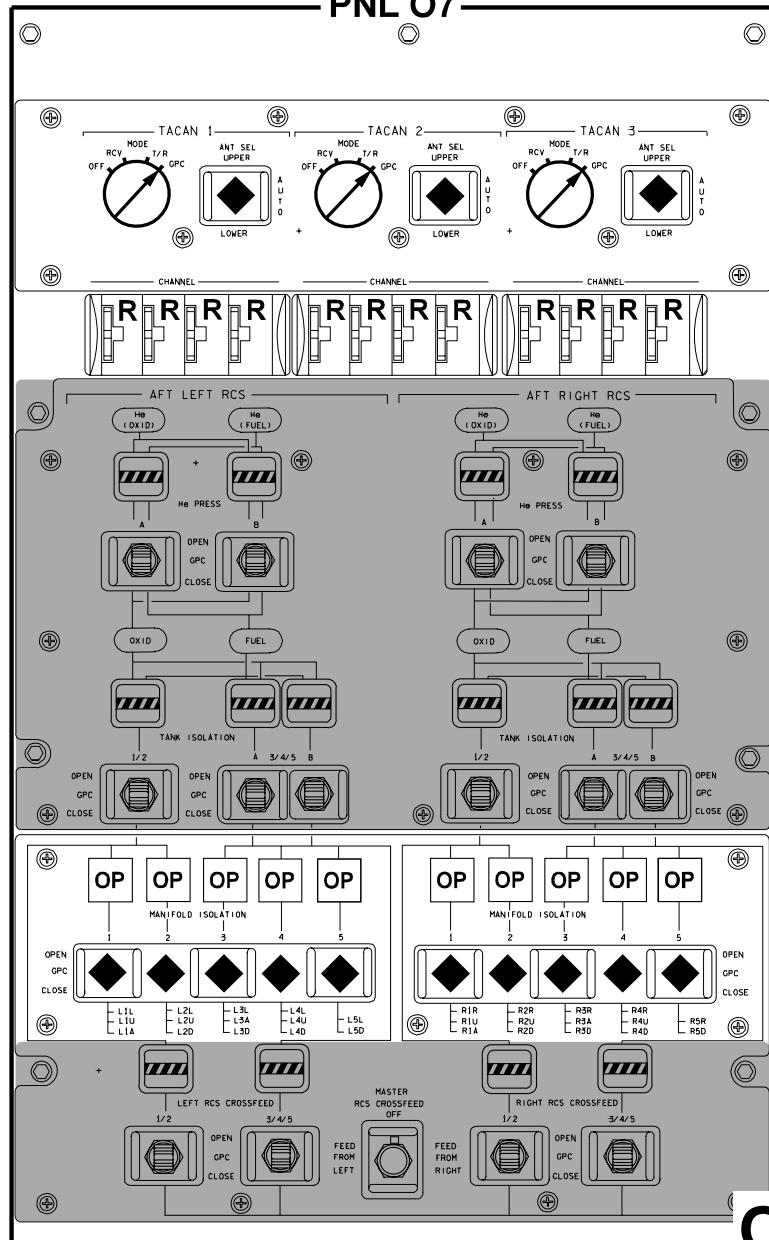

OV104


OV104

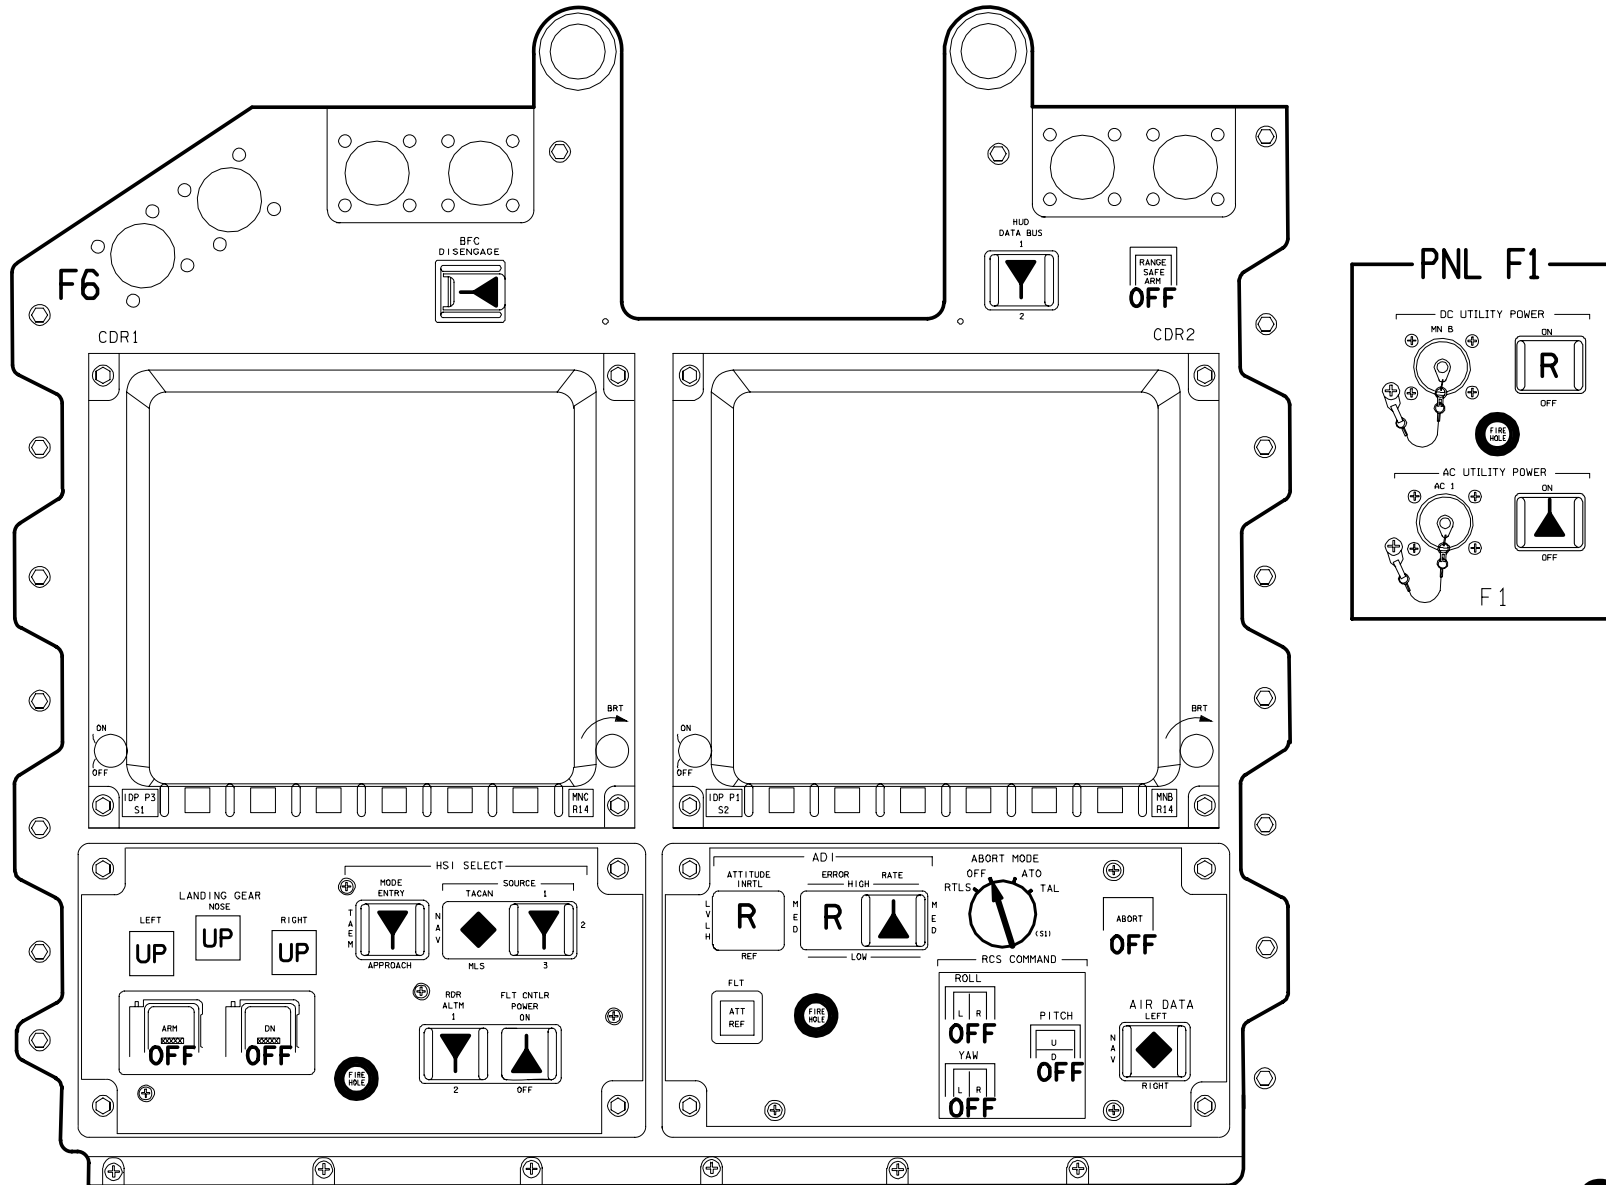


**OV104**

OV104


PNL 08

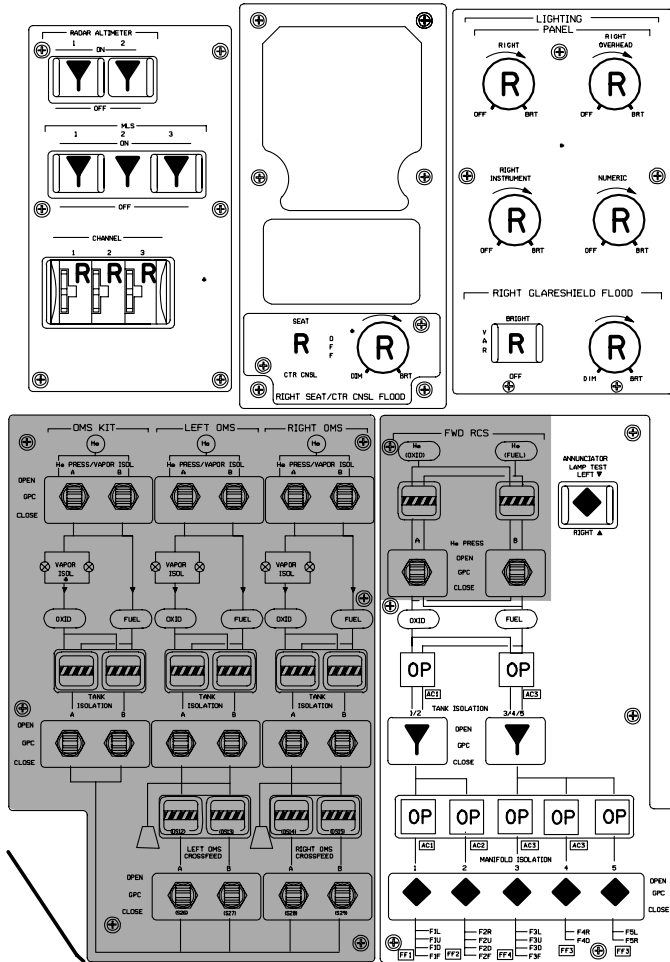


R side OVHD flood - R (MID)

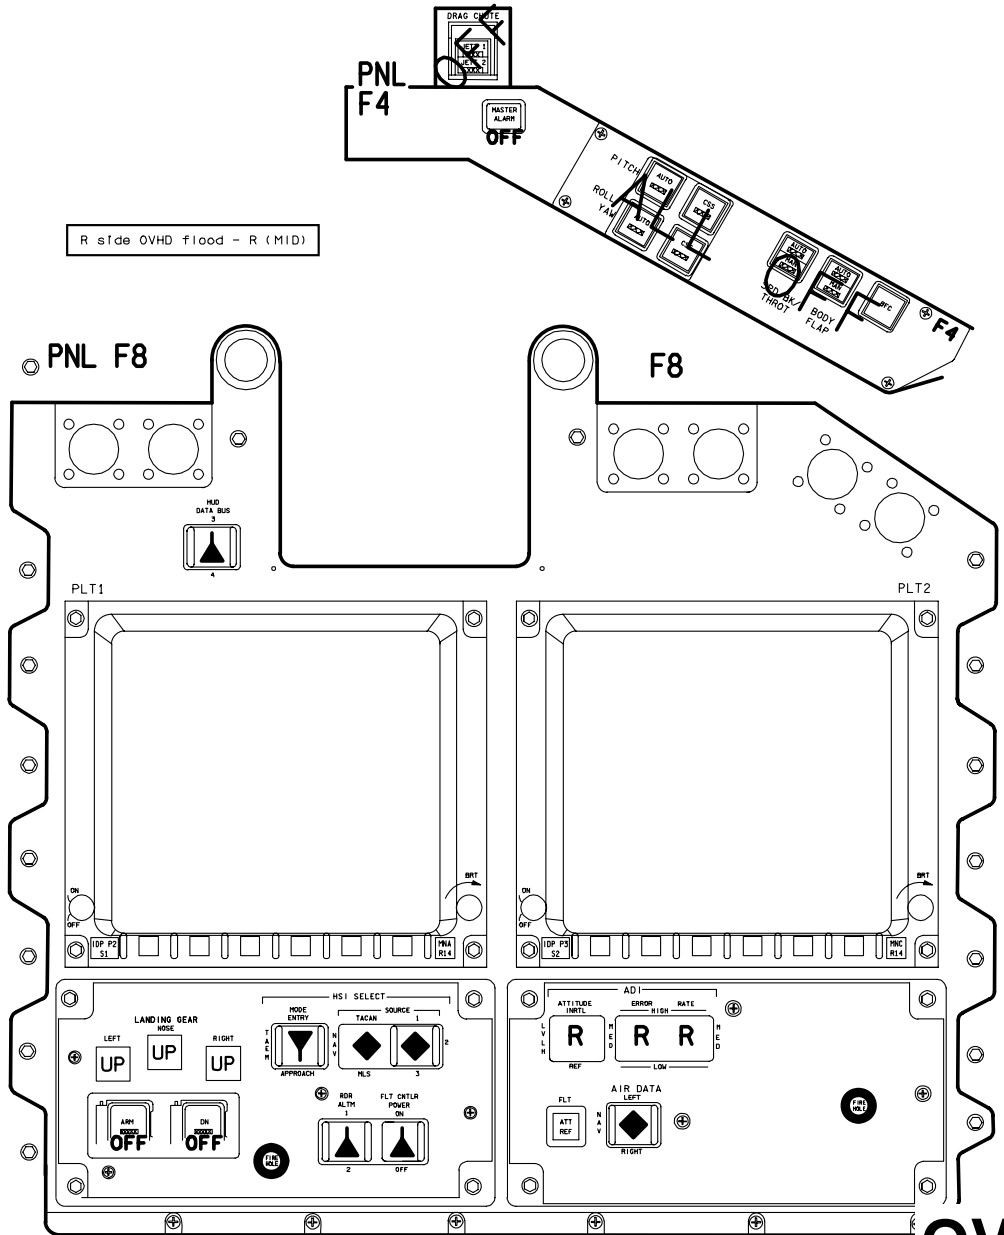

OV104  
PNL R2

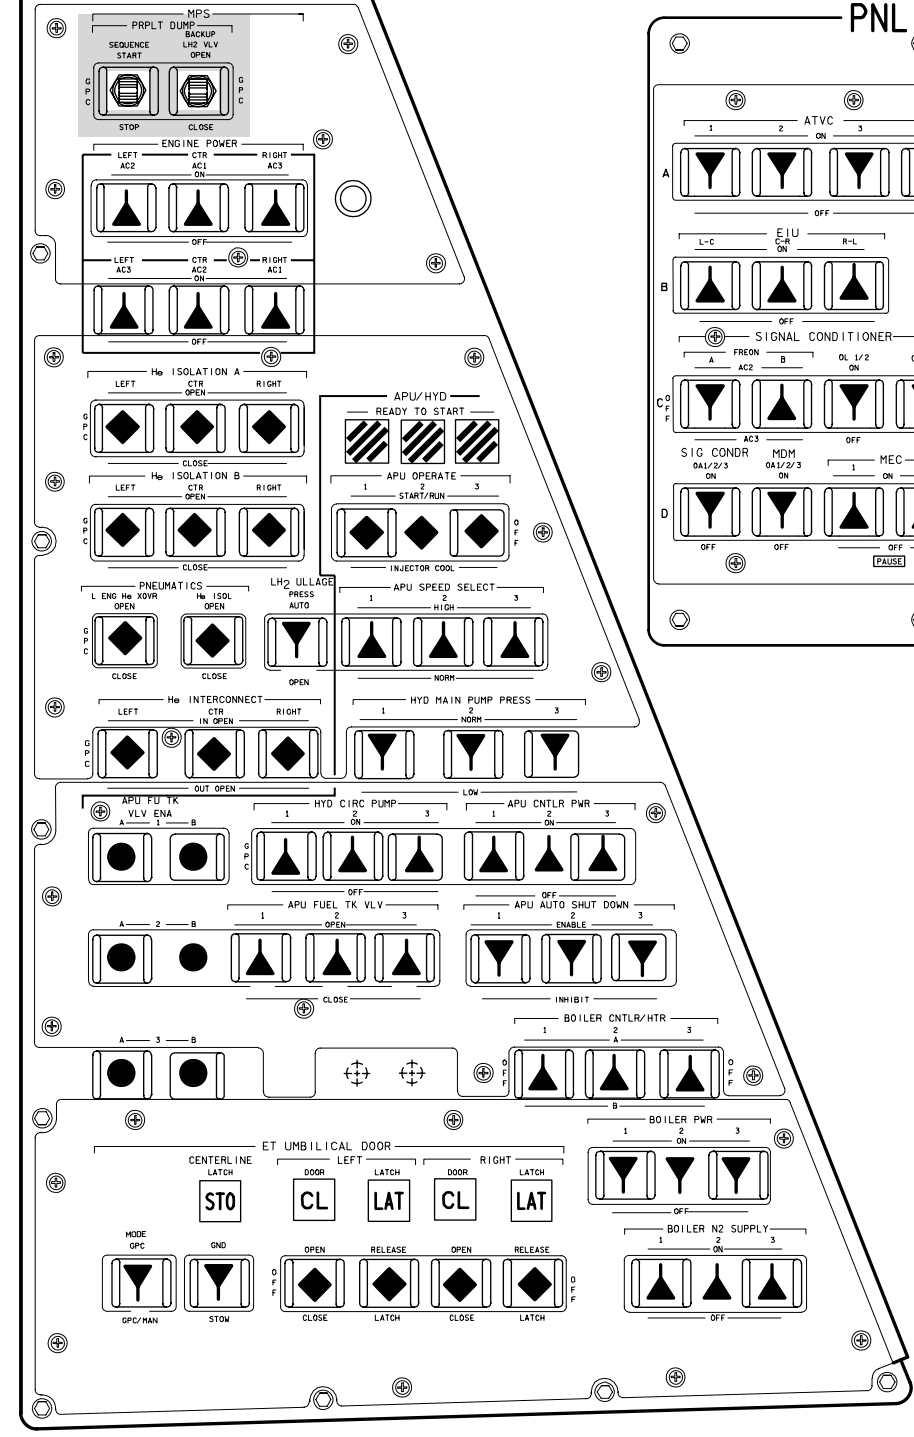

PNL 017

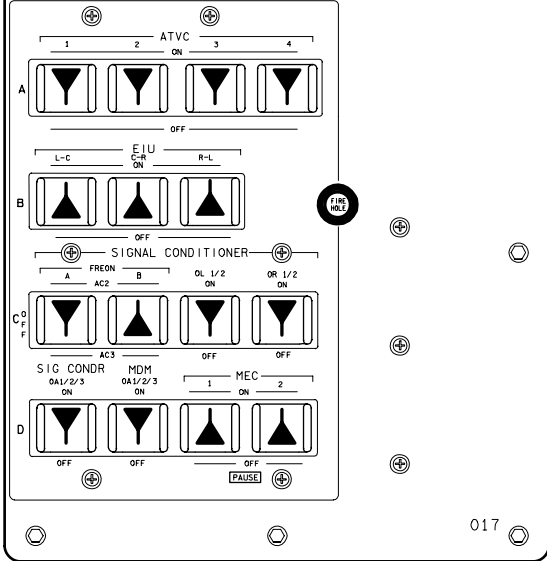




017

ALL VEH/DATE 11/29/04  
48015C308\_114, PNL, 5

**OV104**

(OV104) B3-8


D/O/ALL/GEN Q

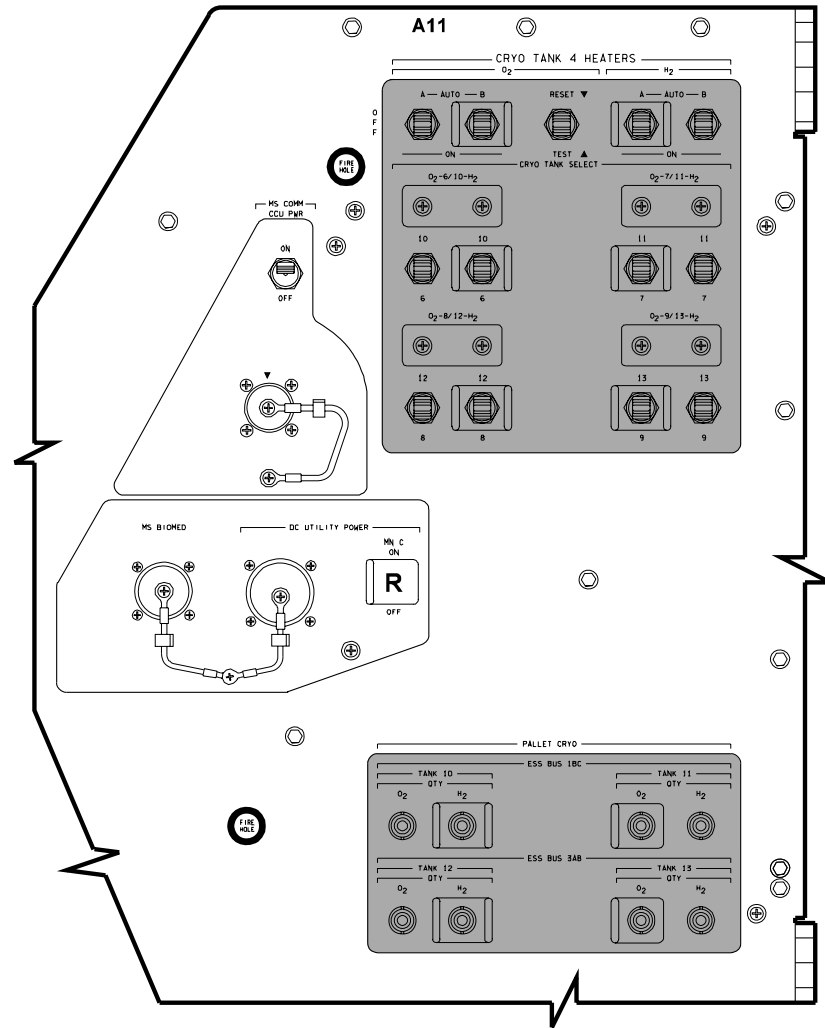


# OV104

## AIRLOCK HATCH


ACTUATOR HANDLE - LATCHED  
 LOCK LEVER - LOCKED  
 EQUALIZATION VLV (TWO) - NORM  
 -CAPS INSTALLED

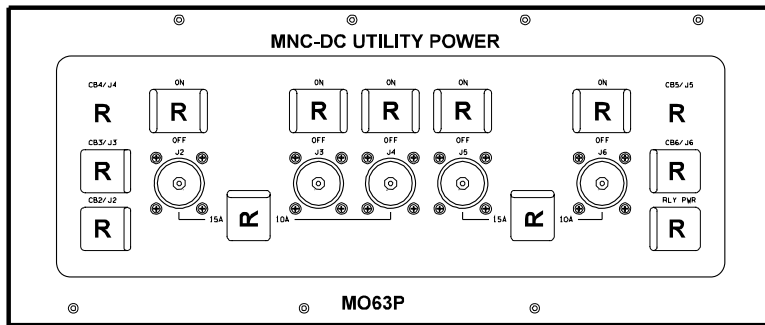


## PNL MO58F

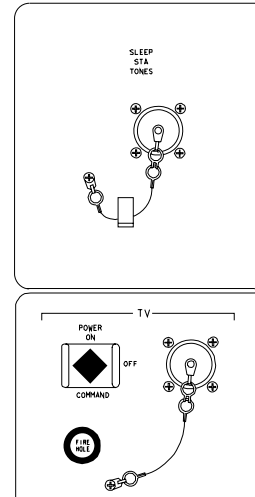


## PNL MO30F

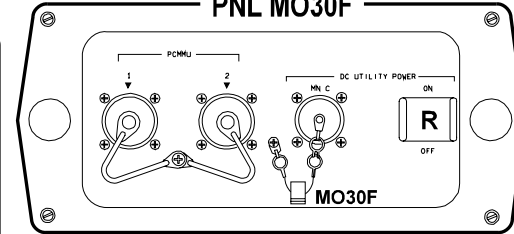


## PNL MO52J

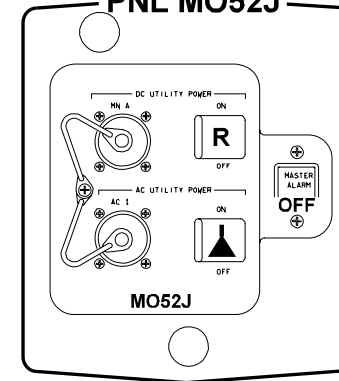

## PNL MO39M



## PNL MD24K




NOTE: NOT VISIBLE IF MAR FLOWN

## PNL MD44F

CAB TEMP CNTL ACT LINKAGE - SECONDARY ACTUATOR


## PNL ML85E

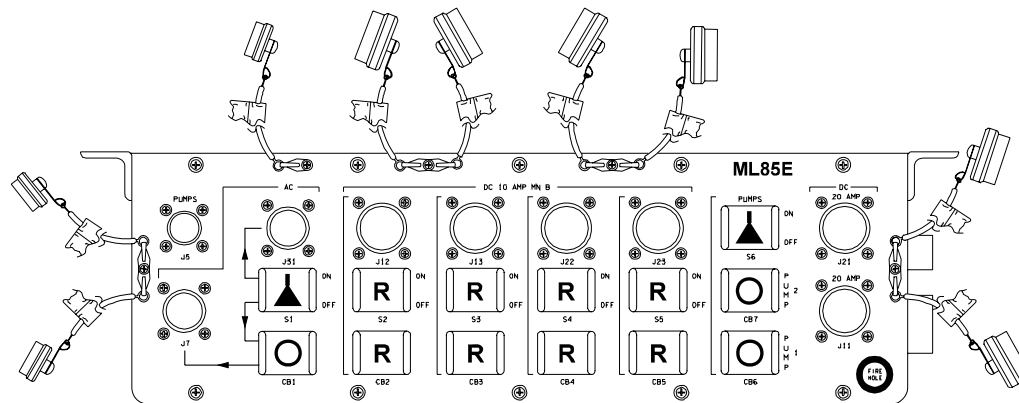

# OV104

OV104





PNL ML86B

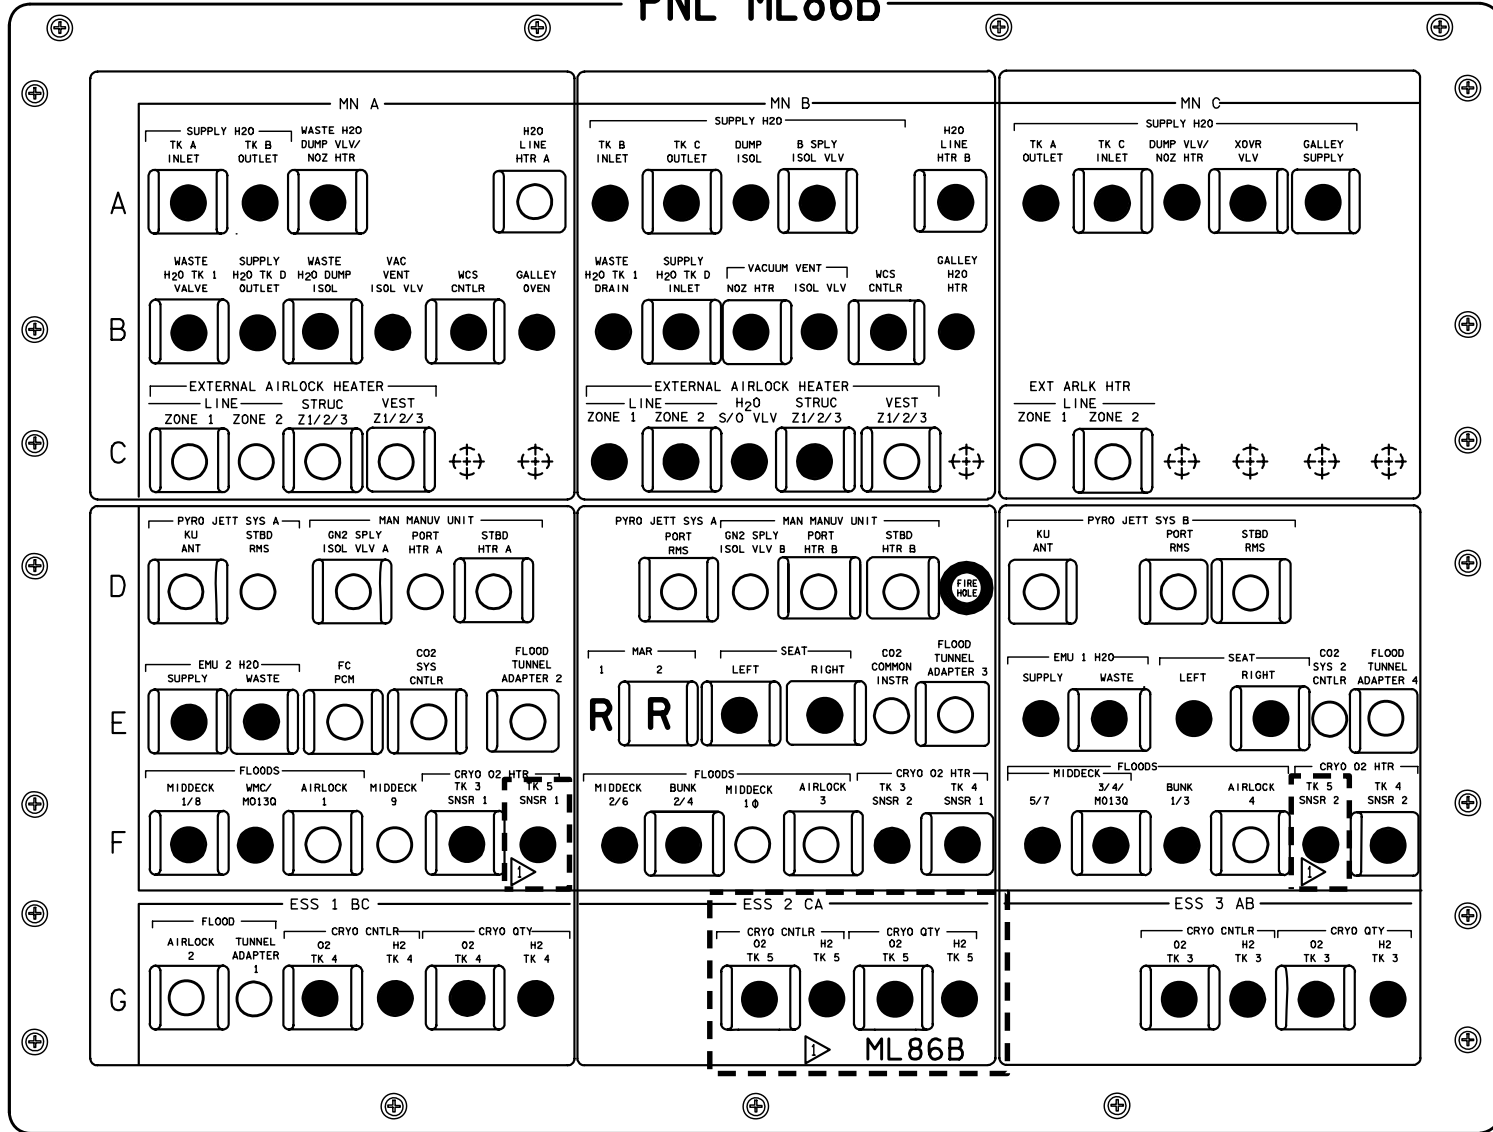

NOTE: ▷ OPEN IF TK 5 NOT FLOWN


OV104


OV104

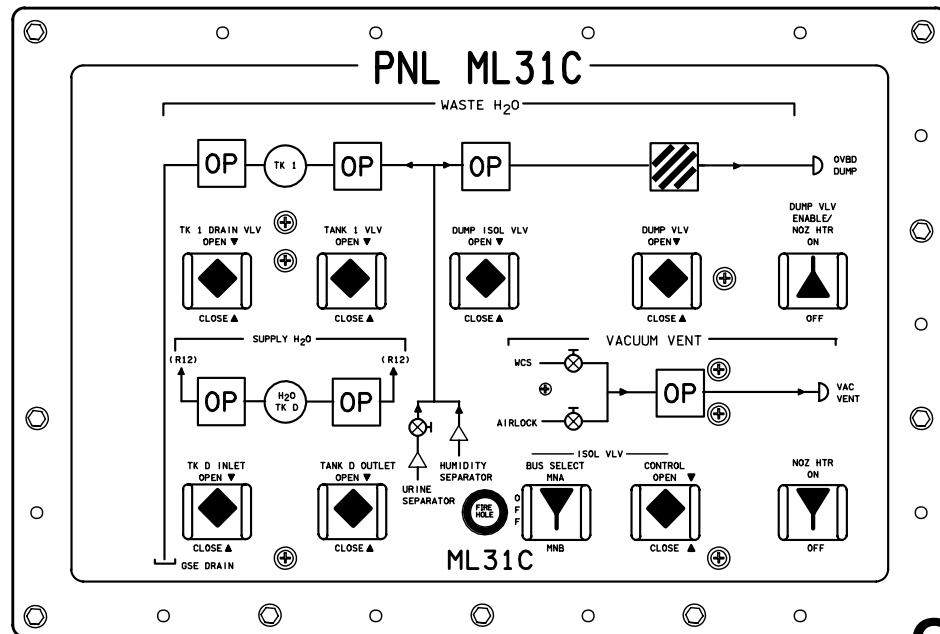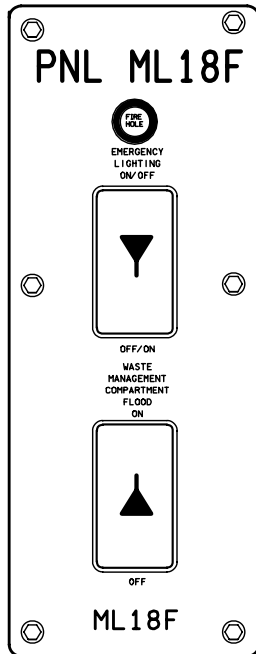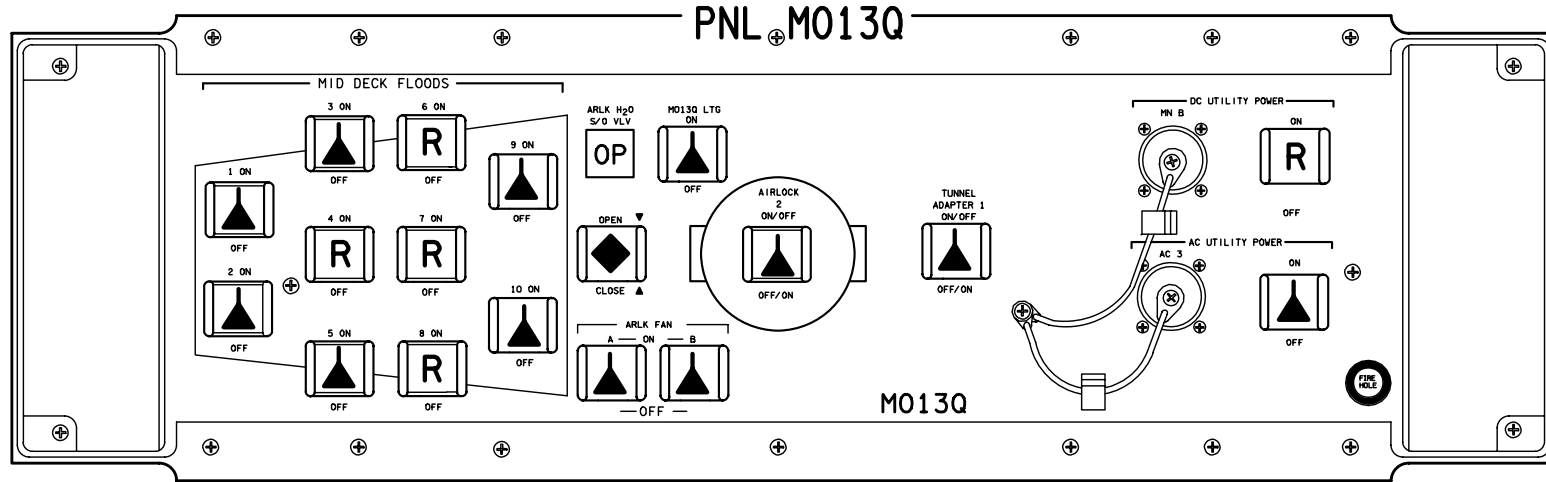




OV104

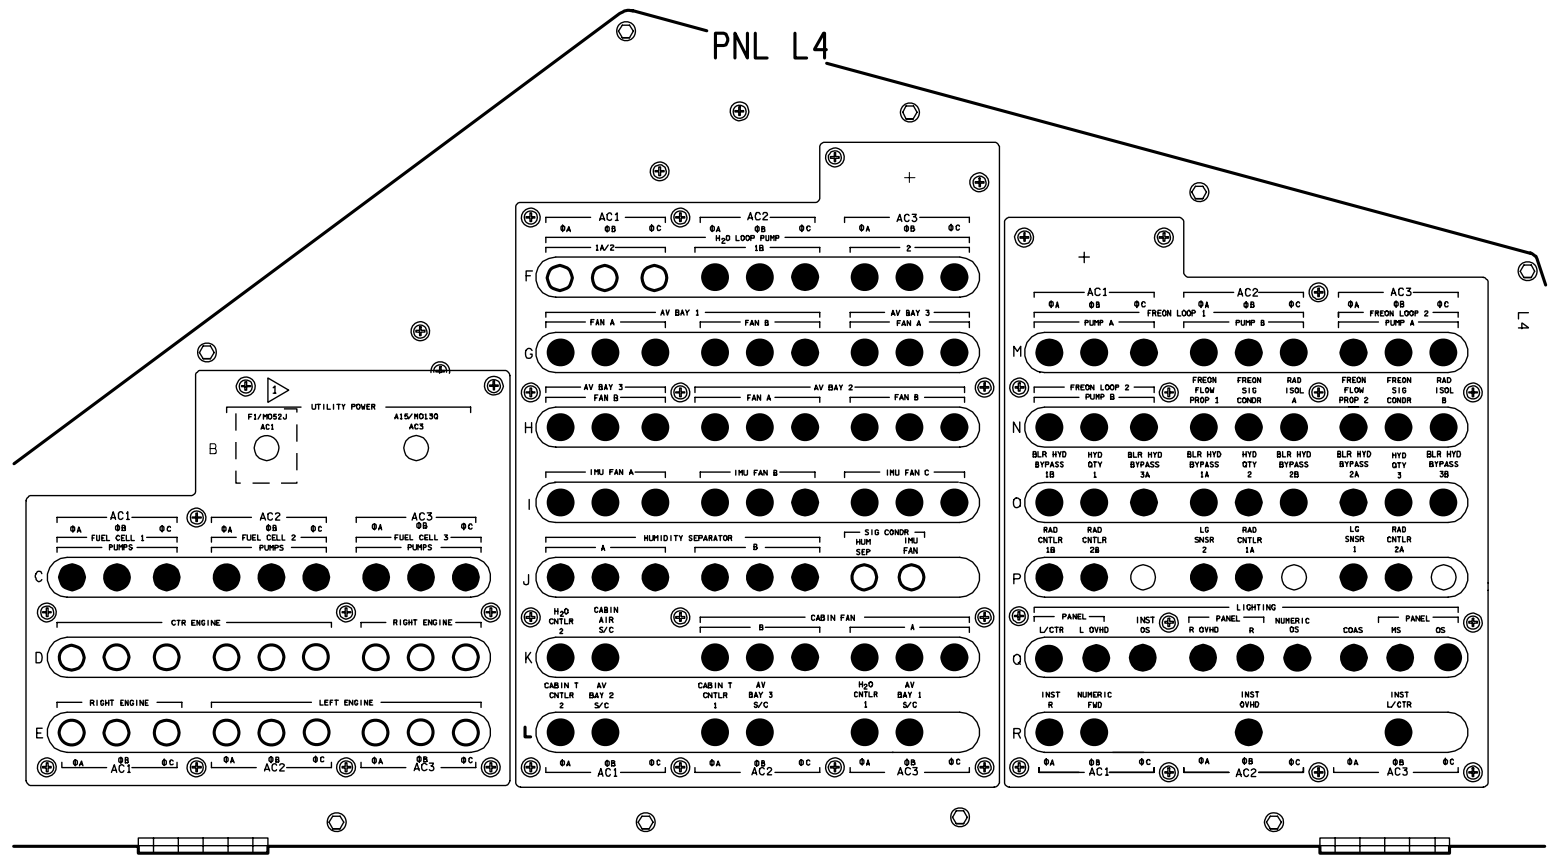

NOTE:  CB CAN REMAIN CLOSED FOR AC PGSC USAGE.  
 OPEN WHEN PGSC UNPOWERED/STOWED


OV104

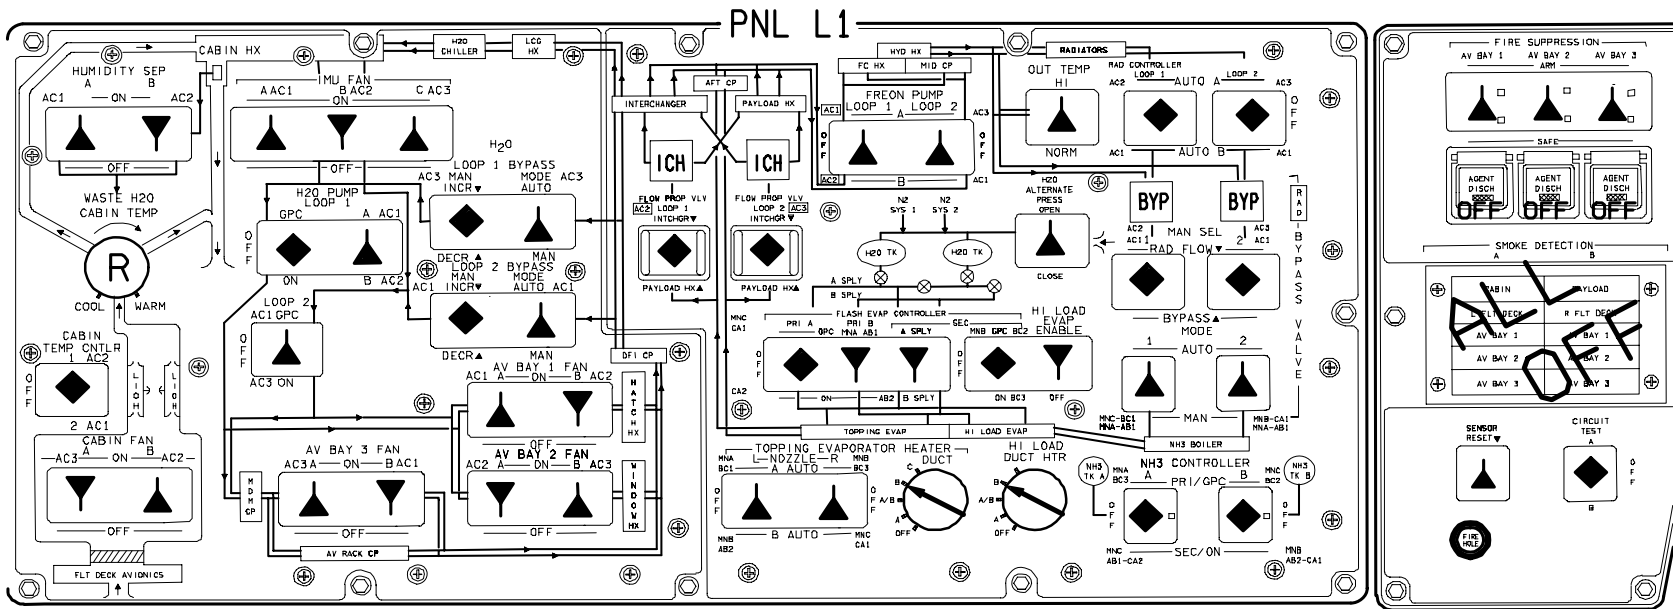

OV104



OV104/DATE 12/10/02

PNL L2


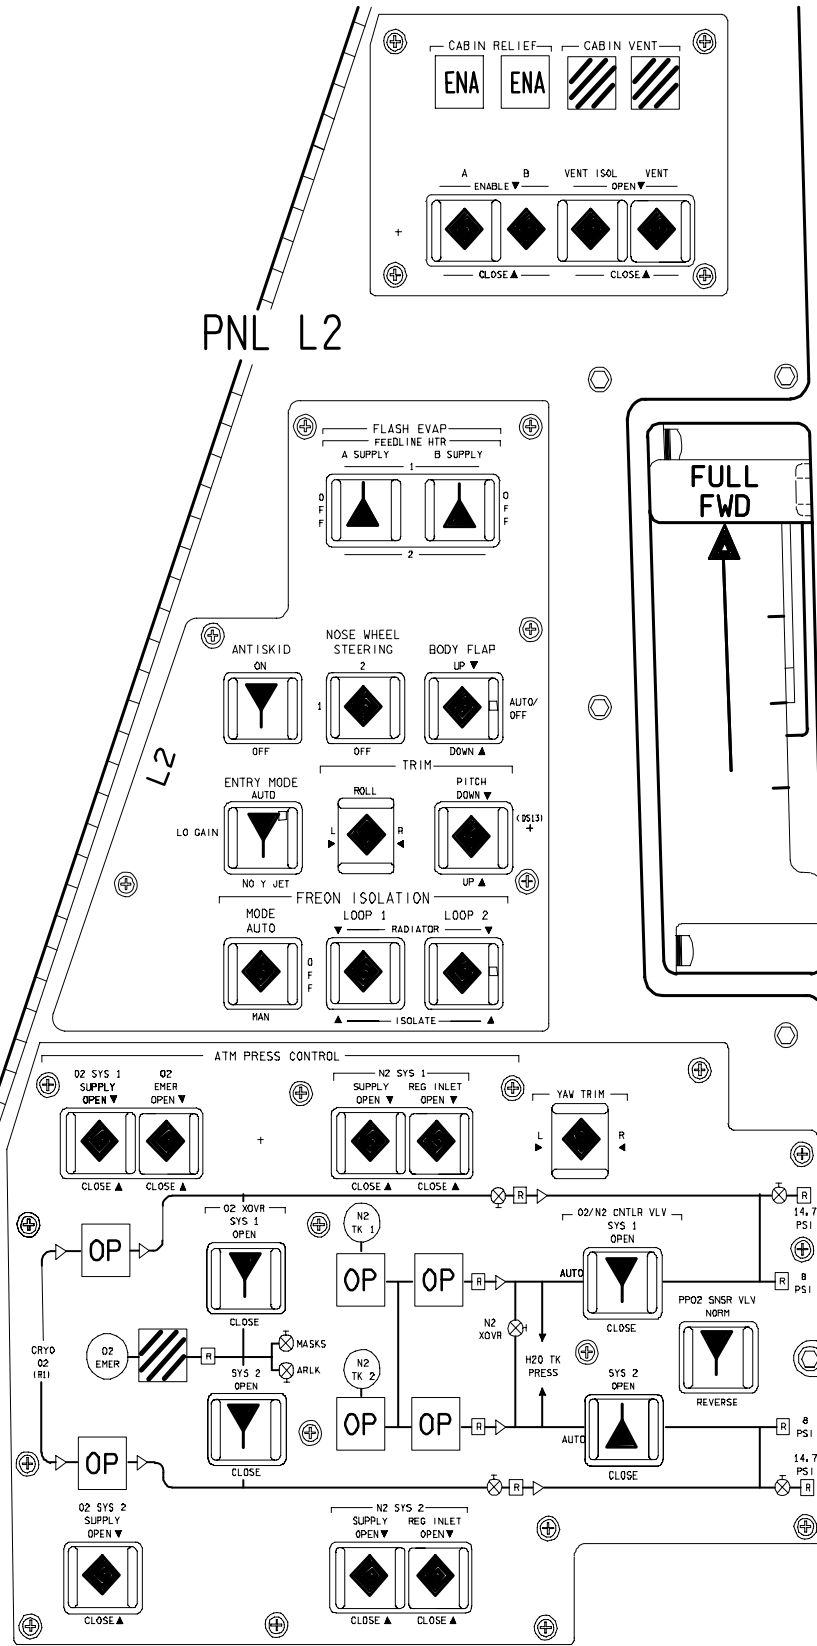


48015C315\_114, PNL, I


OV104


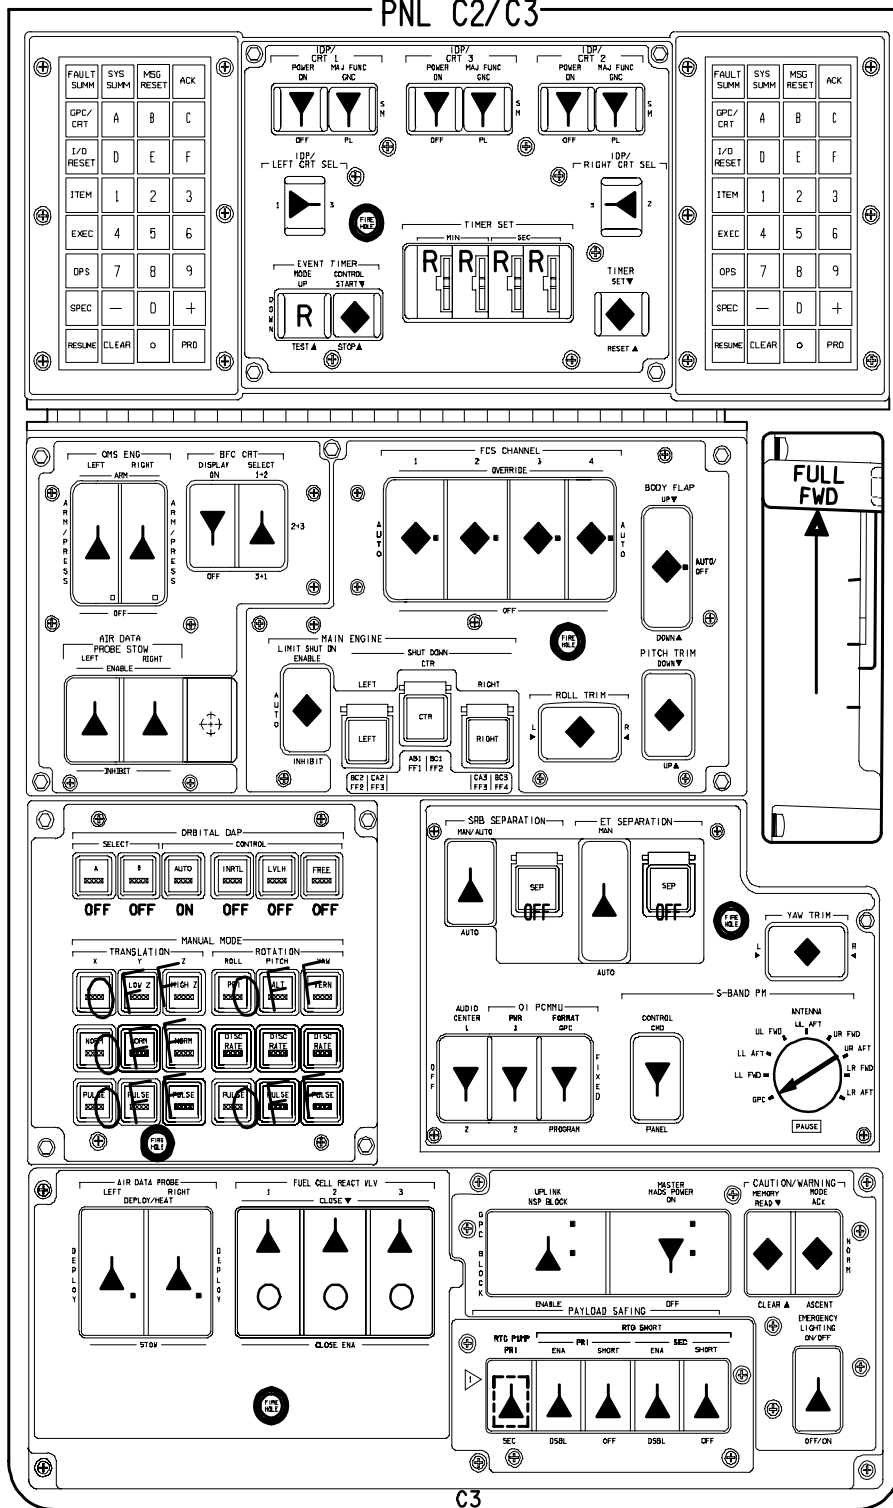


OV104

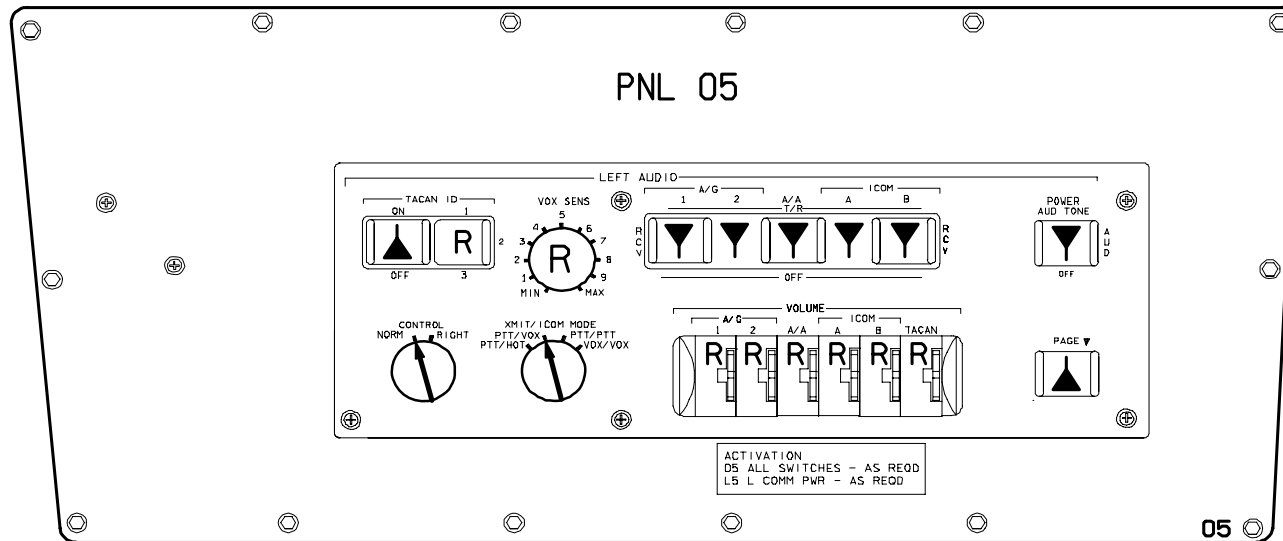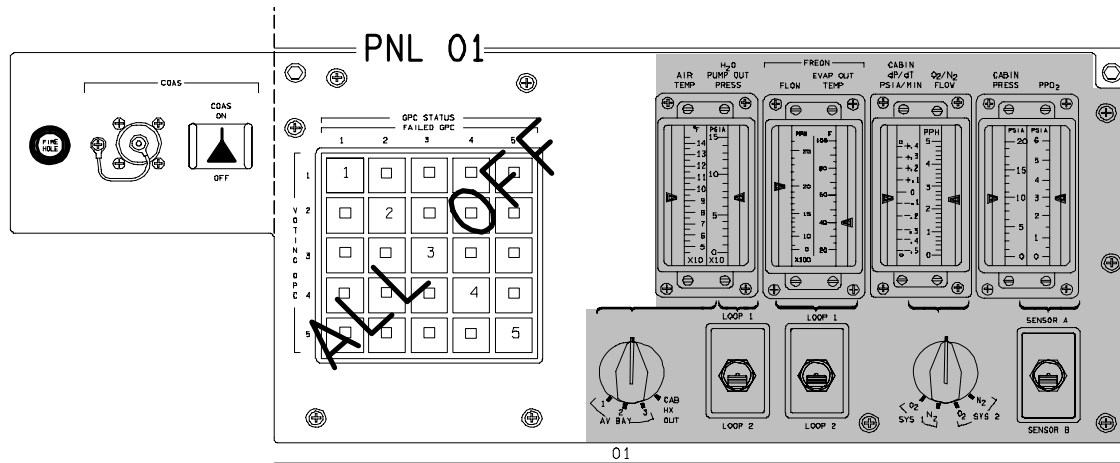


PNL 06


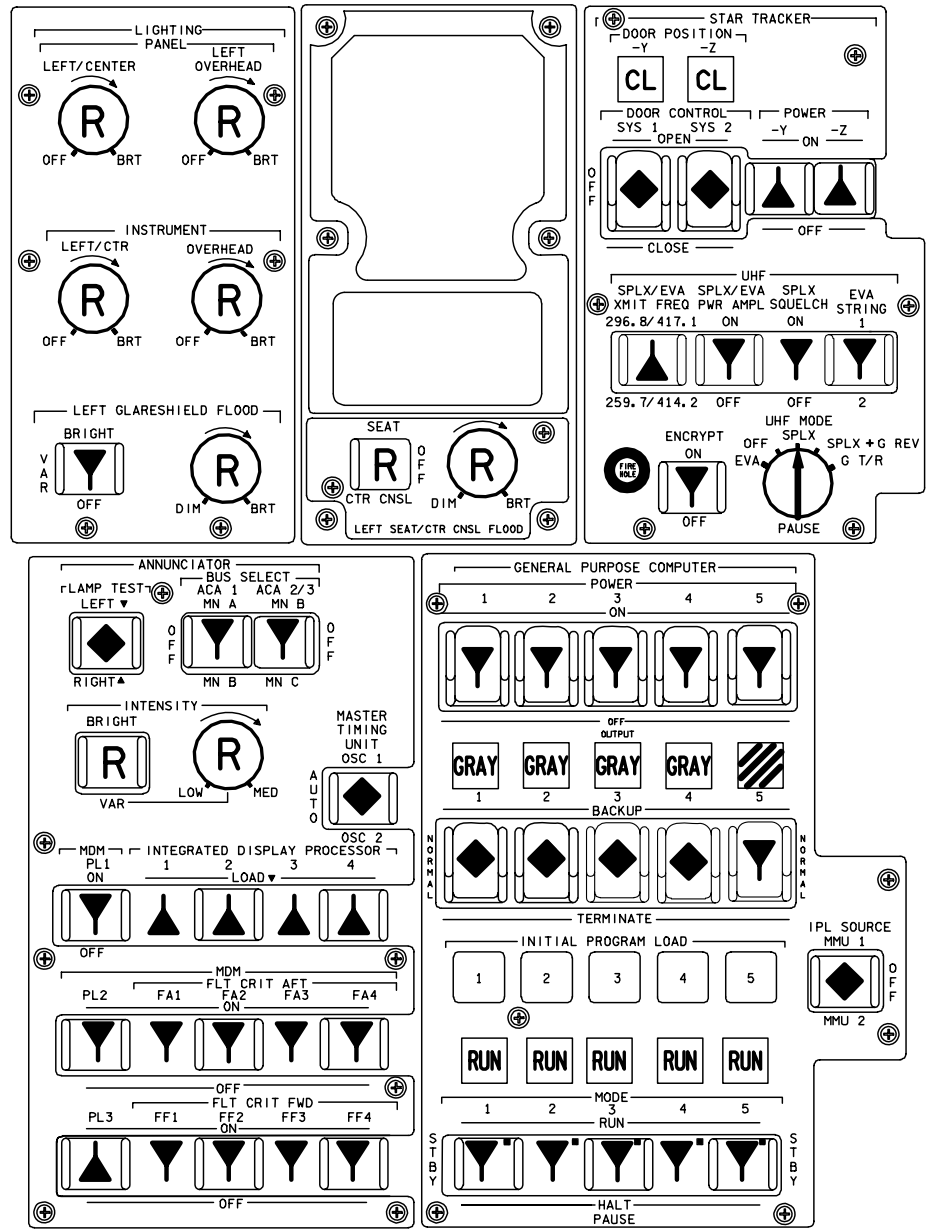


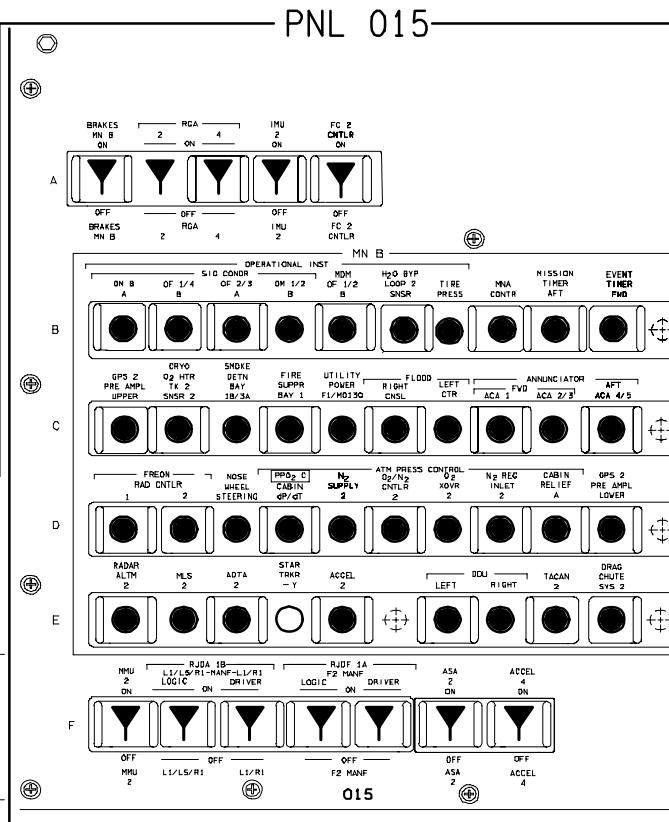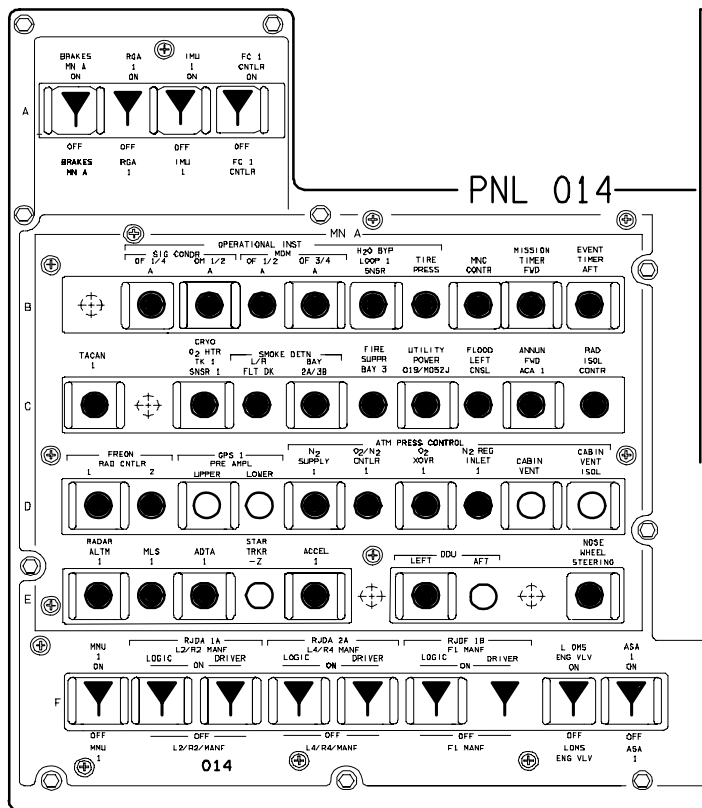

# OV104

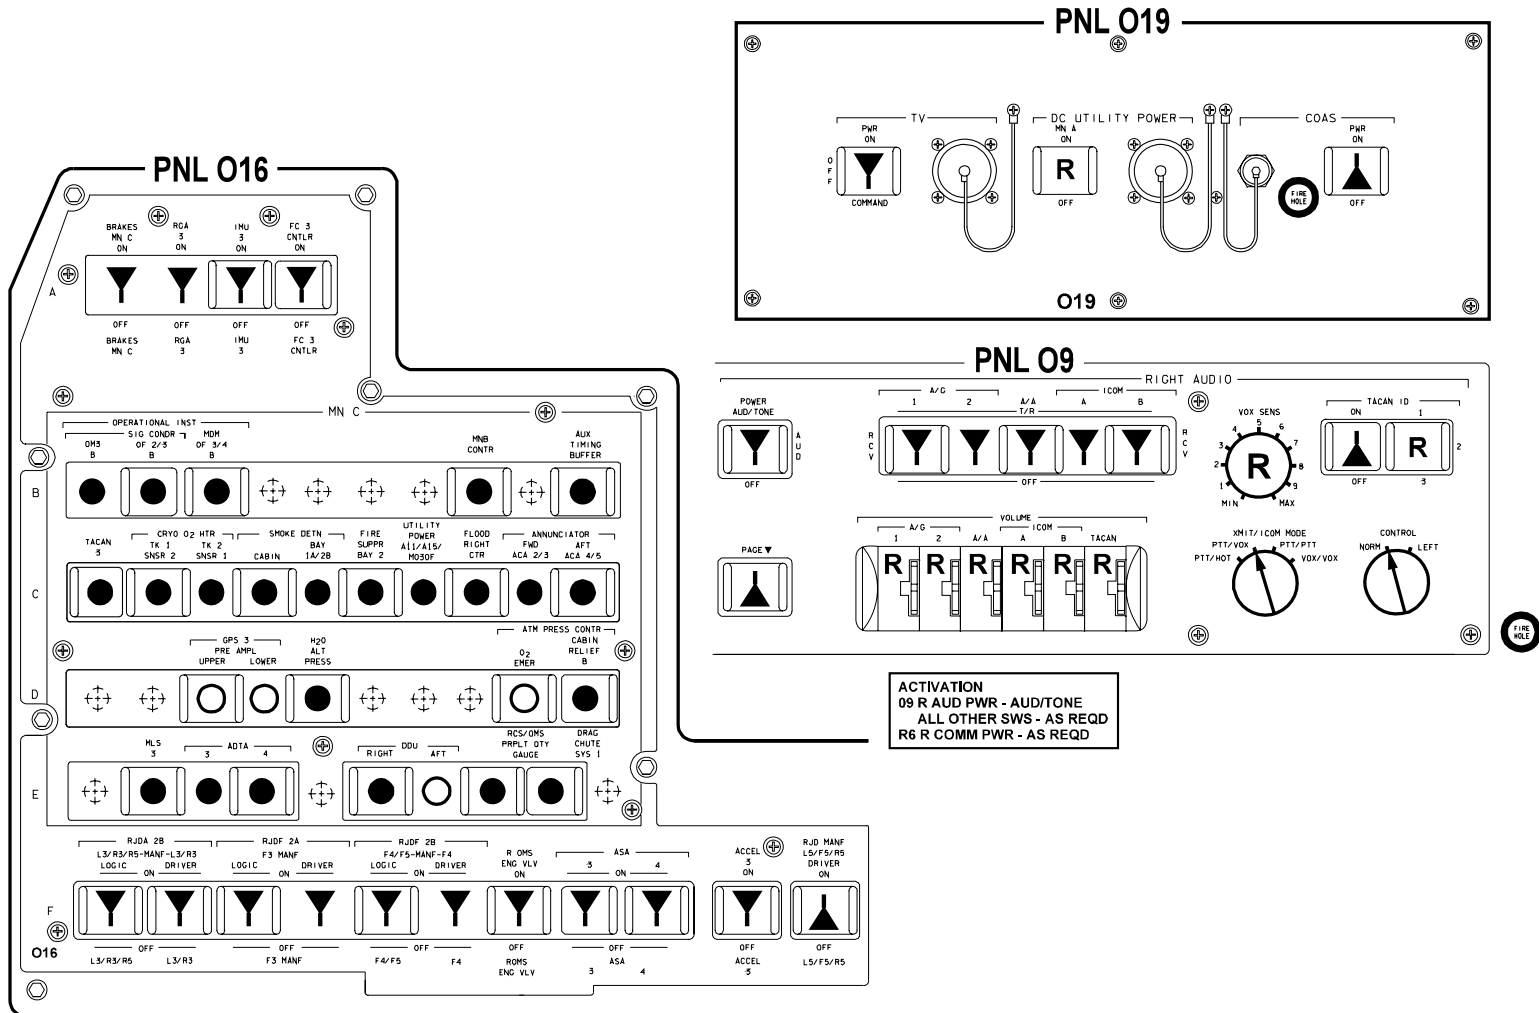



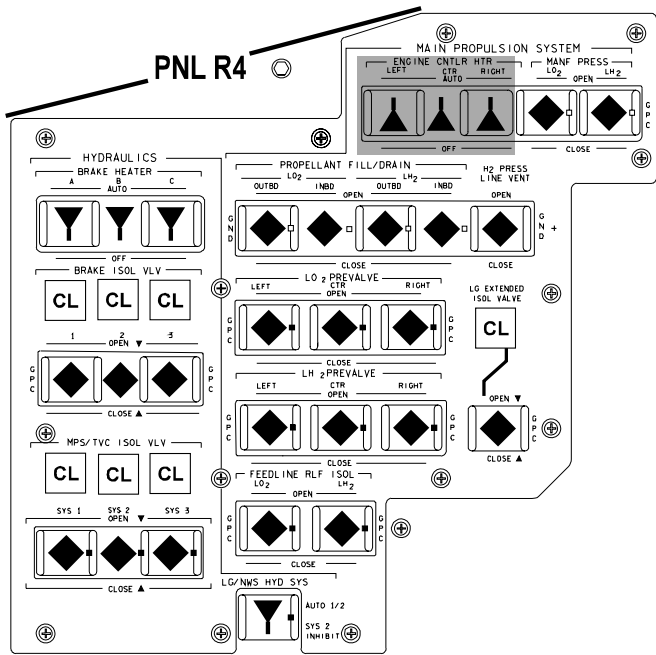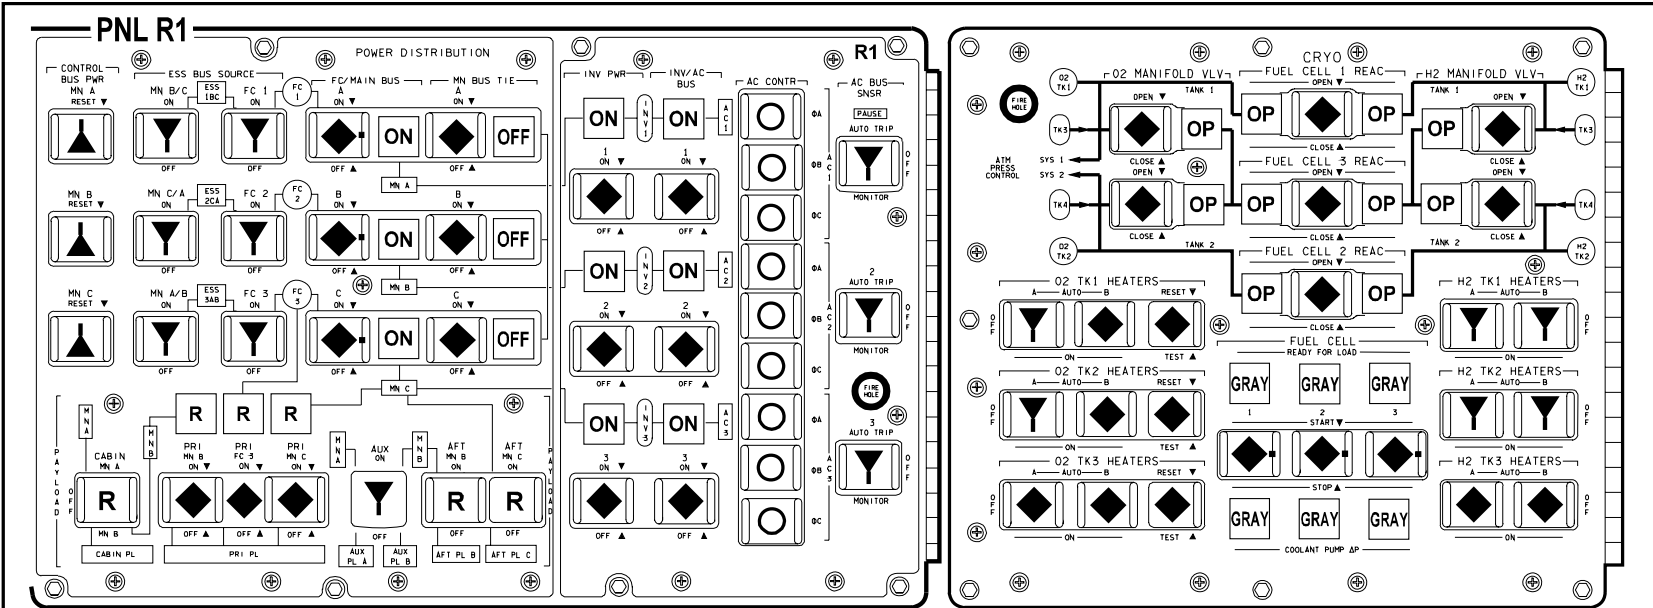

48015F321\_115, PNL 1


ALL VEH/DATE 06/27/06

(OV104) B3-21



**OV104**

D/O/ALL/GEN Q

OV104


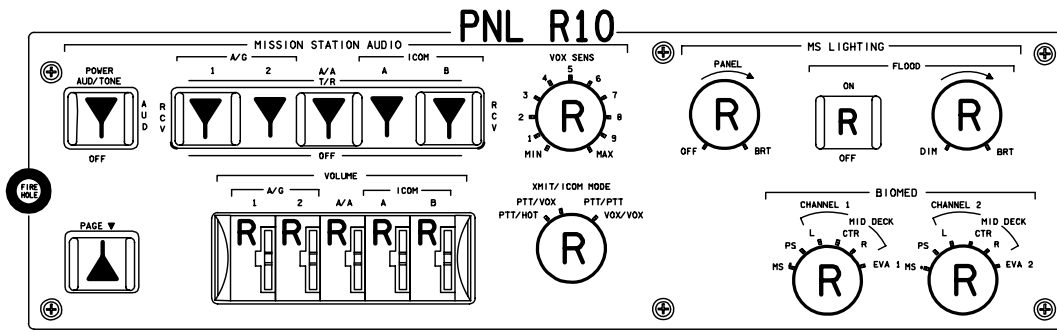


ACTIVATION  
 R10 MS AUD PWR - AUD/TONE  
 ALL OTHER SWS - AS REQD  
 R12 MS AUD CONTL - NORM  
 A11 MS COMM CCU PWR - ON

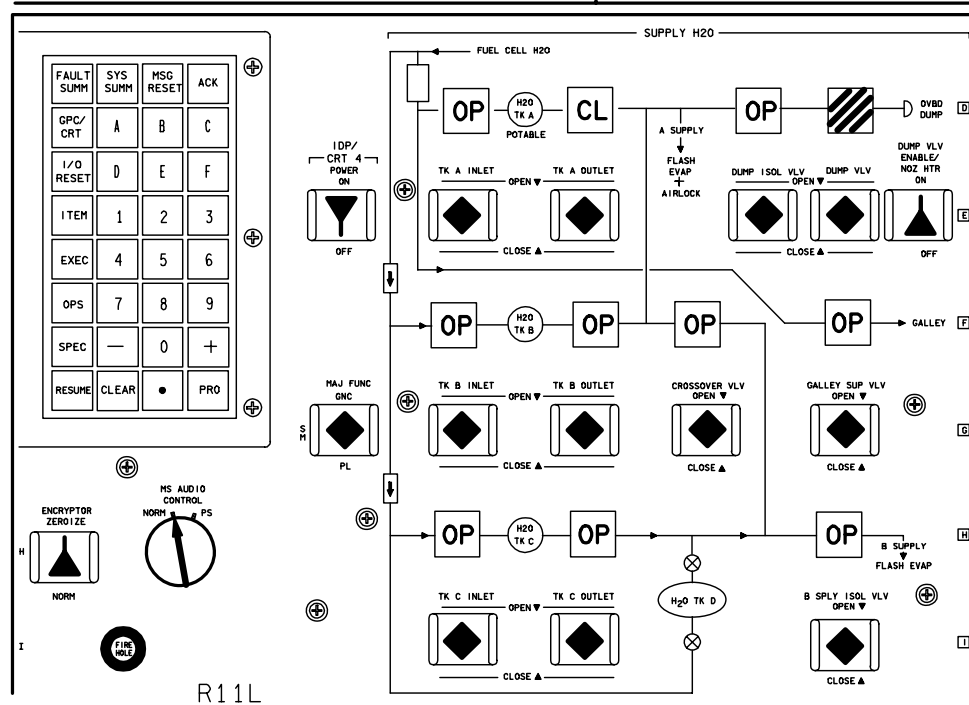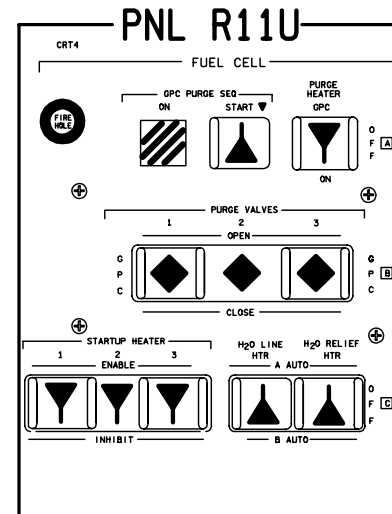


OV104

# OV104

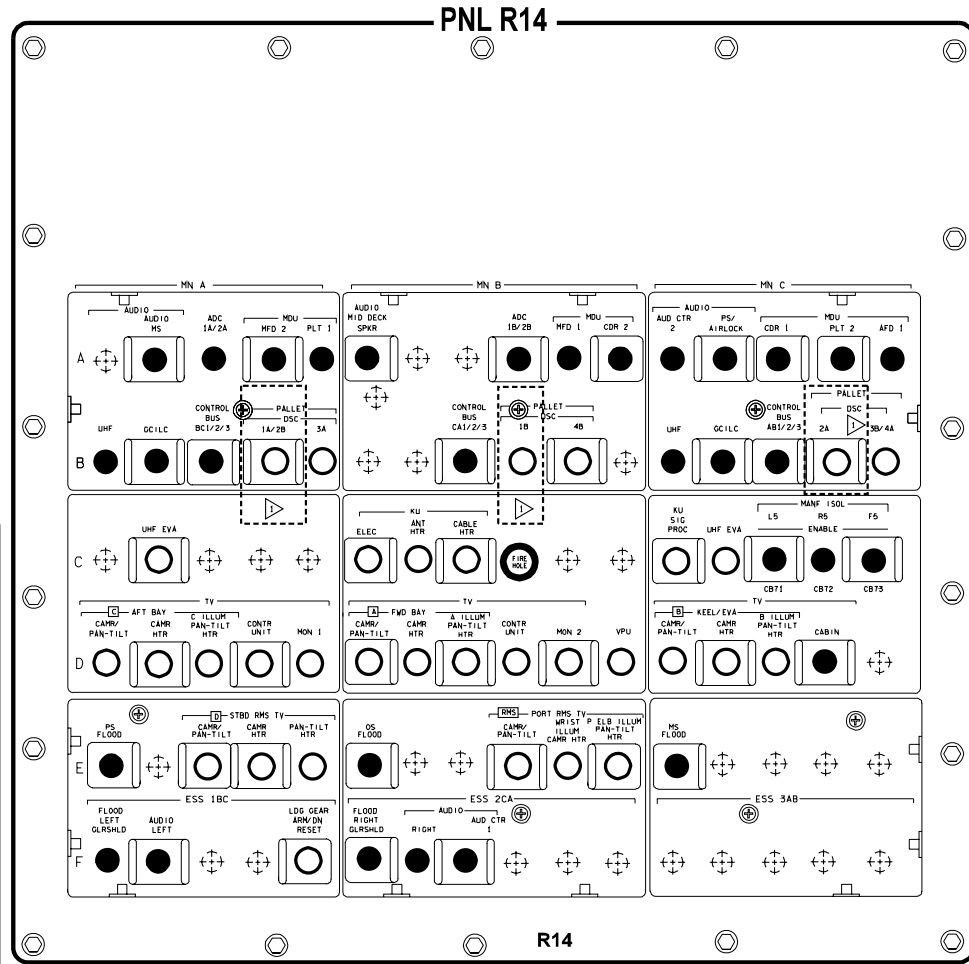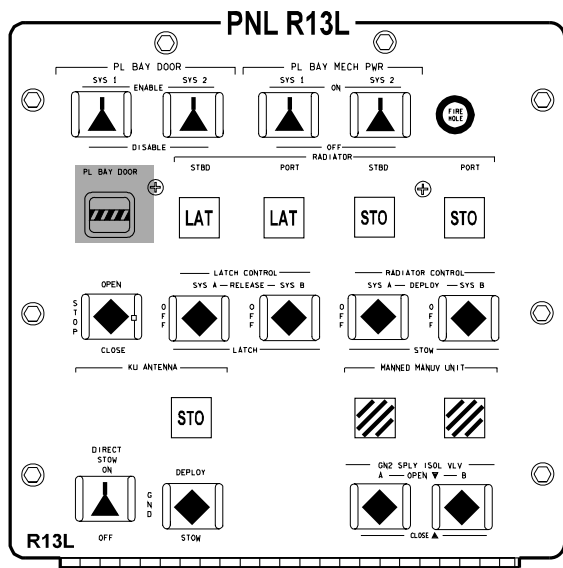




NOTE: ▷ CLOSED IF EDO

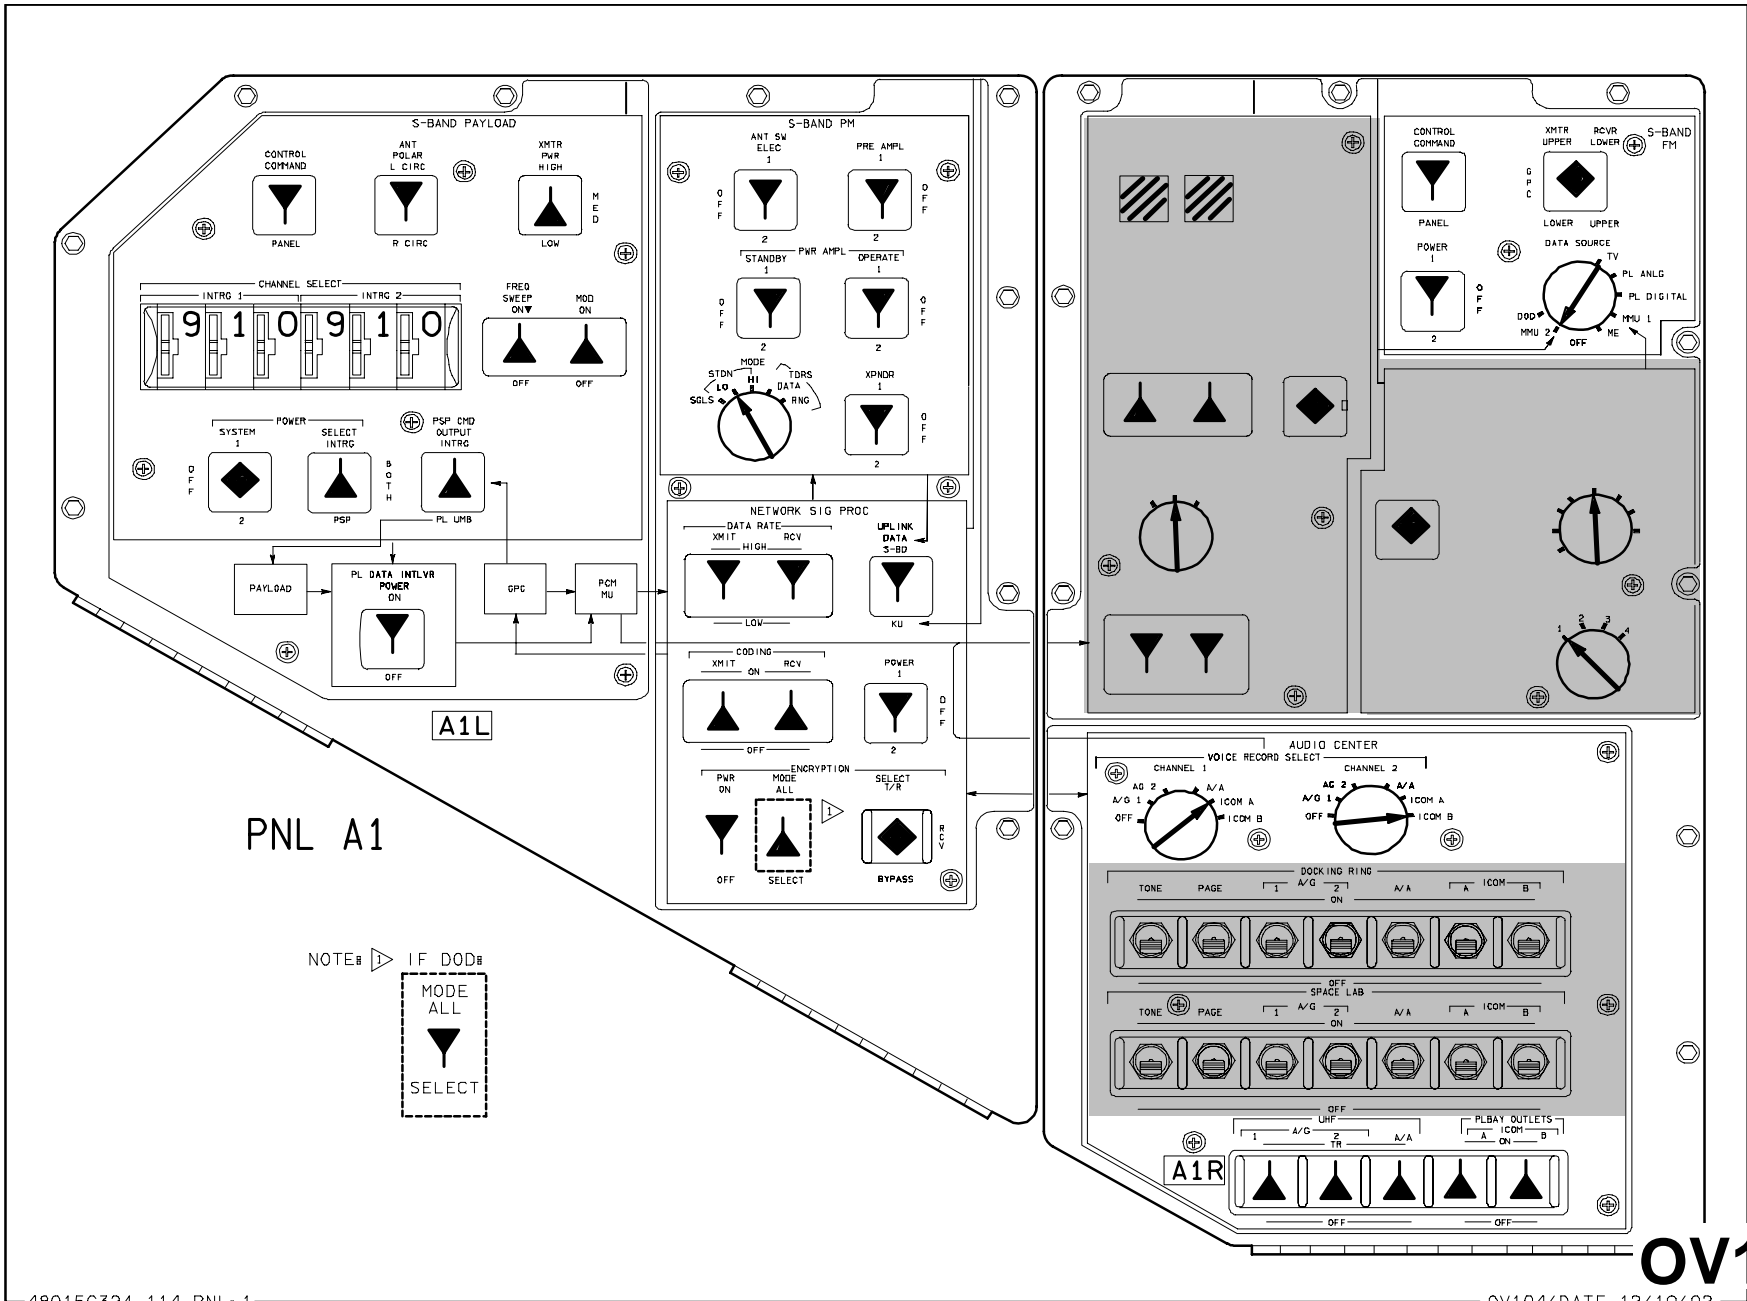

PNL A1


NOTE: IF DOD  
 MODE ALL  
 SELECT

**OV104**

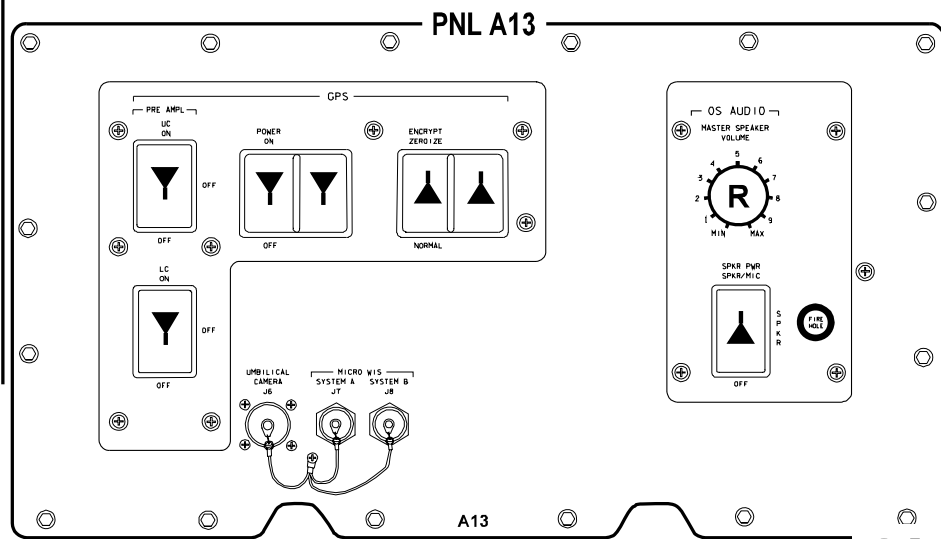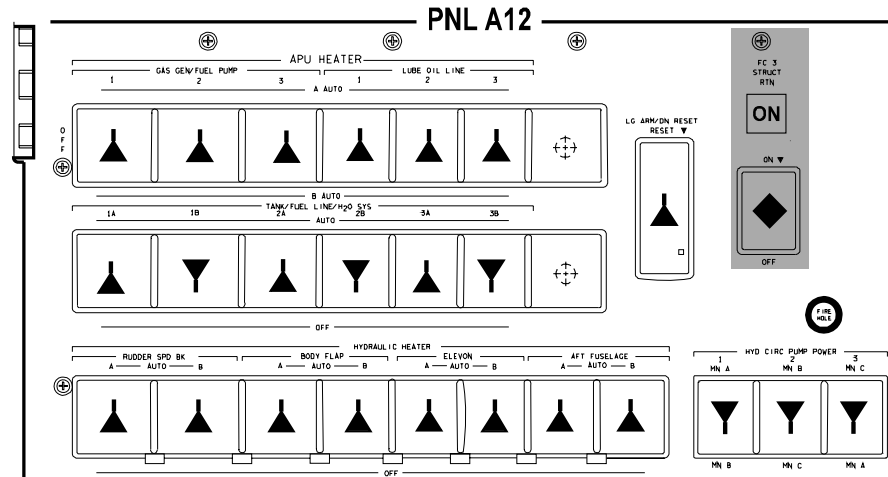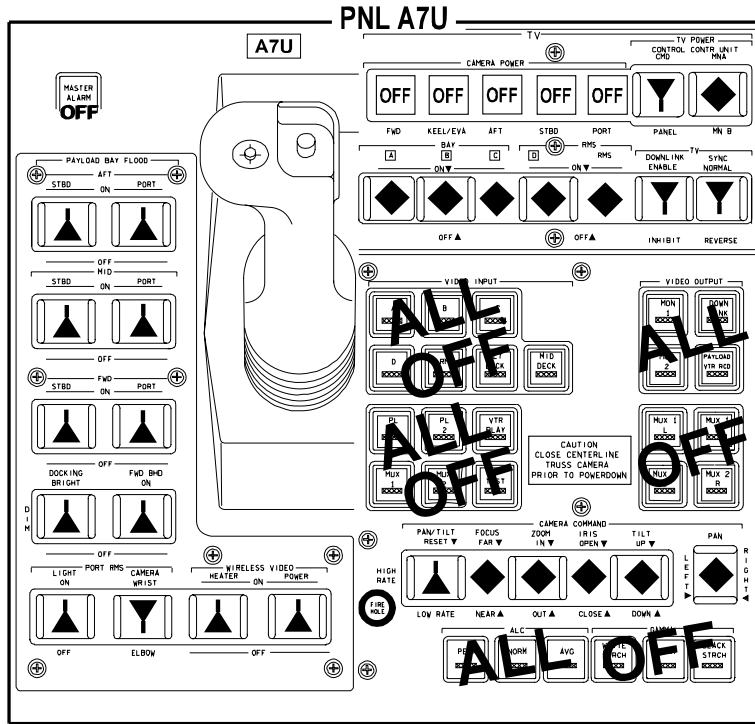

OV104

PNL L9


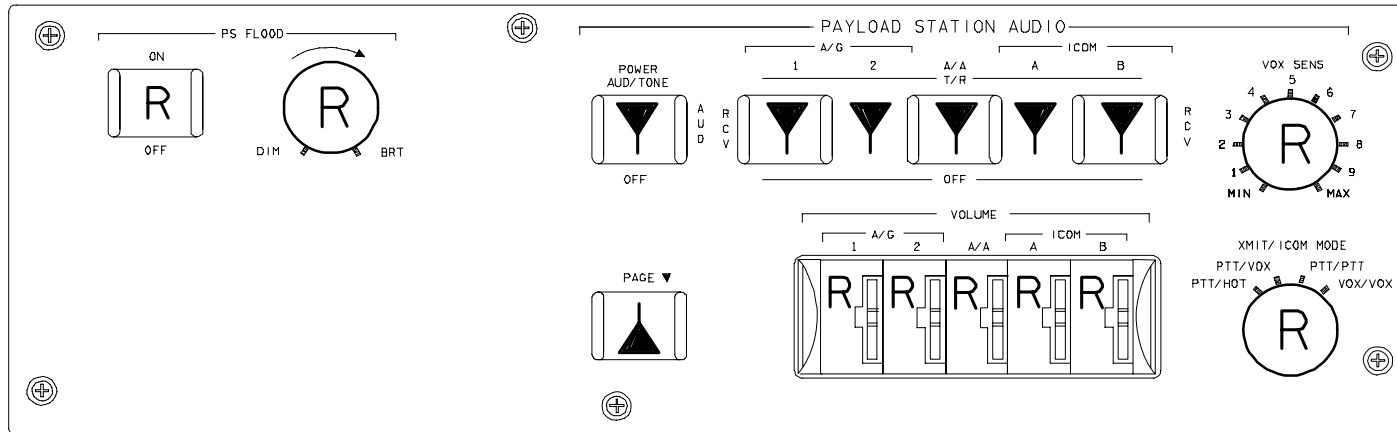


ACTIVATION  
L9 ALL SWITCHES - AS REQD  
A15 PS COMM CCU PWR - ON

L9

OV104

PNL A6L

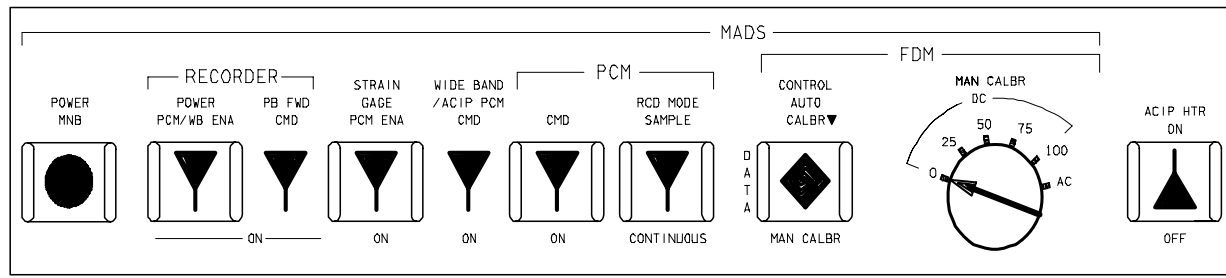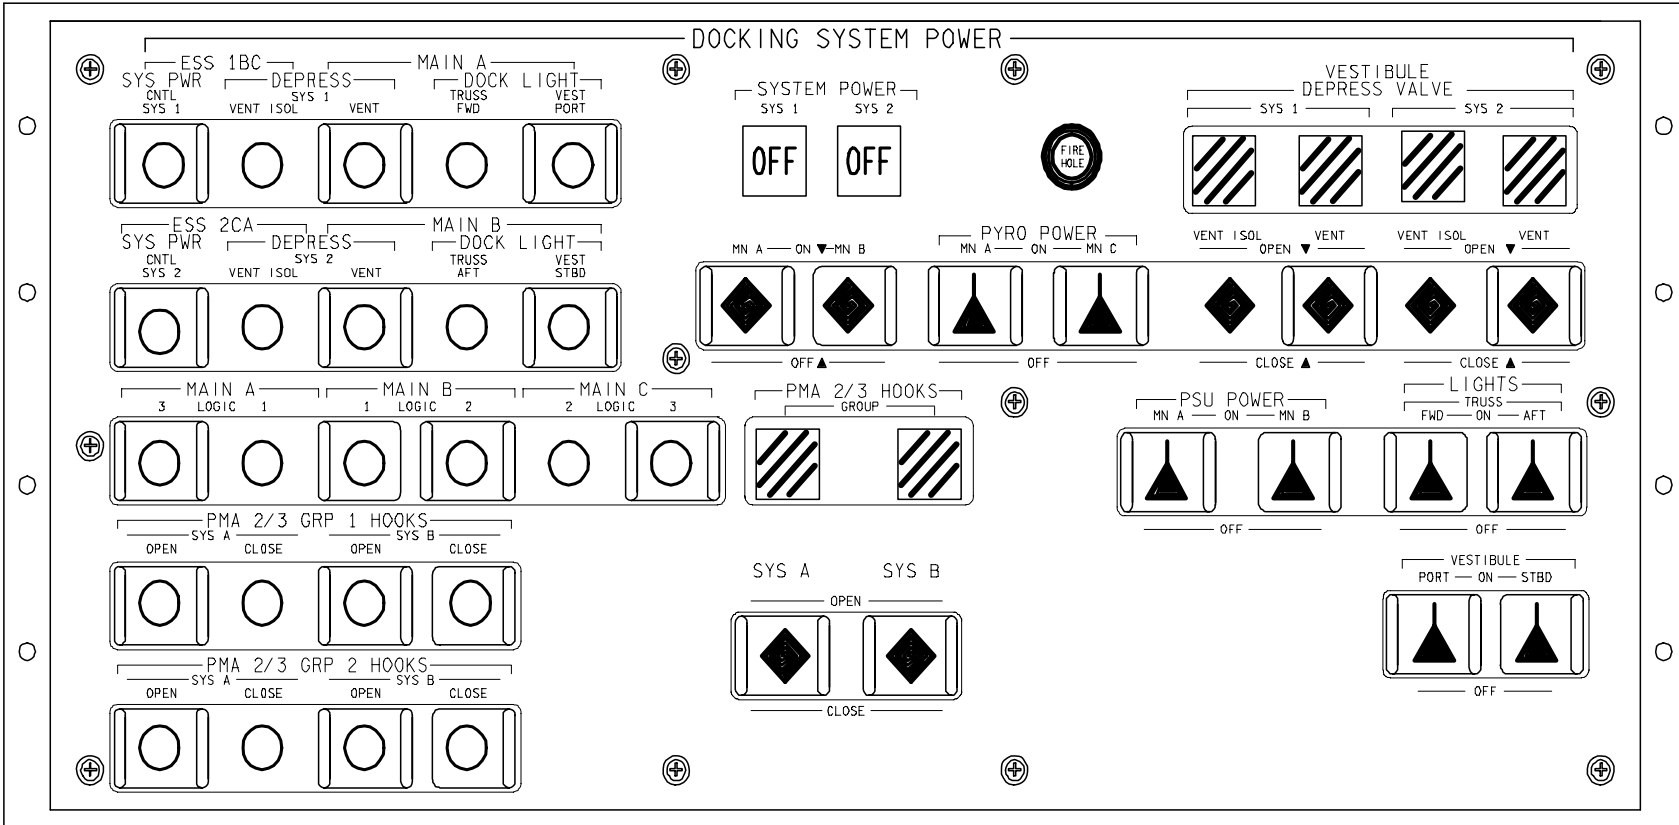

OV104

OV104

**CONTROL PANEL POWER**

A ON OFF      B ON OFF      C ON OFF

**HEATERS/DCU POWER**

H1 ON OFF      H2/DCU ON OFF      H3/DCU ON OFF

**APDS POWER**

A<sub>Ds</sub> ON OFF      B<sub>Ds</sub> ON OFF      C<sub>Ds</sub> ON OFF

**STATUS**

POWER	ON	INITIAL	CONTACT
APDS PROTECT	CIRCUIT OFF	CAPTURE	CAPTURE
RING	ALIGNED	RING	FORWARD POSITION
RING	INITIAL POSITION	TO HOOK	
FIXERS	OFF	INTER	SEALED
HOOKS 1	OPEN	HOOKS 1	CLOSED
HOOKS 2	OPEN	HOOKS 2	CLOSED
LATCHES	CLOSED	LATCHES	OPEN
UNDOCK	COMPLET	RING	FINAL POSITION

**PYROS**

A<sub>p</sub> ON OFF      B<sub>p</sub> ON OFF      C<sub>p</sub> ON OFF

Ap OFF      Cp

**FIRE HOLE**

**PYRO PROTECT**      **CIRCUIT OFF**

**PYRO COMMANDS**

PYRO CIRC PROT OFF      PYRO CIRC PROT ON

ACT HOOKS FIRING      PAS HOOKS FIRING

**APDS CONTROL COMMANDS**

OPEN HOOKS      OPEN LATCHES

UNDOCKING

A<sub>Ds</sub> OFF      B<sub>Ds</sub>      C<sub>Ds</sub>

LAMP TEST

PNL A7L

**APDS CONTROL COMMANDS**





POWER ON	POWER OFF	RING OUT	RING IN
APDS CIRC PROT OFF	CLOSE HOOKS	CLOSE LATCHES	FIXER OFF

APDS CONTROL PANEL




OV104





A15

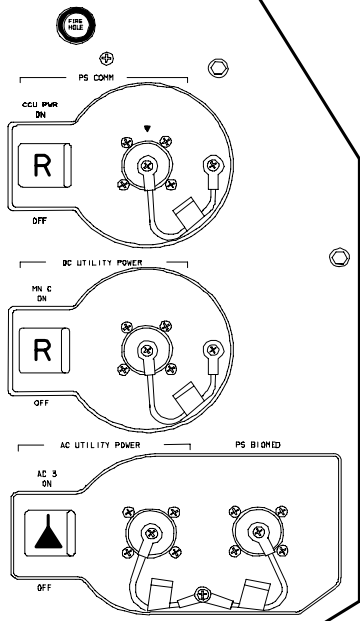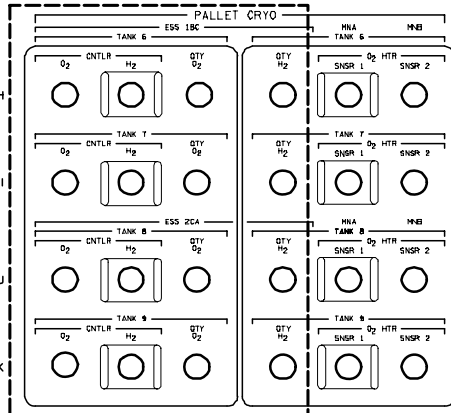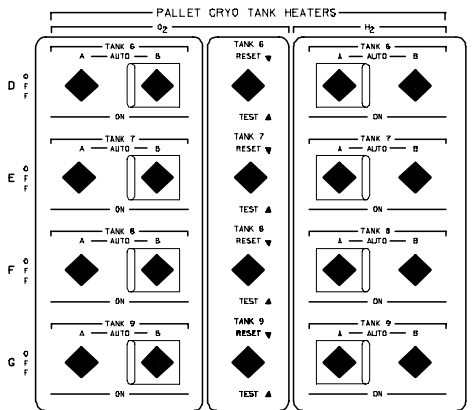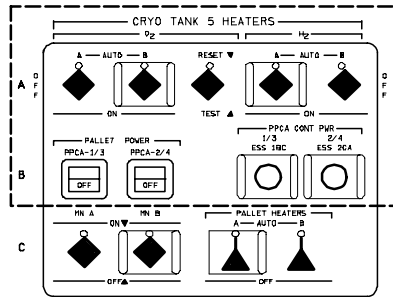

▶ cbs CLOSED FOR EDO MISSIONS

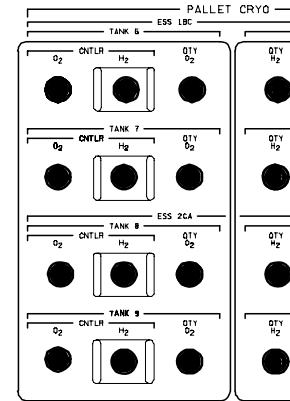




# OV104


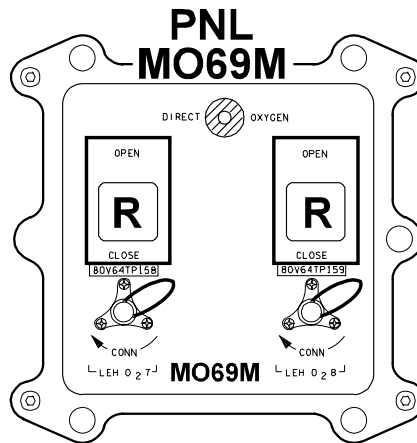
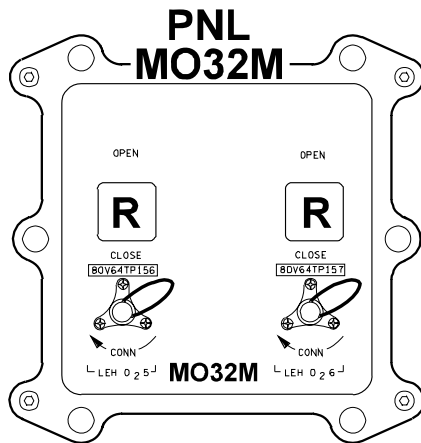
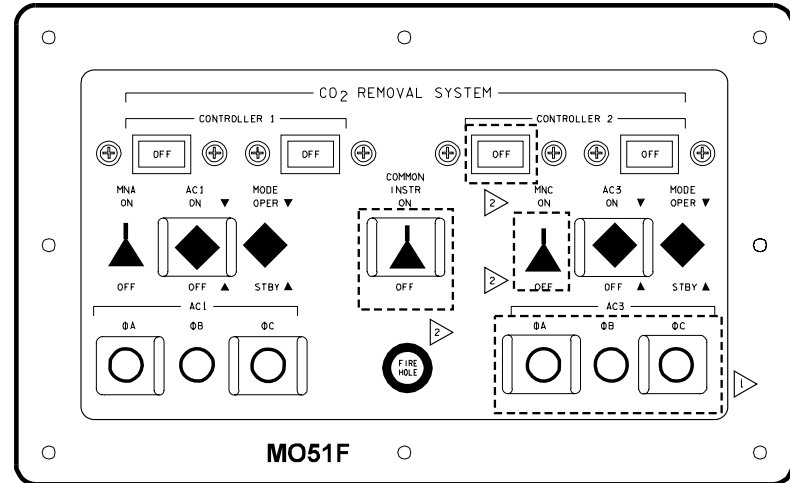
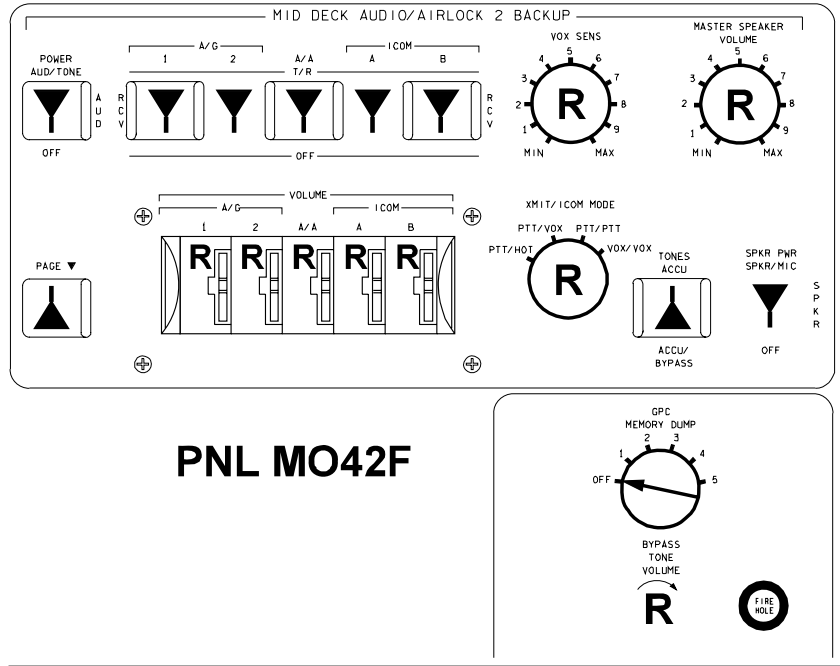


NOTES: ▷ CLOSED IF CO2 RMVL SYS FLOWN  
▷ ON IF CO2 RMVL SYS FLOWN



# OV104

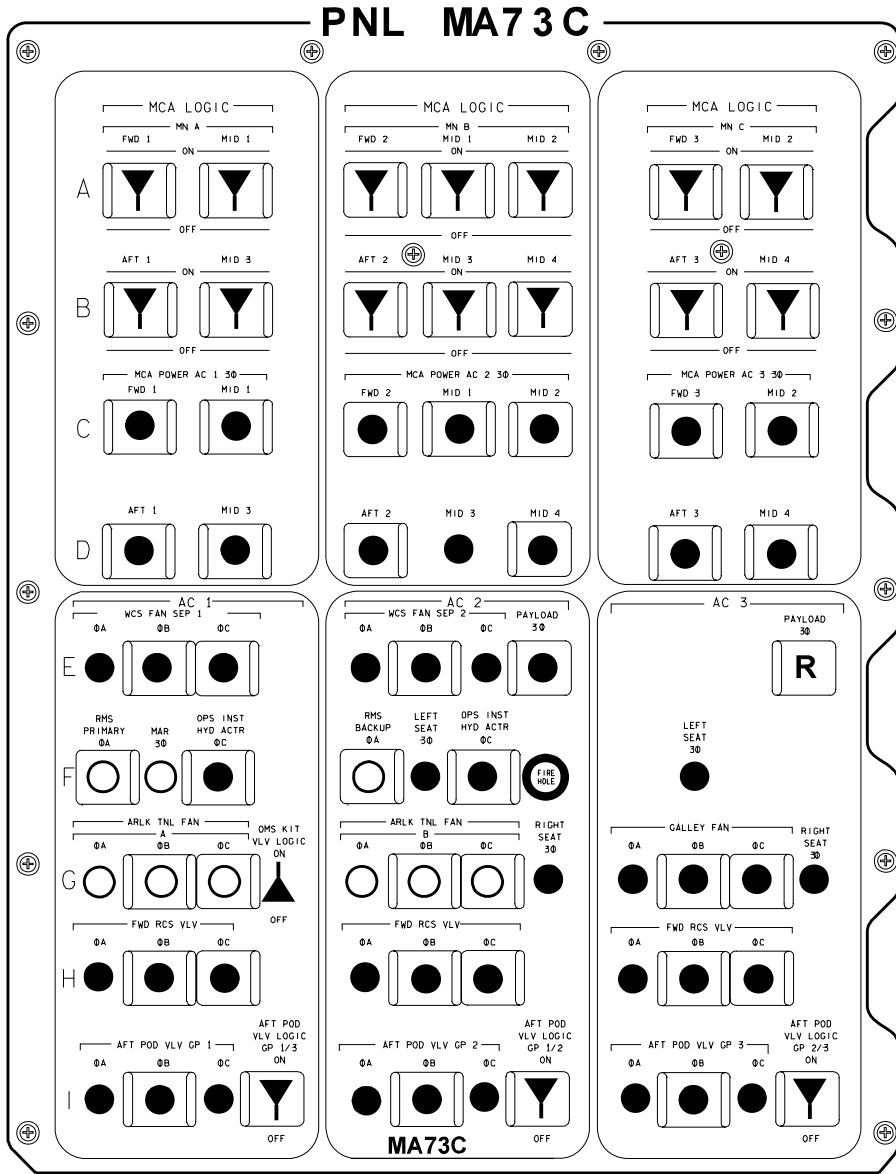

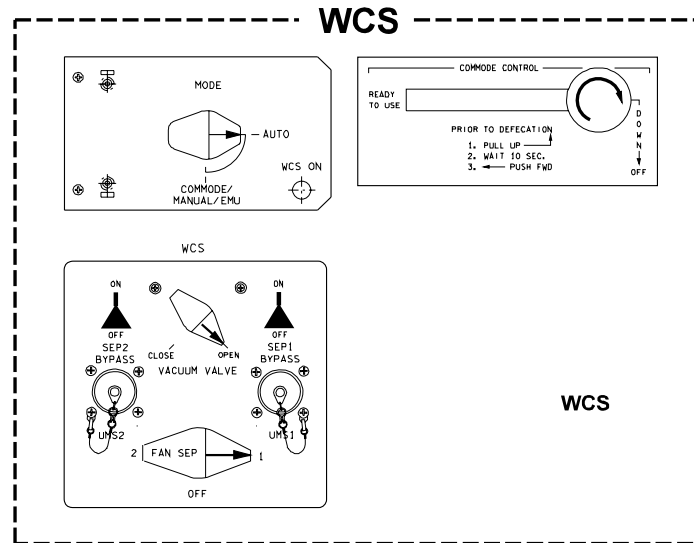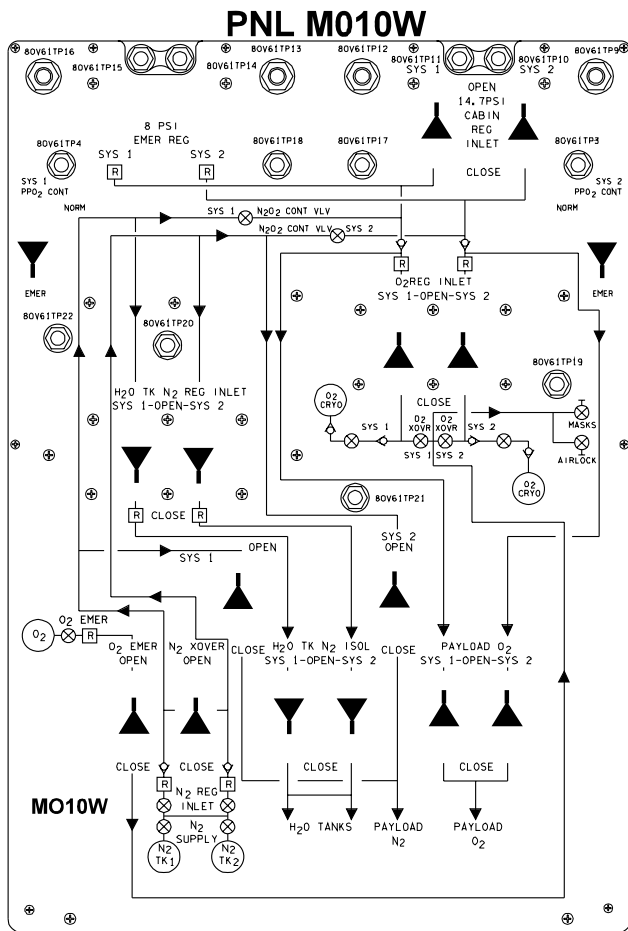

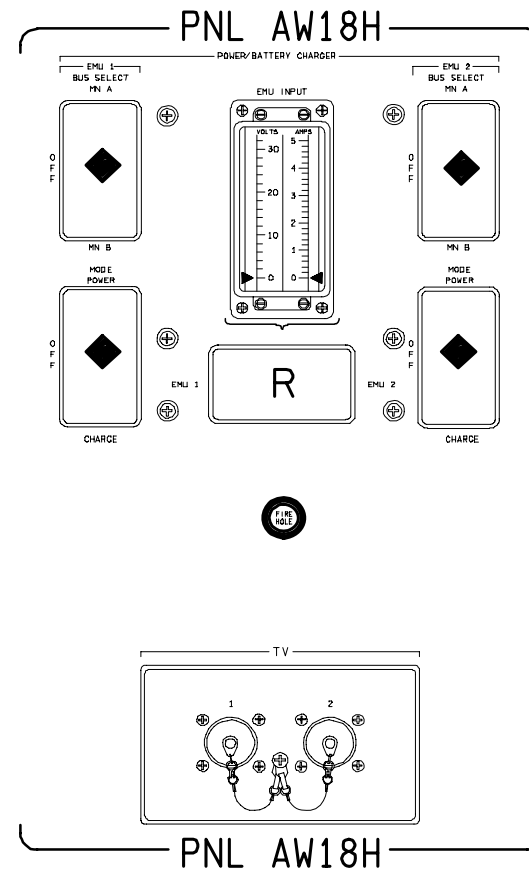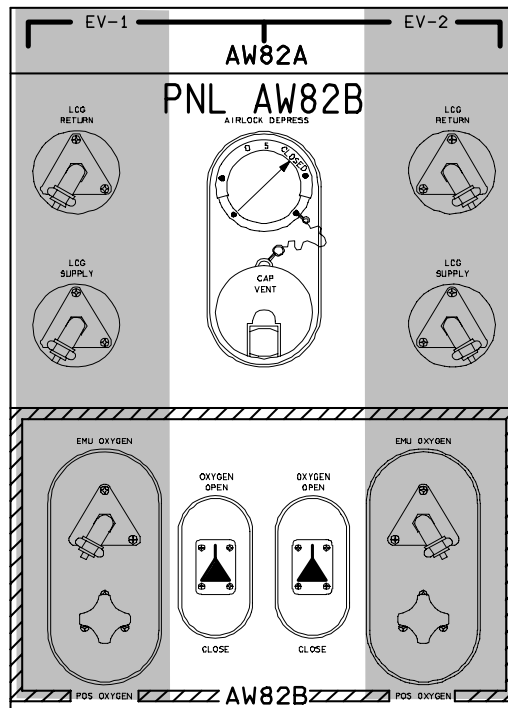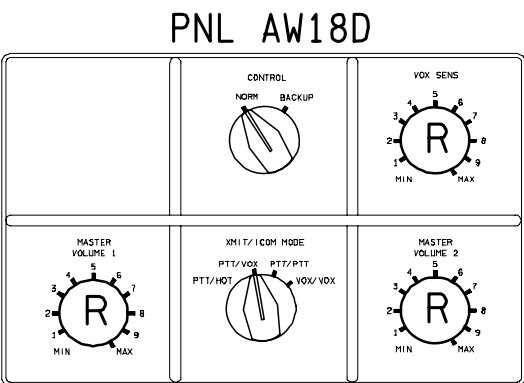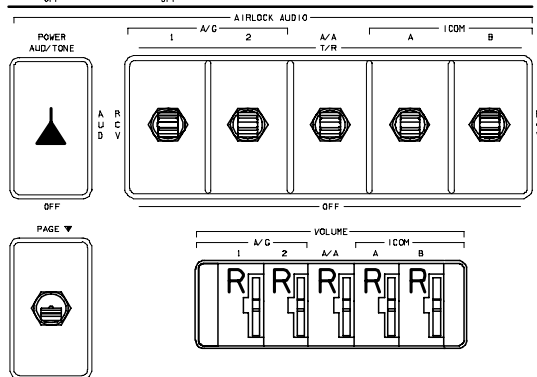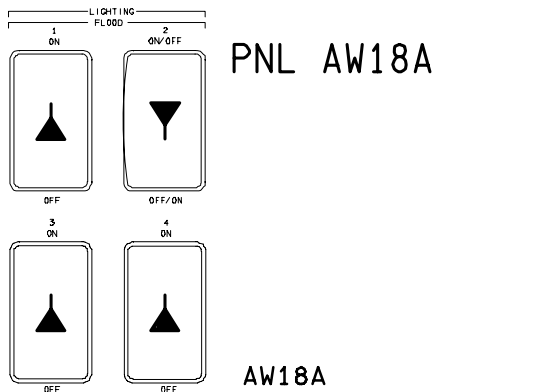


OV105

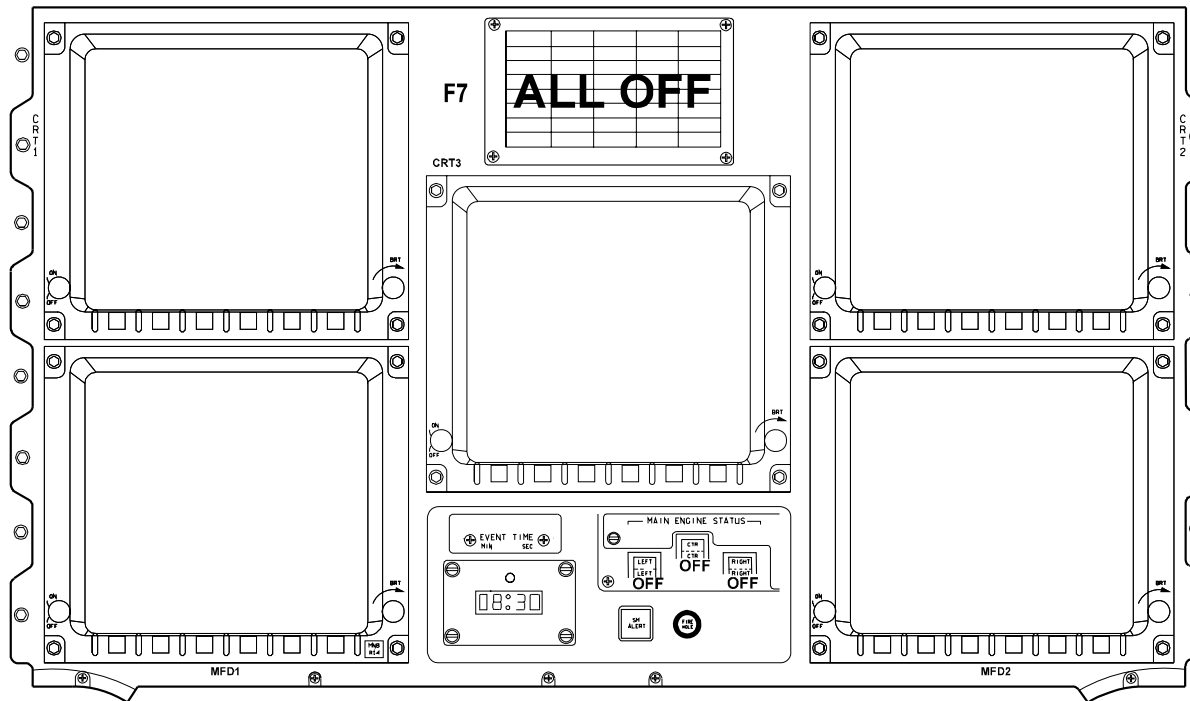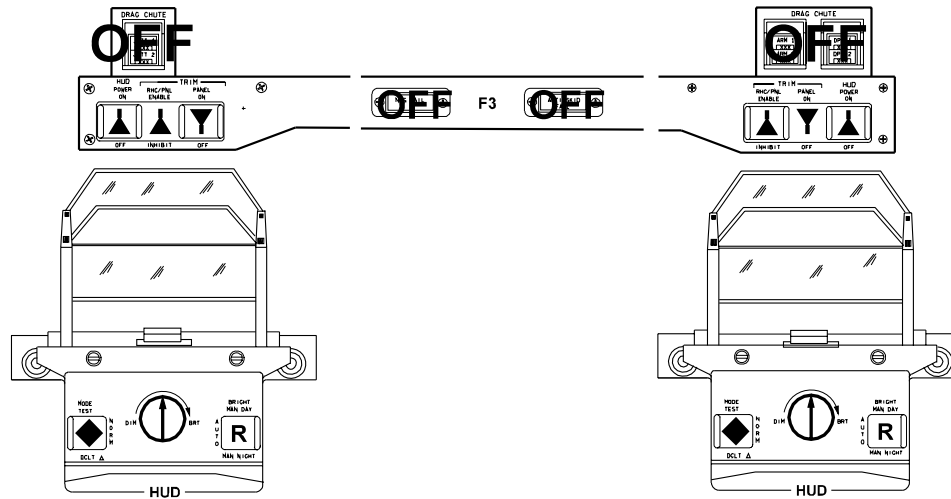


OV105

OV105

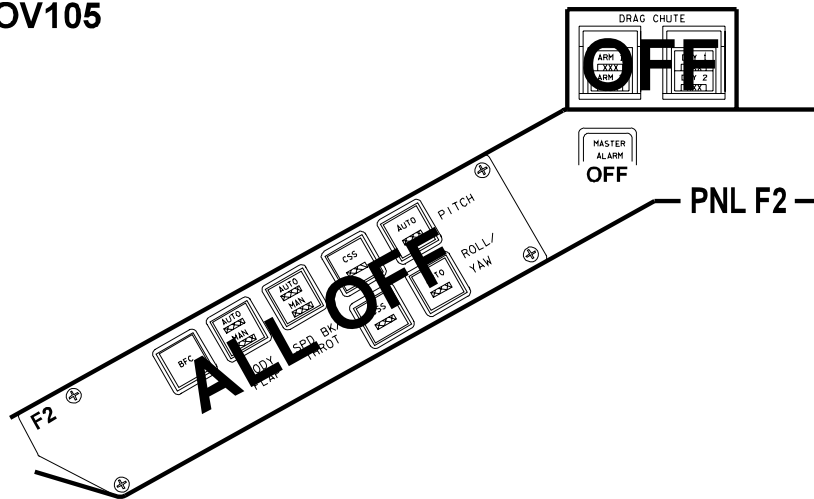


PNL 013

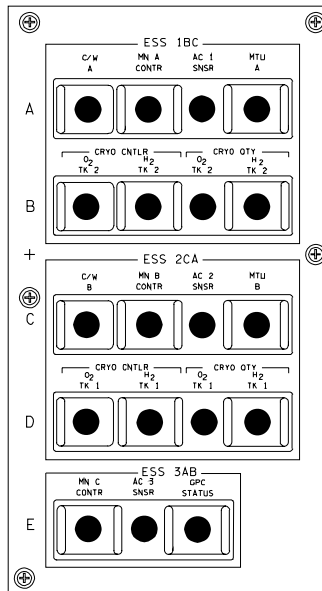




L side OVHD flood - R (MID)

PNL 07

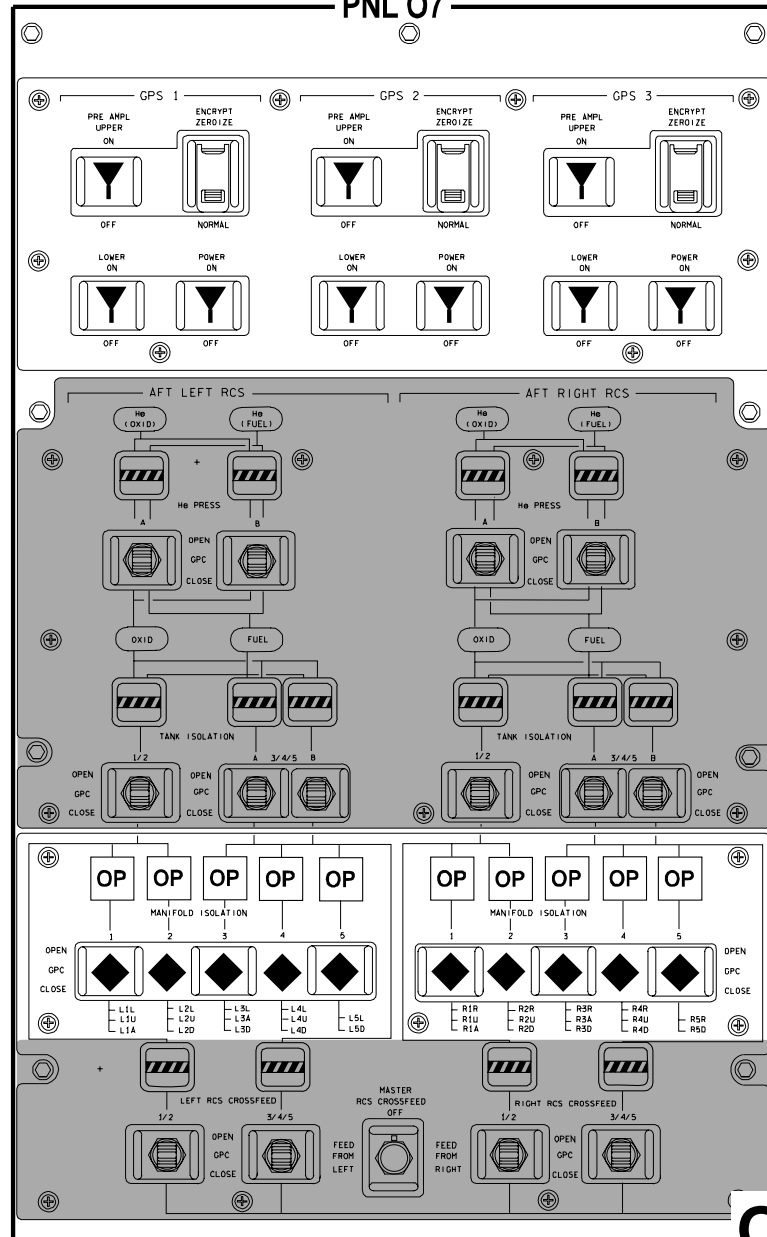

OV105


OV105

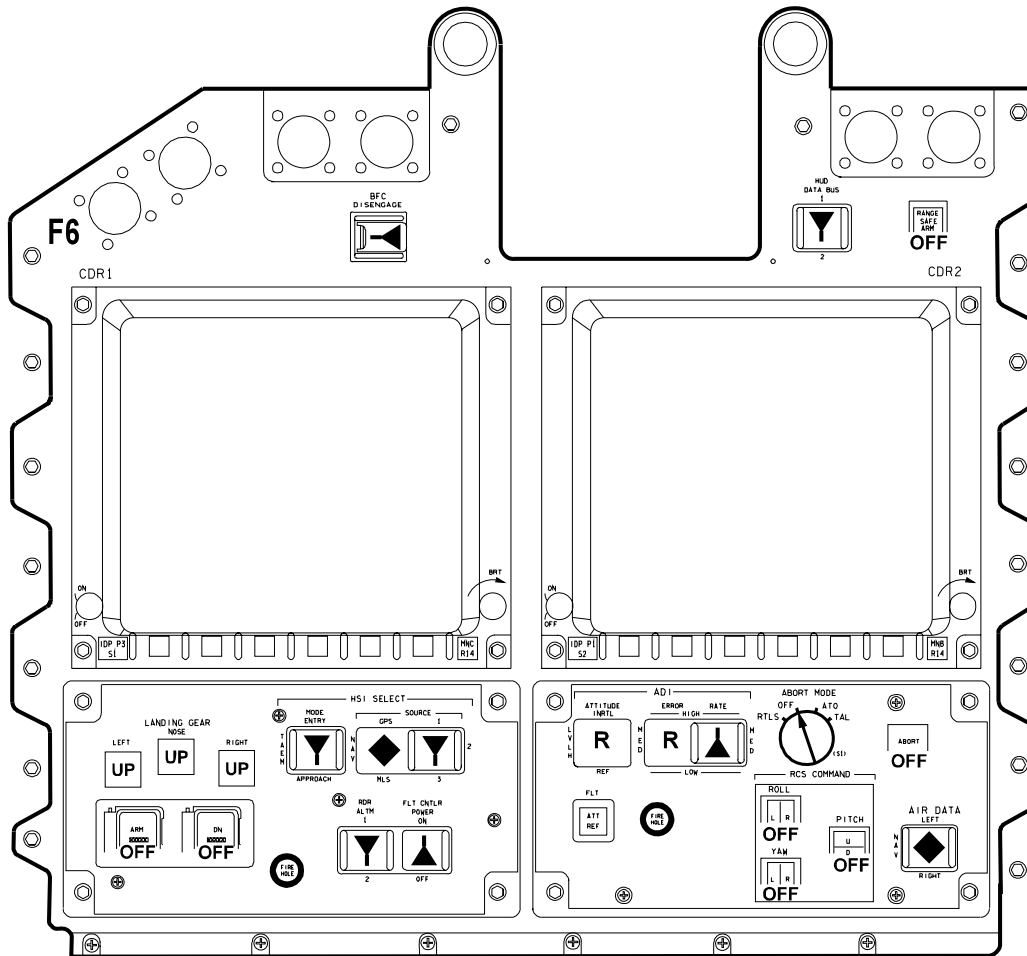





OV105

PNL O8

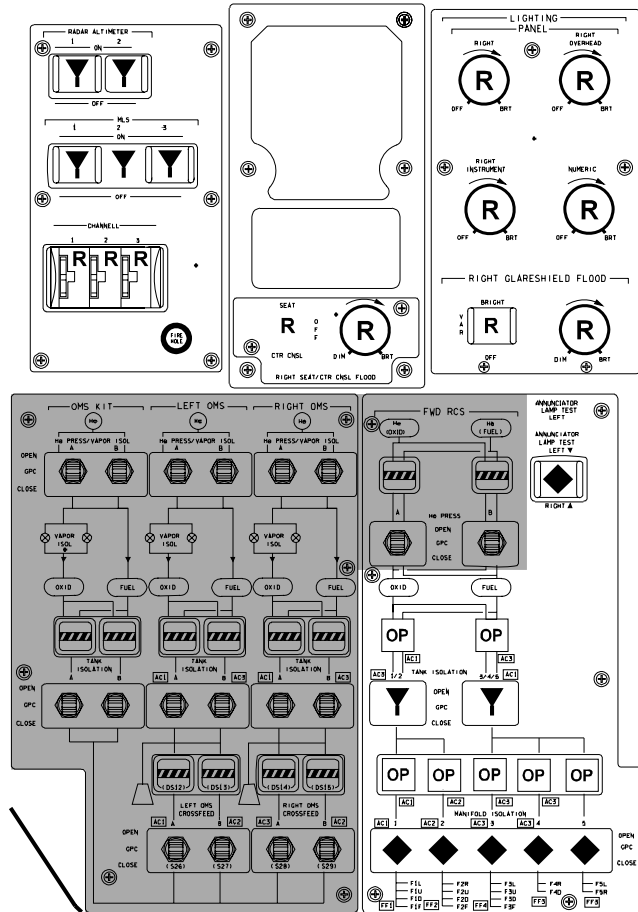

R side OVHD flood - R (MID)

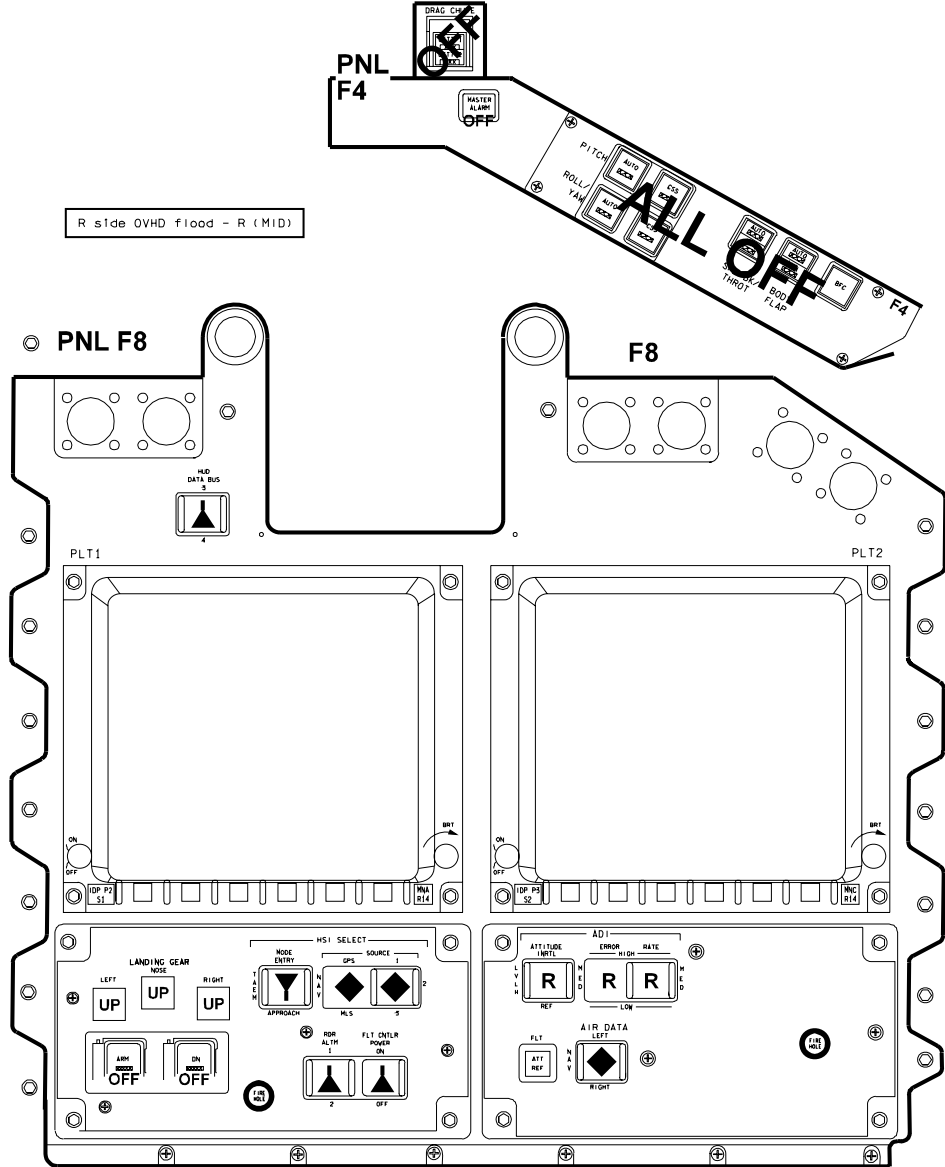

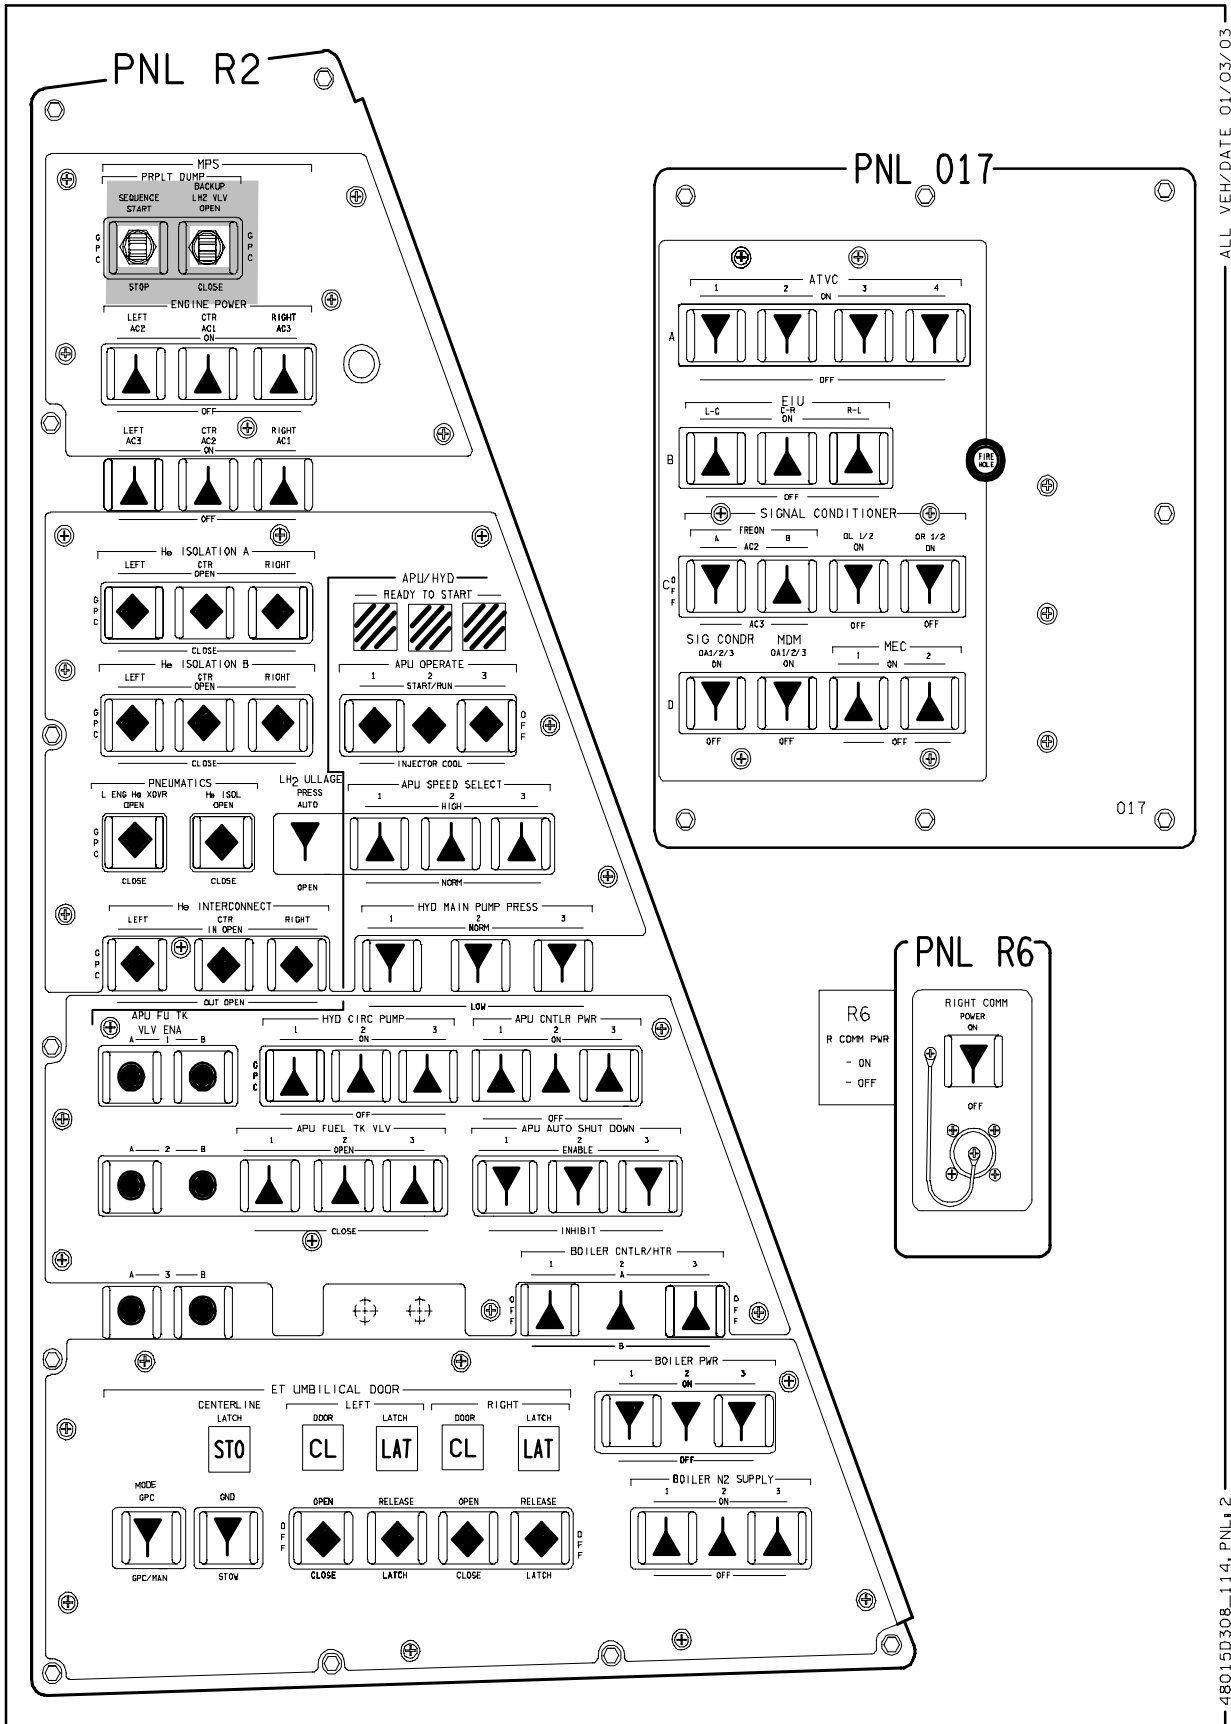

ALL VEH/DATE 01/03/03




48015D308\_114, PNL 2

**OV105**

(OV105) C3-8



D/O/ALL/GEN Q

OV105

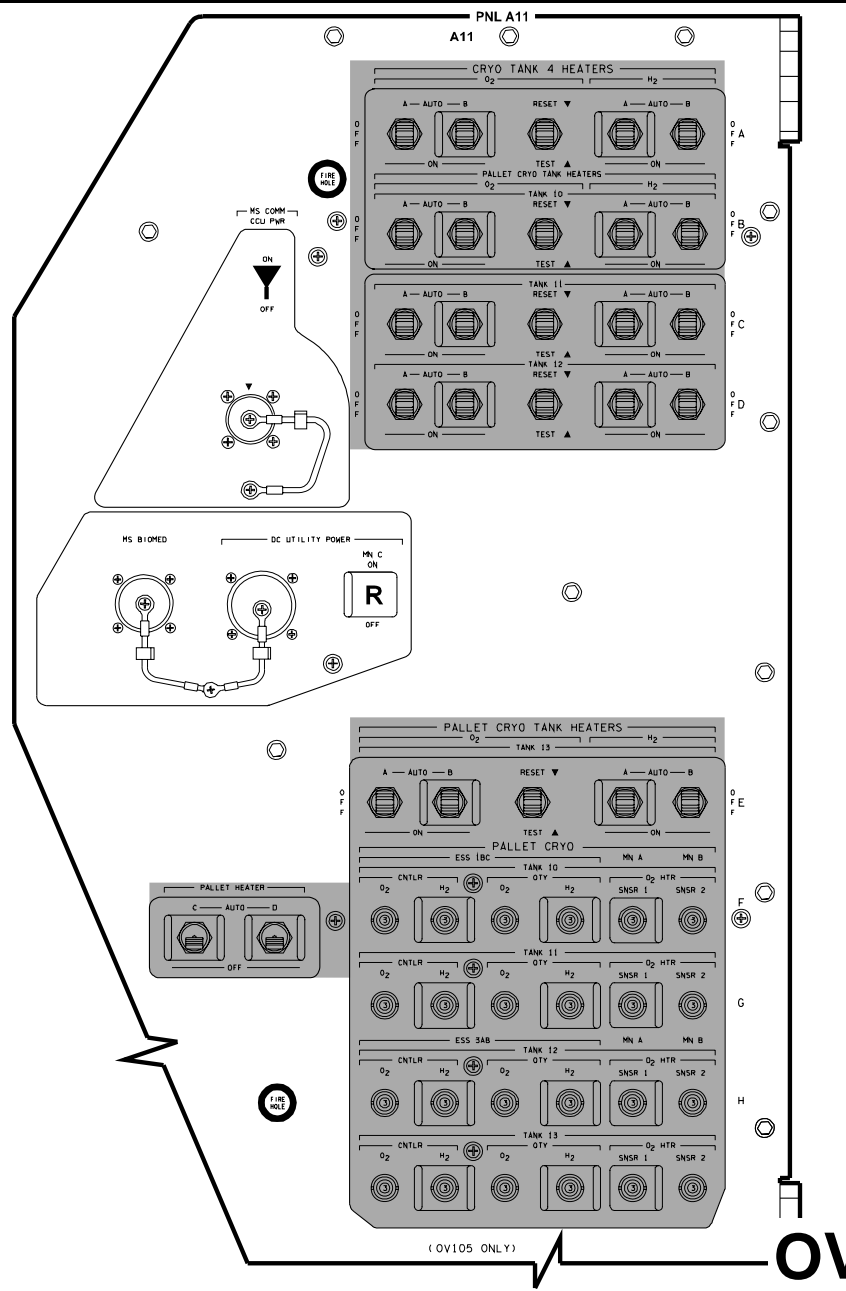


OV105

PNL MO58F

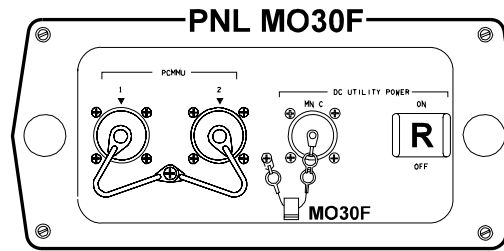


**AIRLOCK HATCH**

ACTUATOR HANDLE - LATCHED  
 LOCK LEVER - LOCKED  
 EQUALIZATION VLV (TWO) - NORM  
 -CAPS INSTALLED




PNL MD24K




PNL MD44F

CAB TEMP CNTL ACT LINKAGE - SECONDARY ACTUATOR

— PNL MO39M —




PNL MO52J

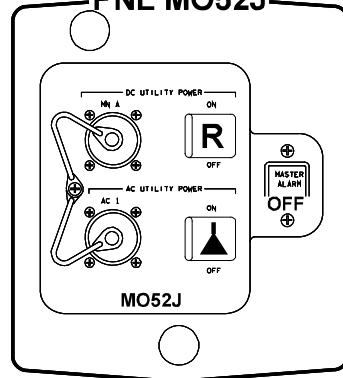

NOTE: NOT VISIBLE IF MAR FLOWN


PNL ML85E

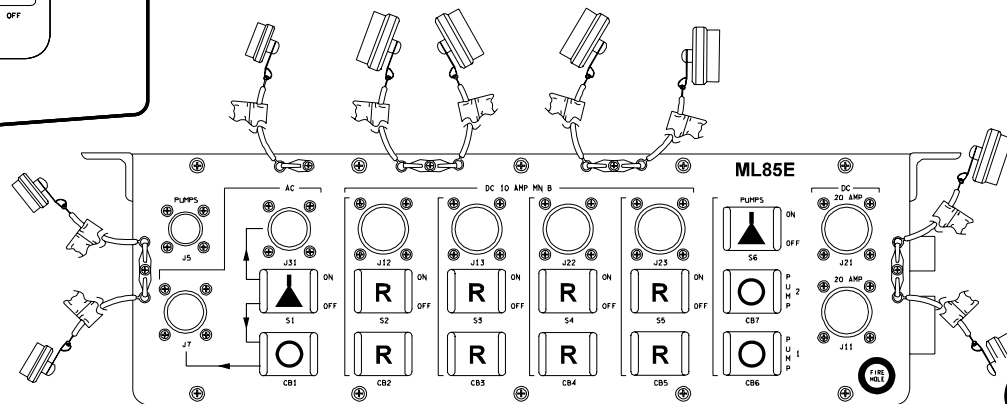

OV105

OV105





PNL ML86B

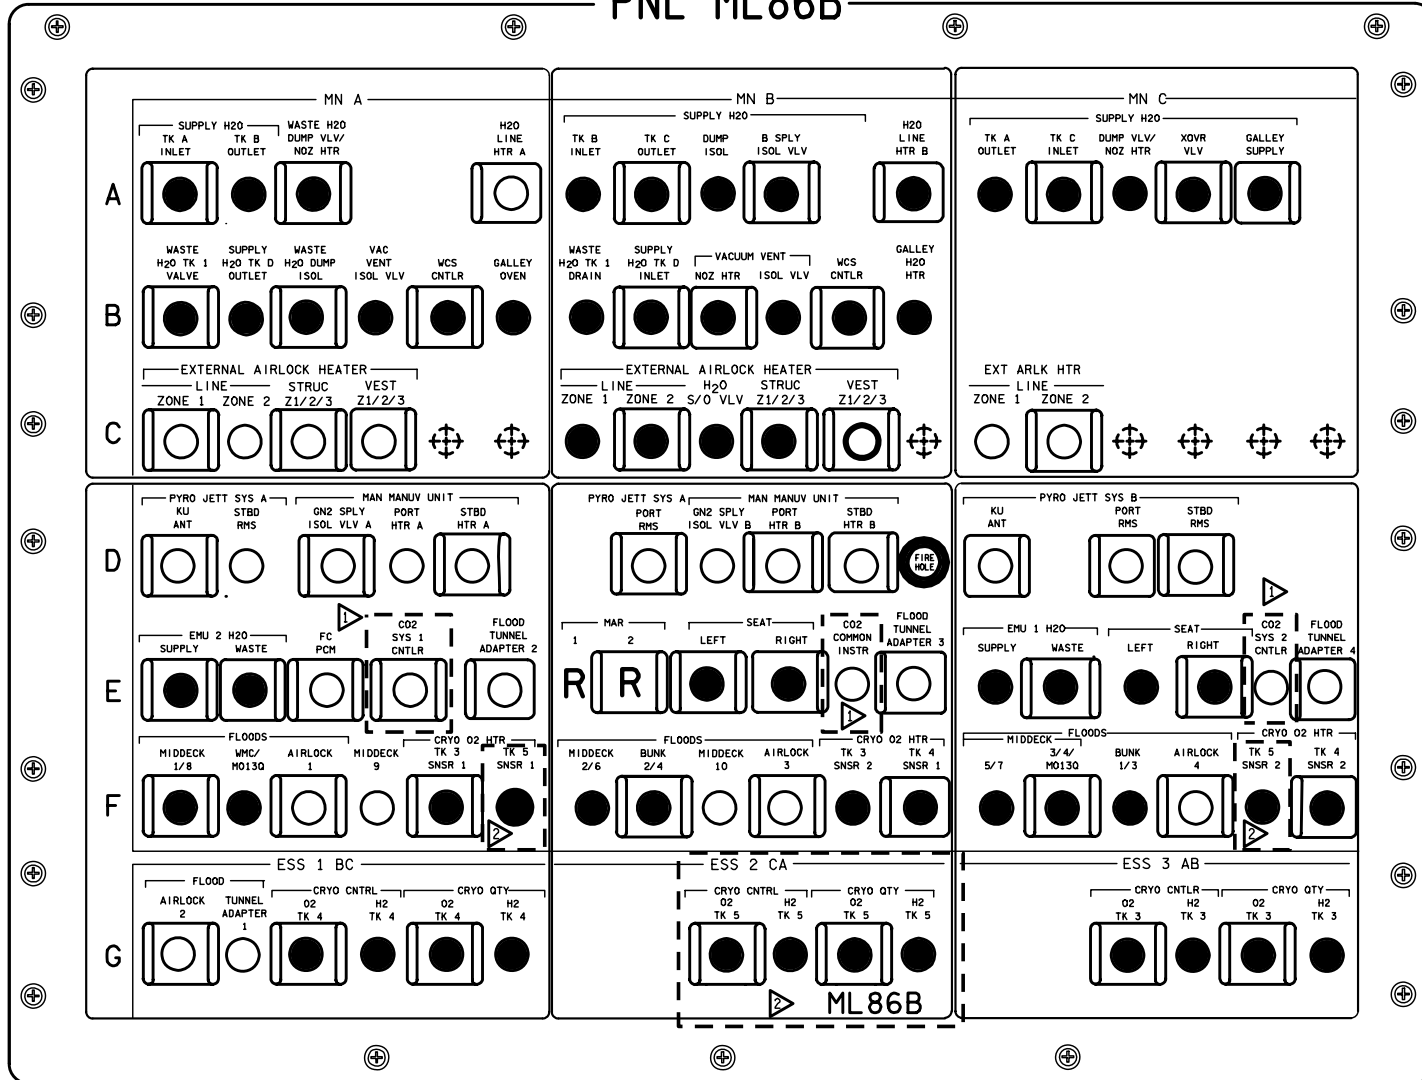

NOTES: ▷ CLOSED IF CO2 RML SYS FLOWN


▷ OPEN IF TK 5 NOT FLOWN

OV105

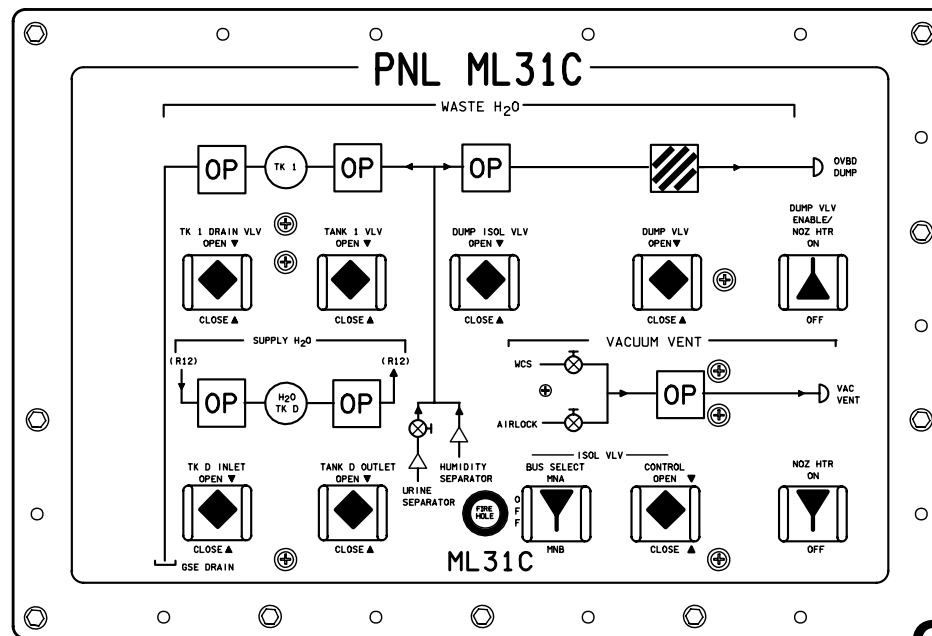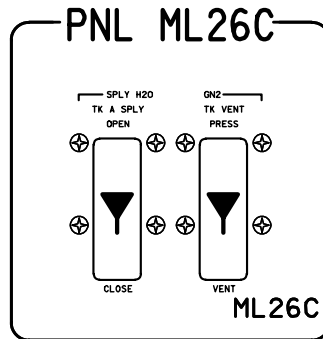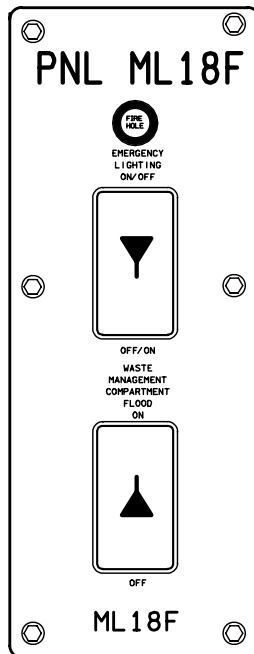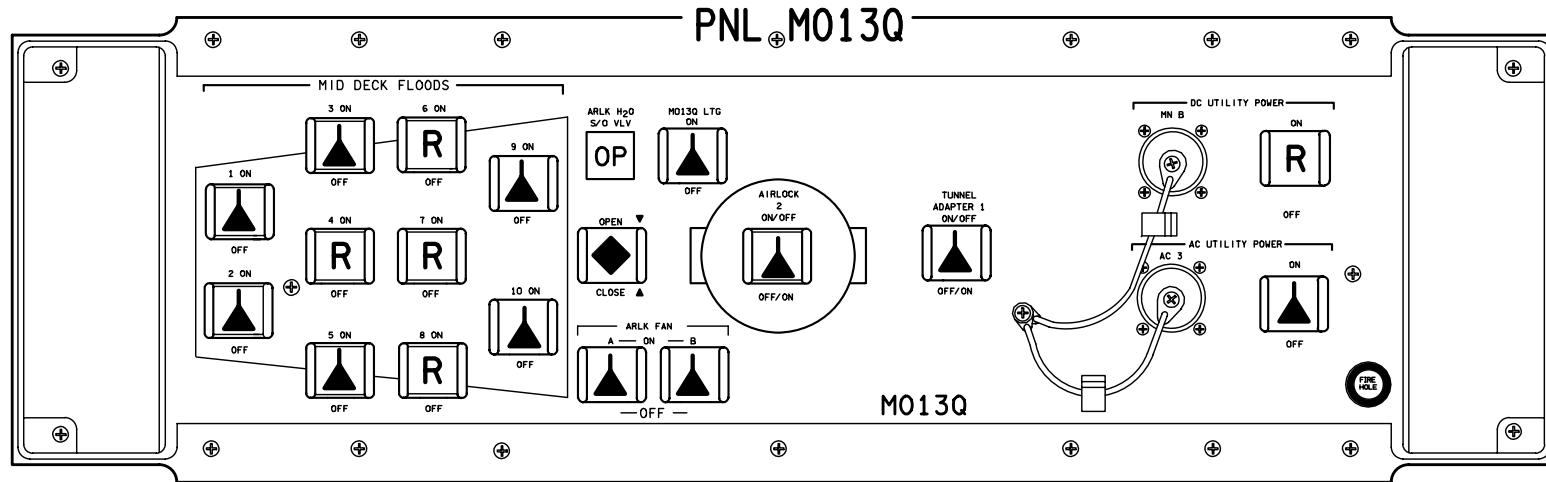

OV105

PNL L4

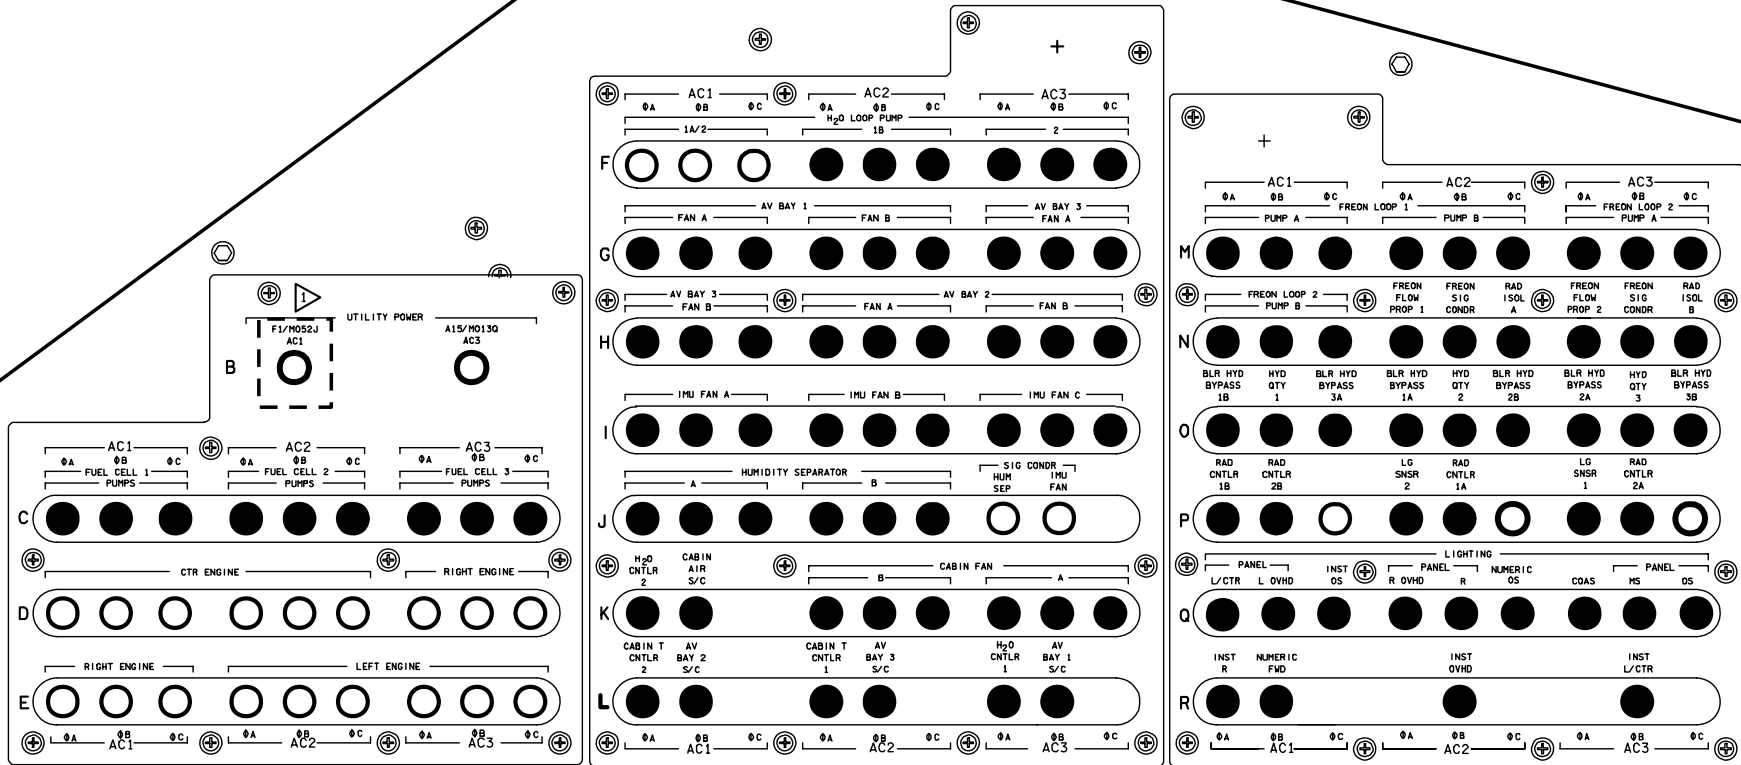


NOTE: CB CAN REMAIN CLOSED FOR AC PGSC USAGE. OPEN WHEN PGSC UNPOWERED/STOWED

48015D313\_114. PNL 3

OV105/DATE 11/23/04

(OV105) C3-13






**OV105**  
D/O/5/GEN Q

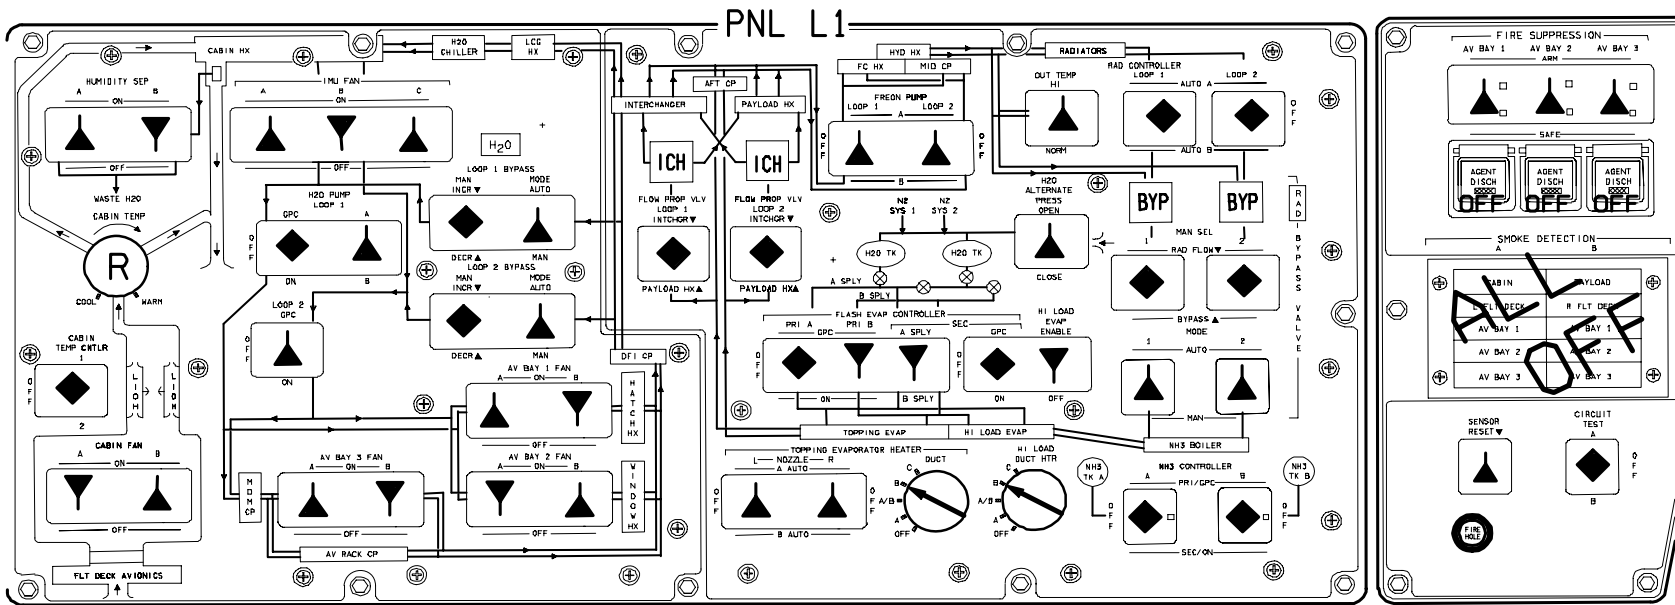



OV105

PNL L2

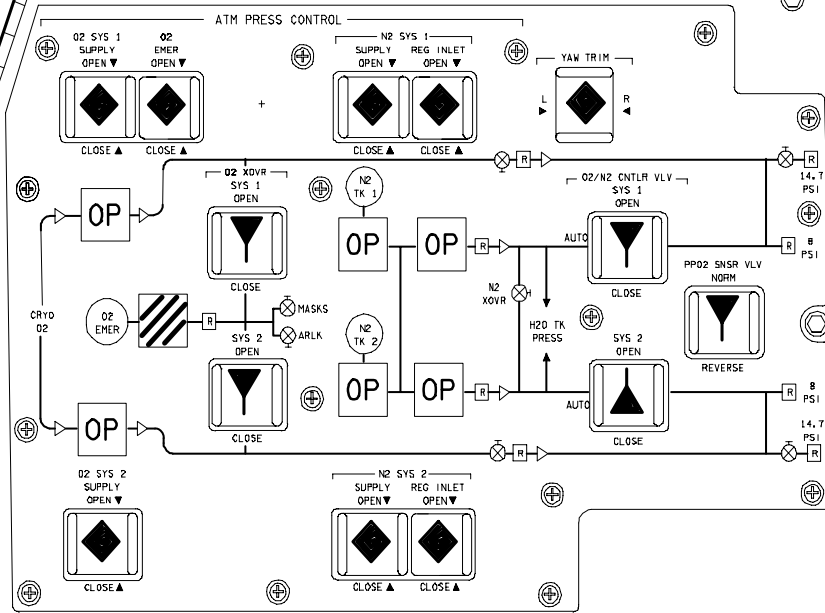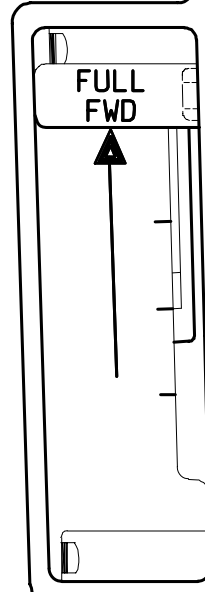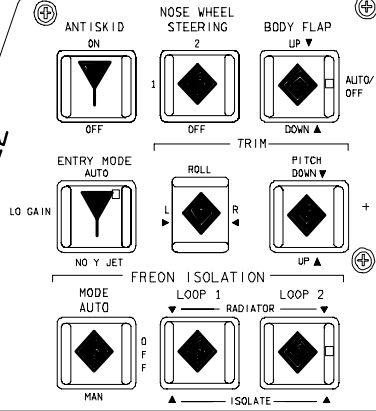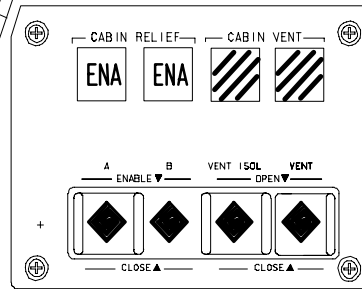

OV105/DATE 12/10/02



48015D315\_114\_PNL 9 1

OV105



(OV105) C3-15


D/O/5/GEN Q



PNL C2/C3

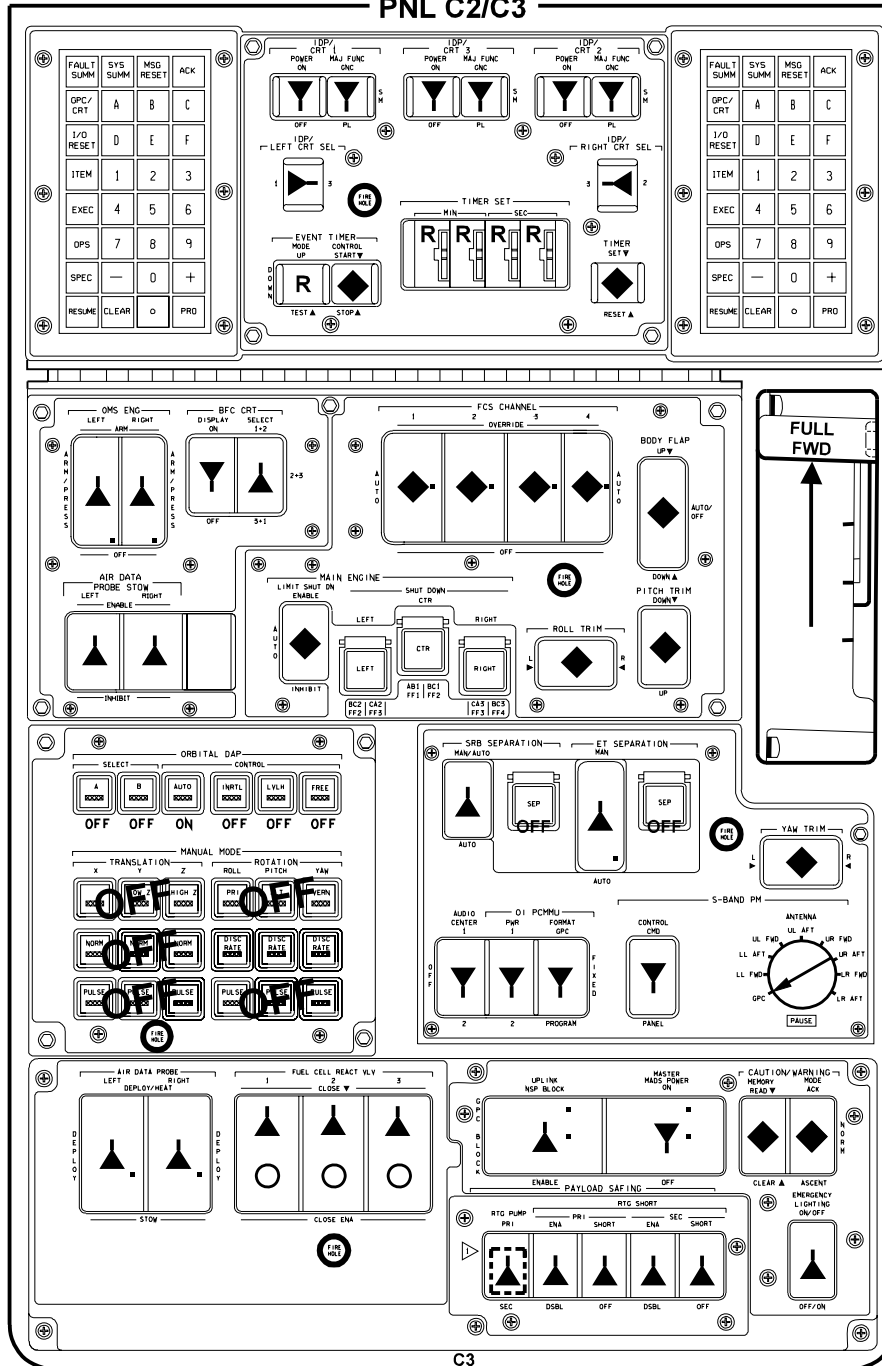




OV105

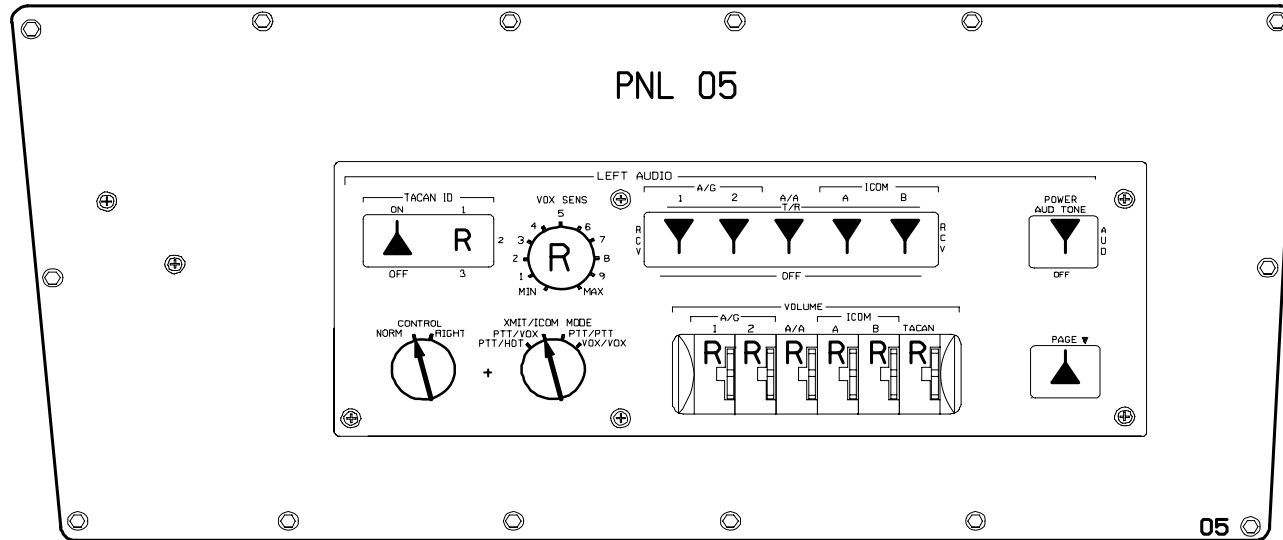
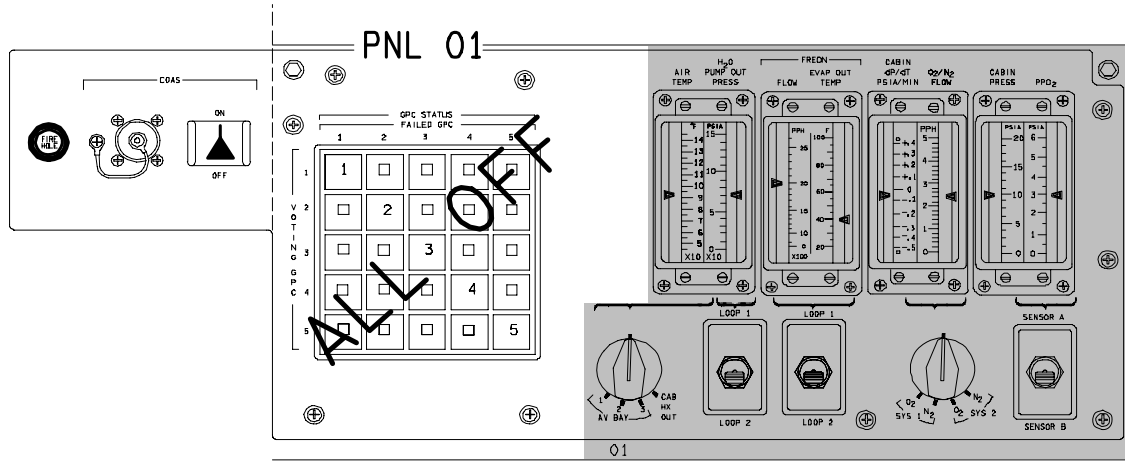


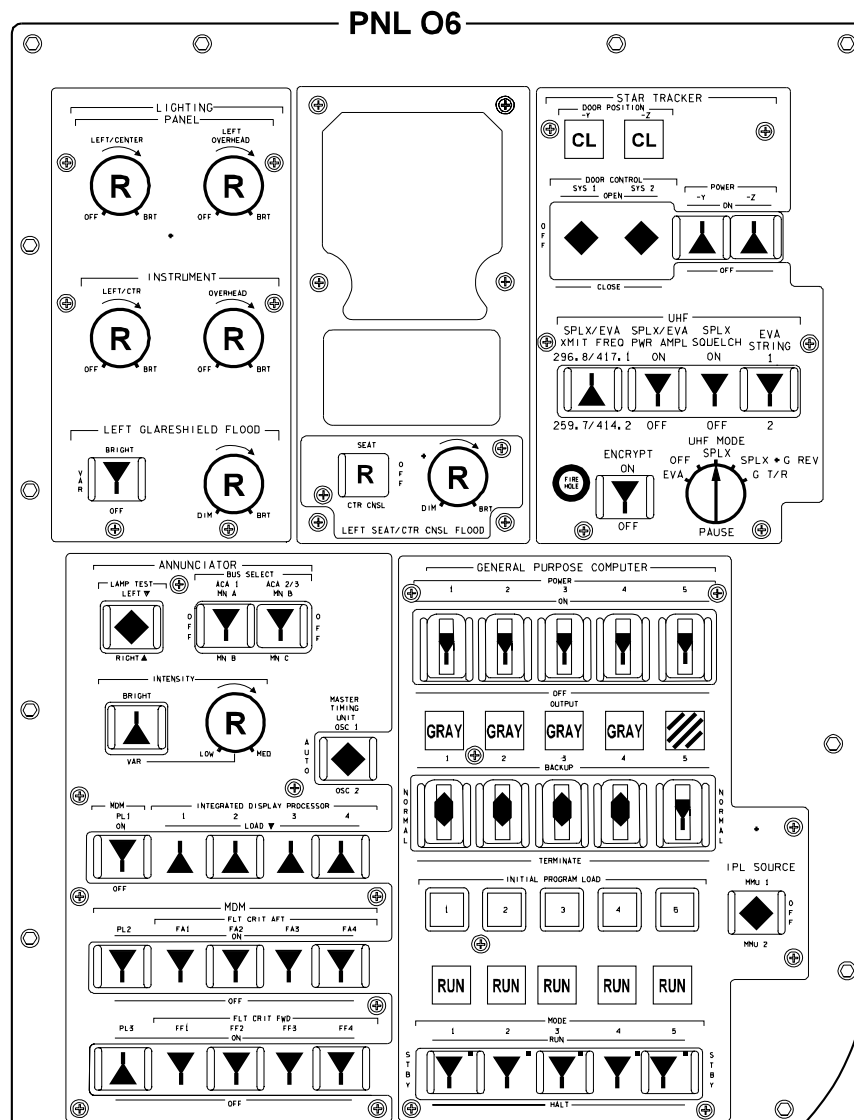

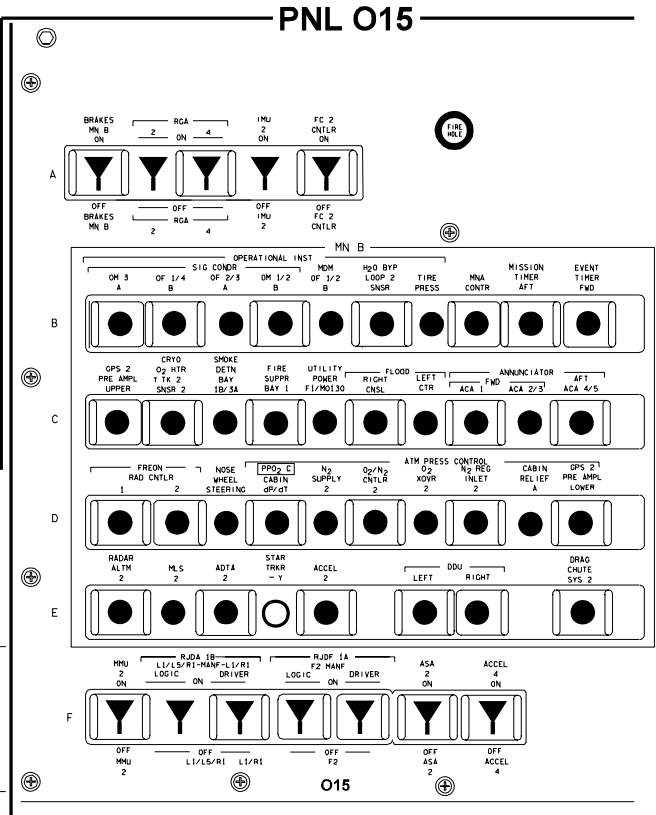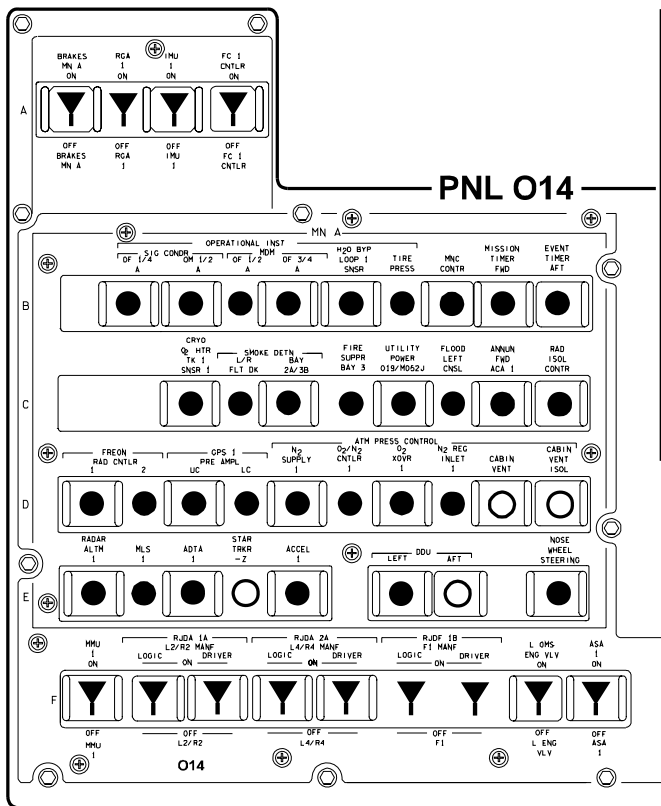


# OV105

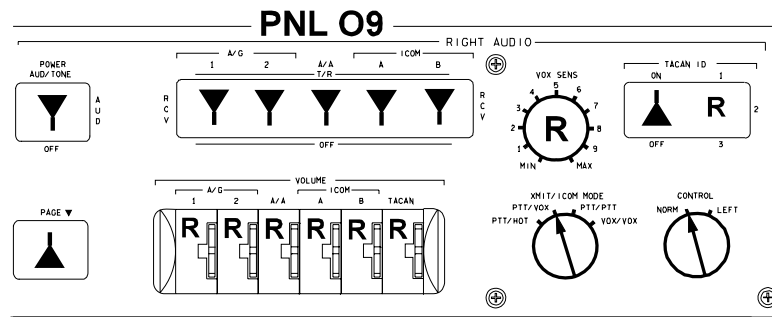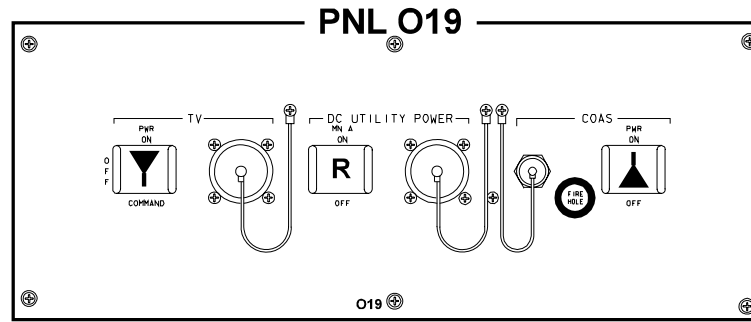
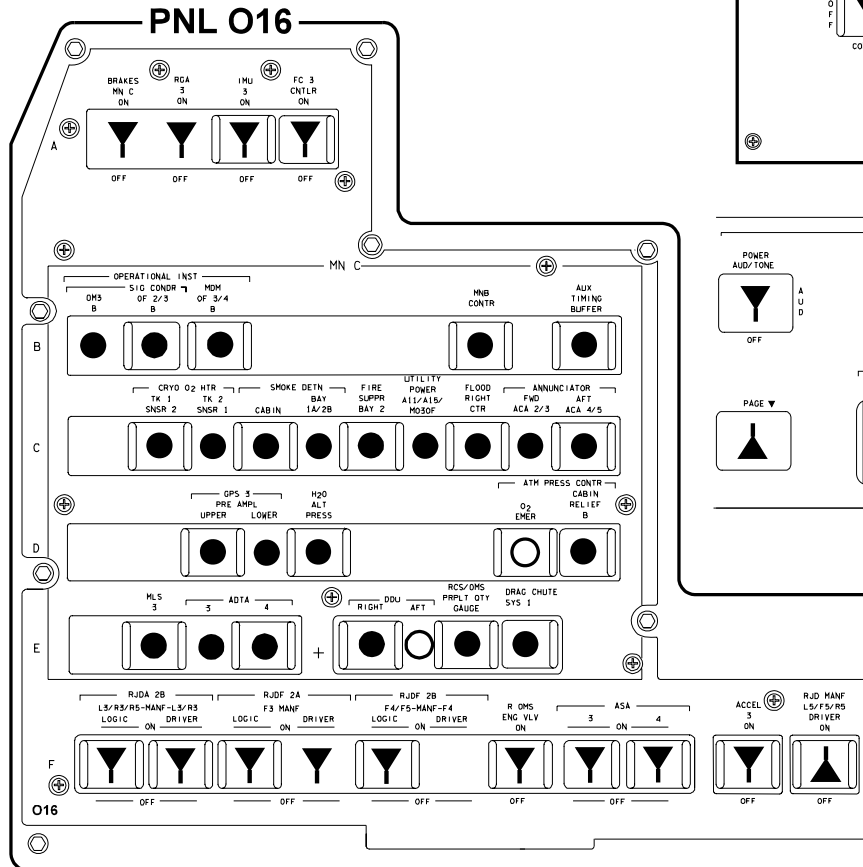


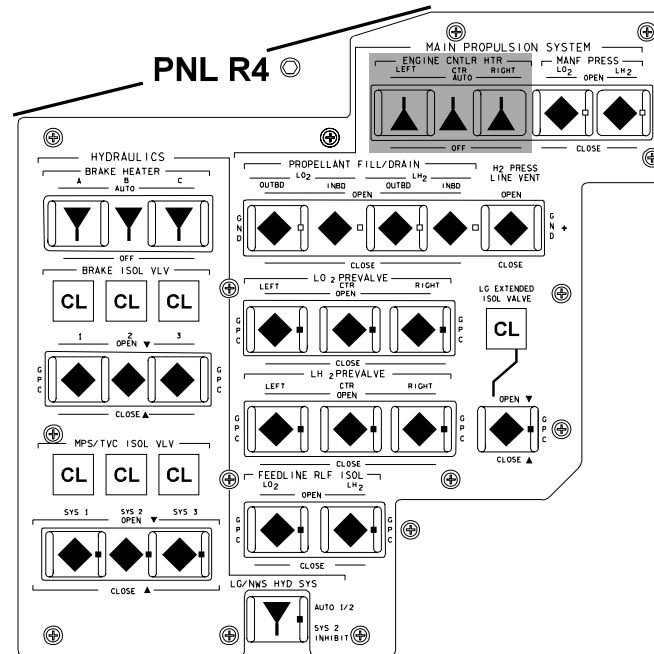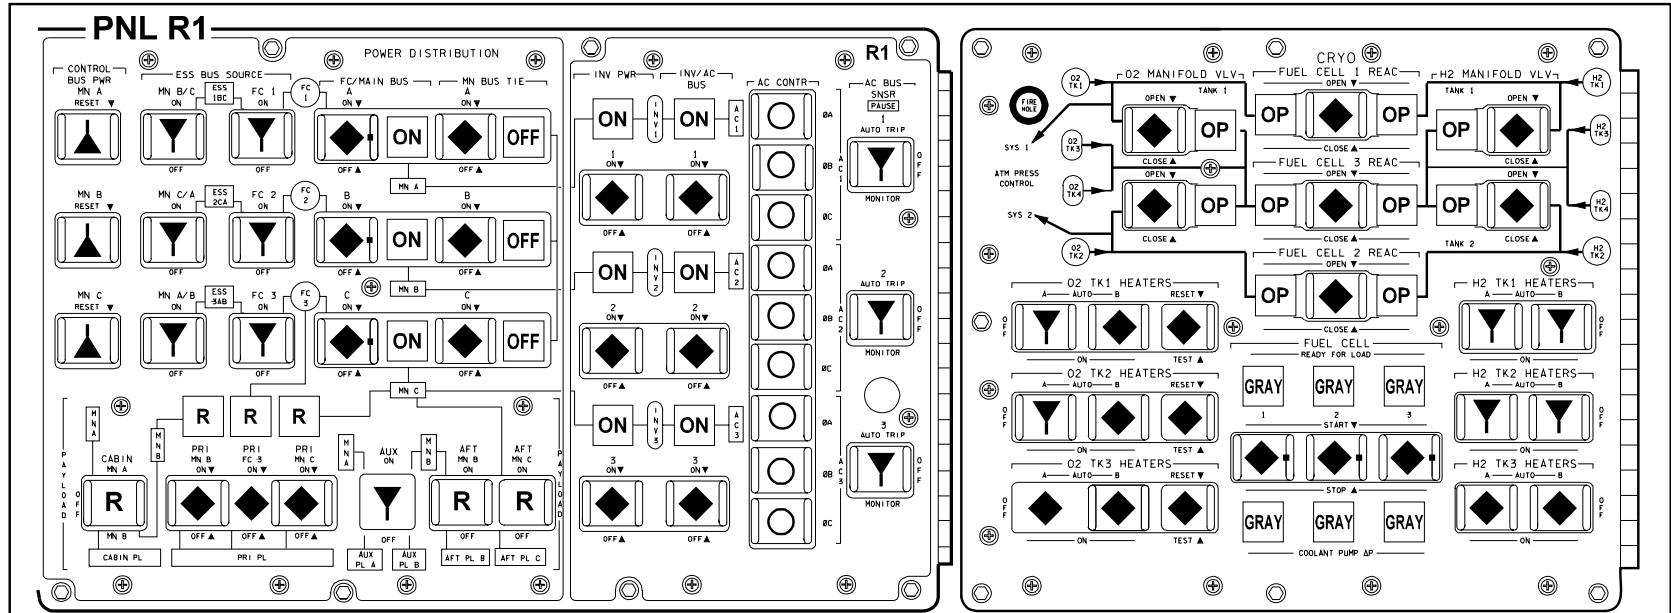



# OV105

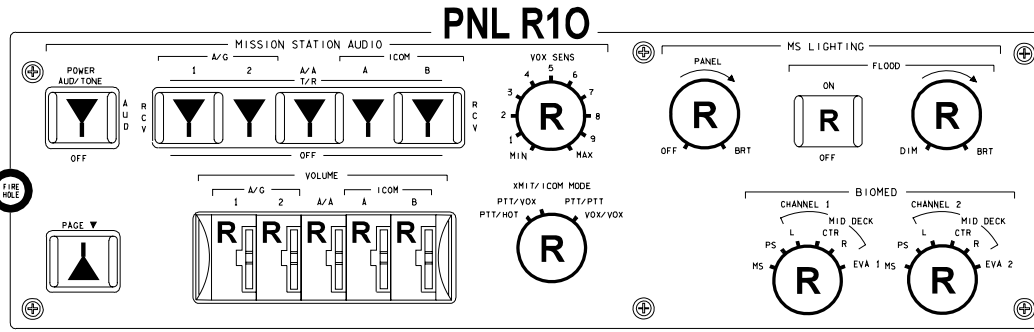


ACTIVATION  
 R10 MS AUD PWR - AUD/TONE  
 All other sws - as reqd  
 R12 MS AUD CONTL - NORM  
 A11 MS COMM CCU PWR - ON

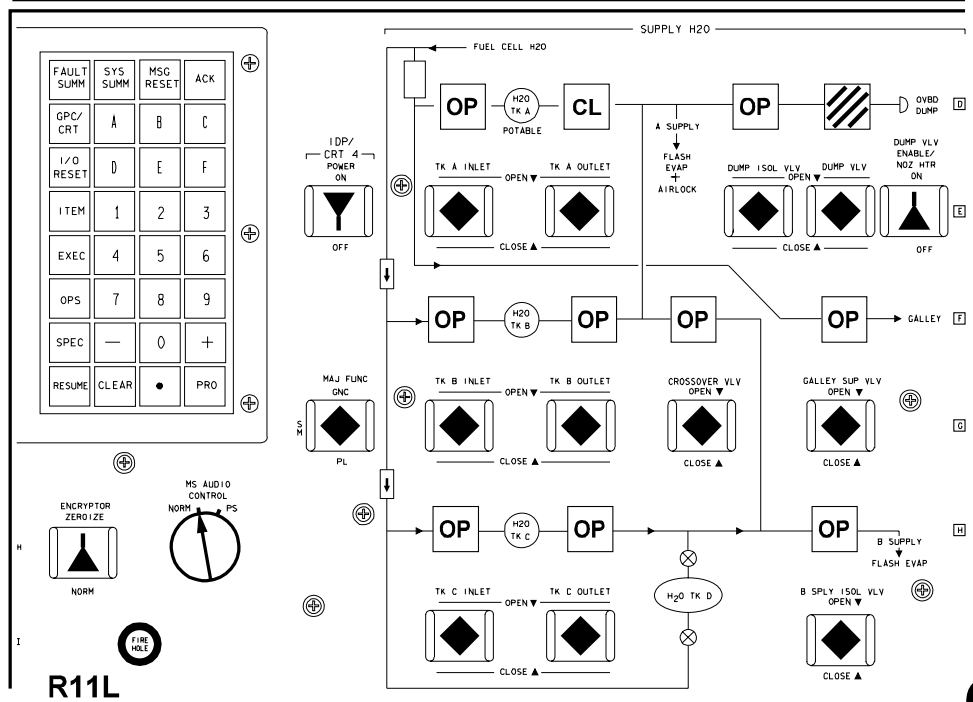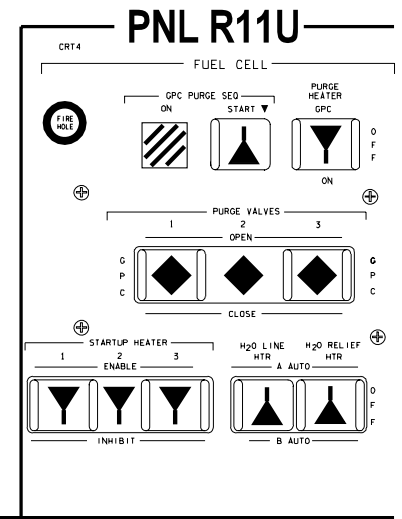






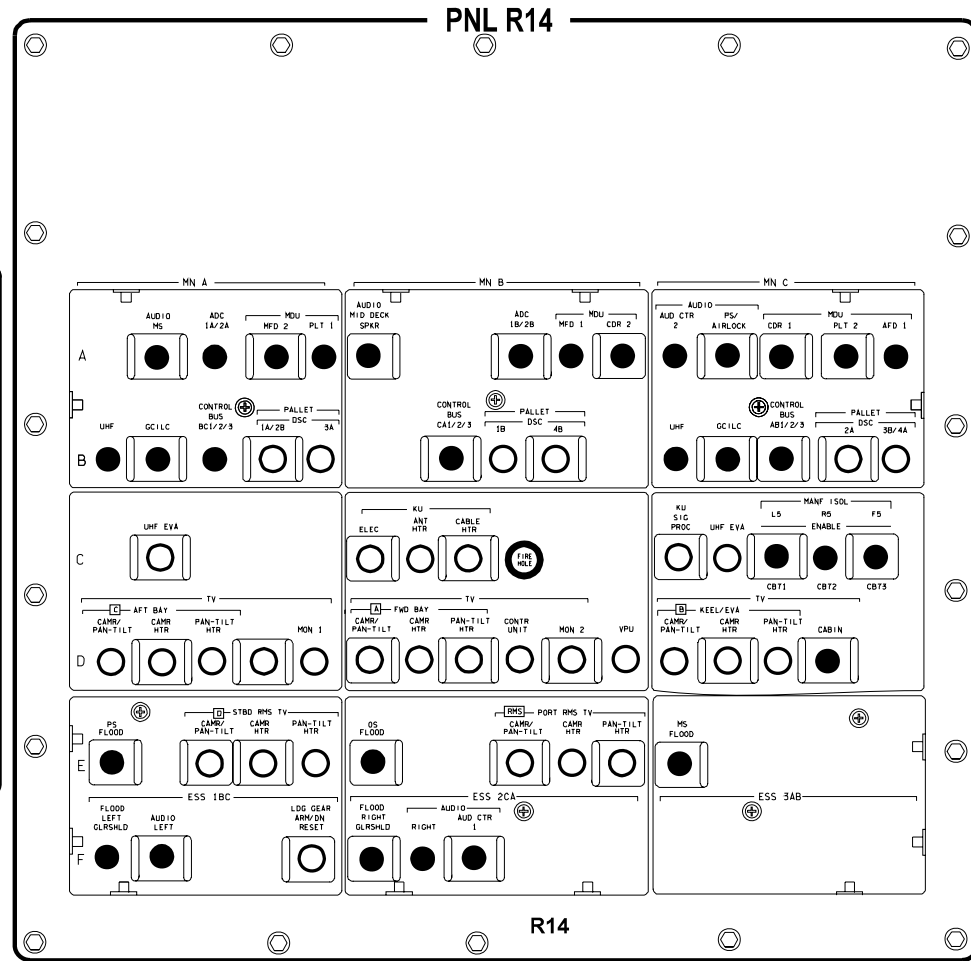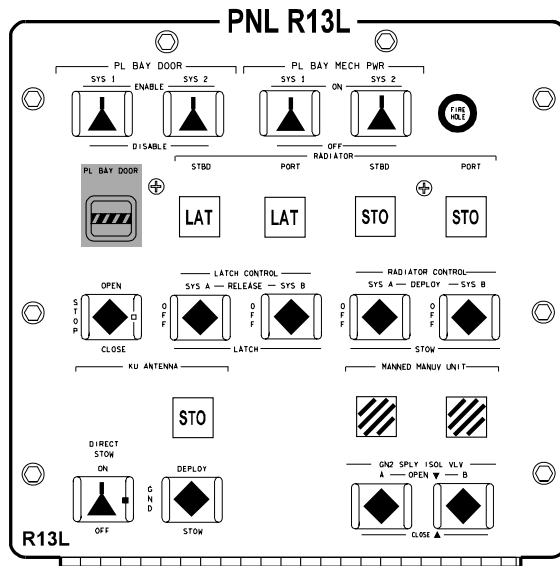

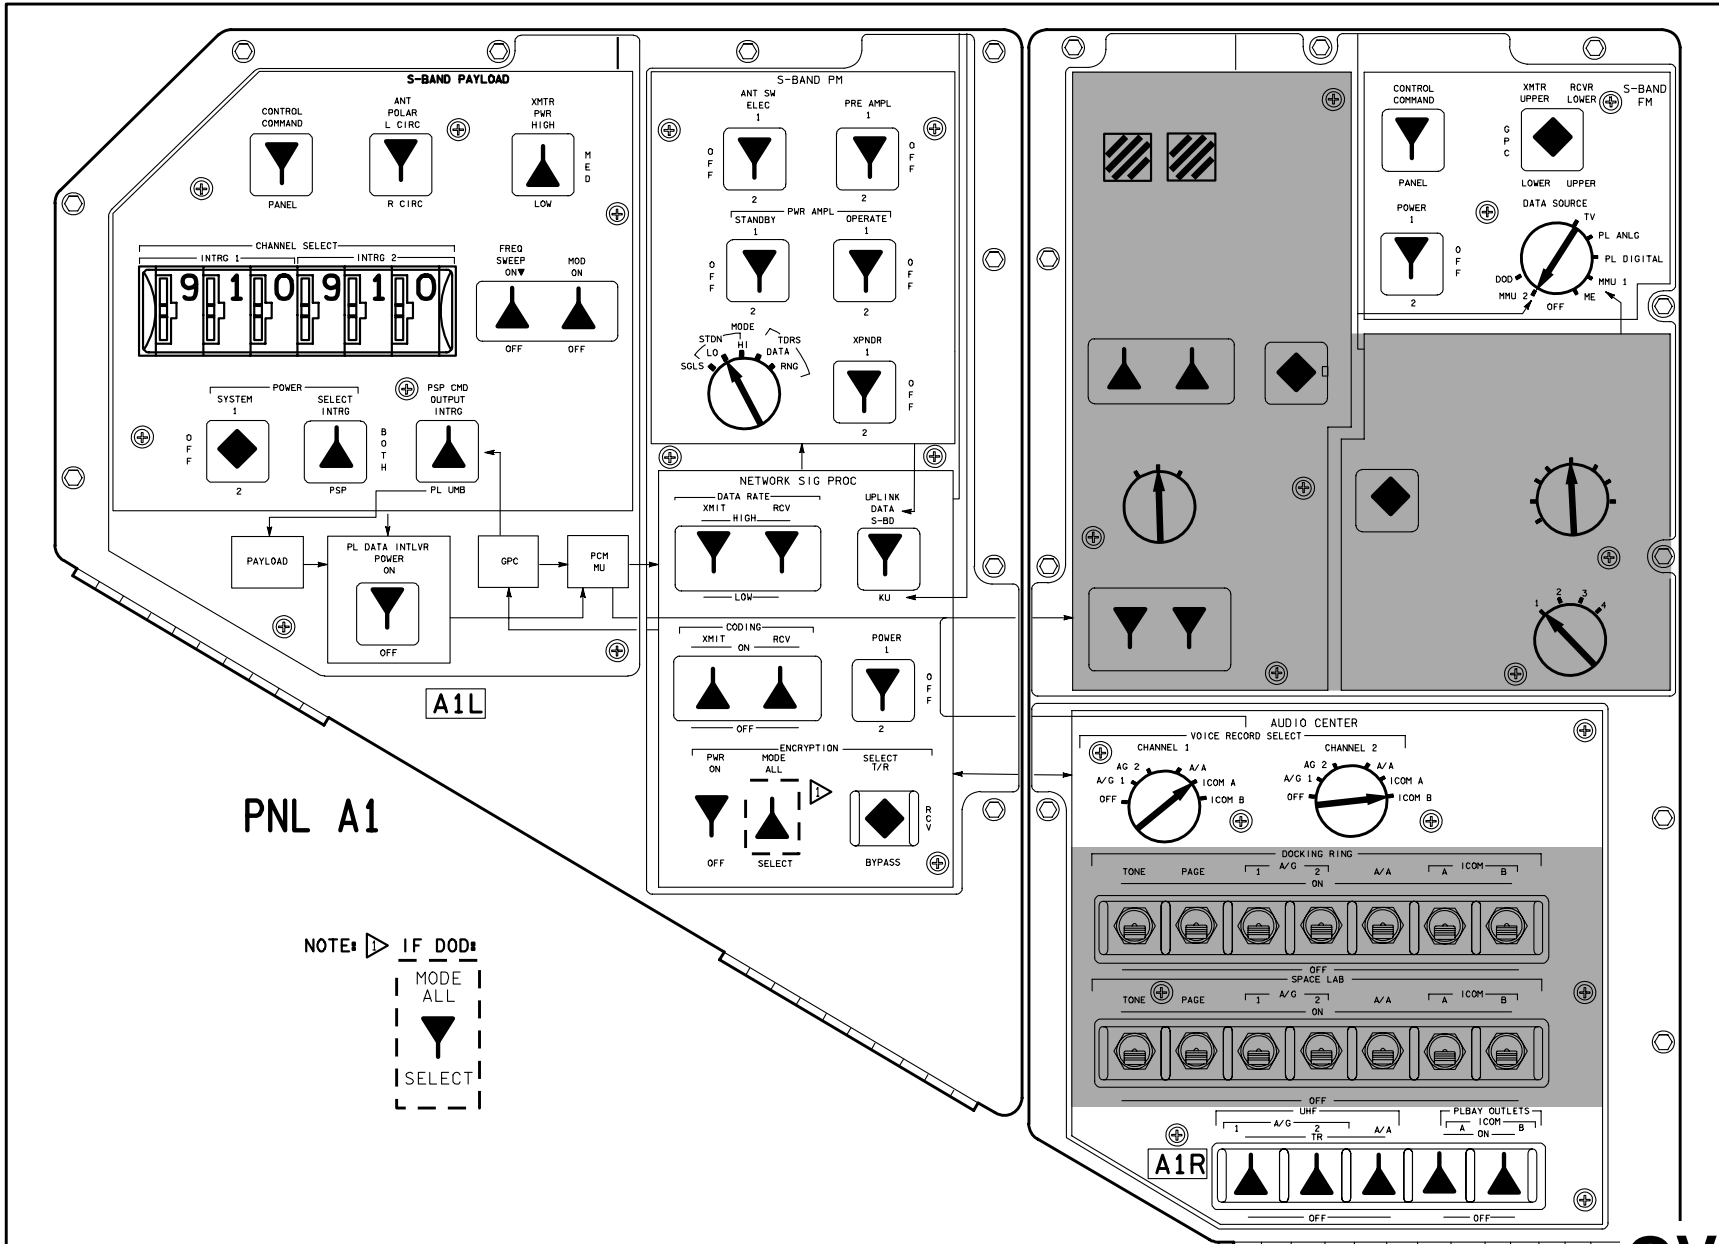


PNL A1

NOTE: IF DOD:  
 MODE ALL  
 SELECT

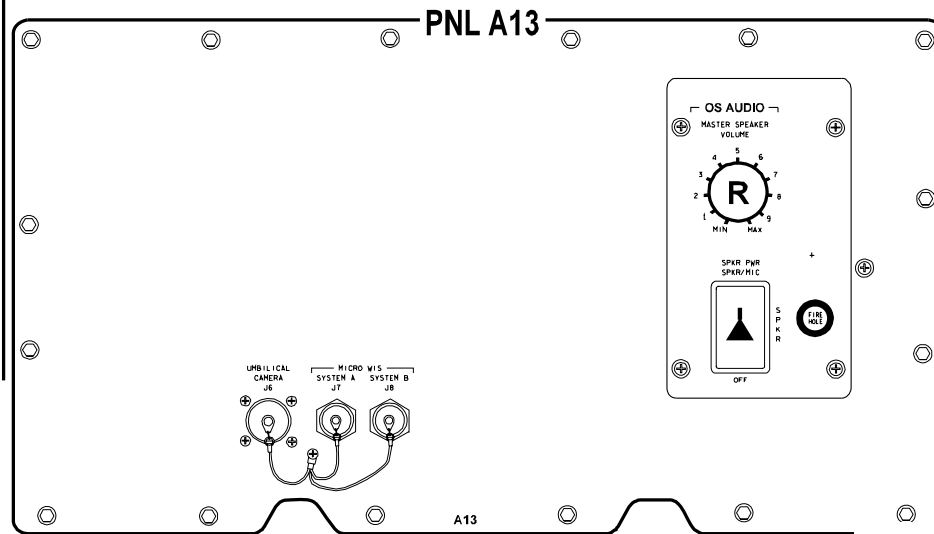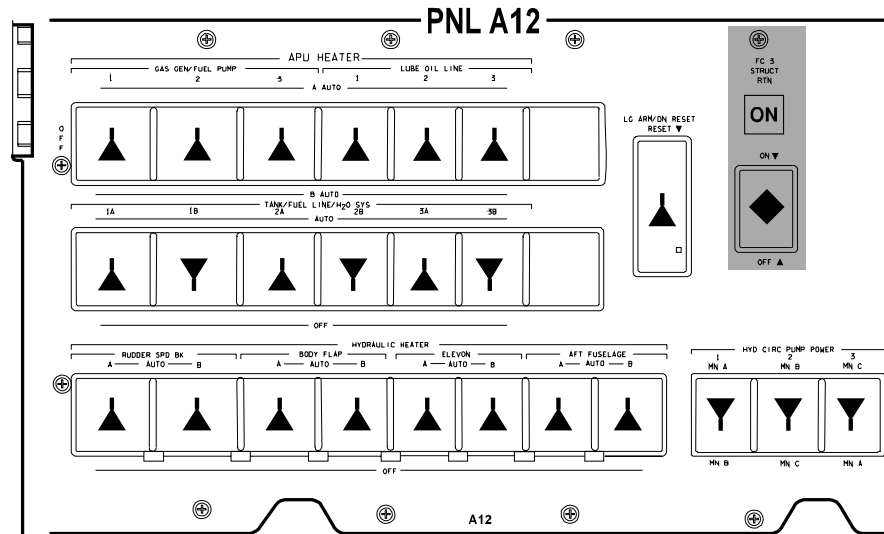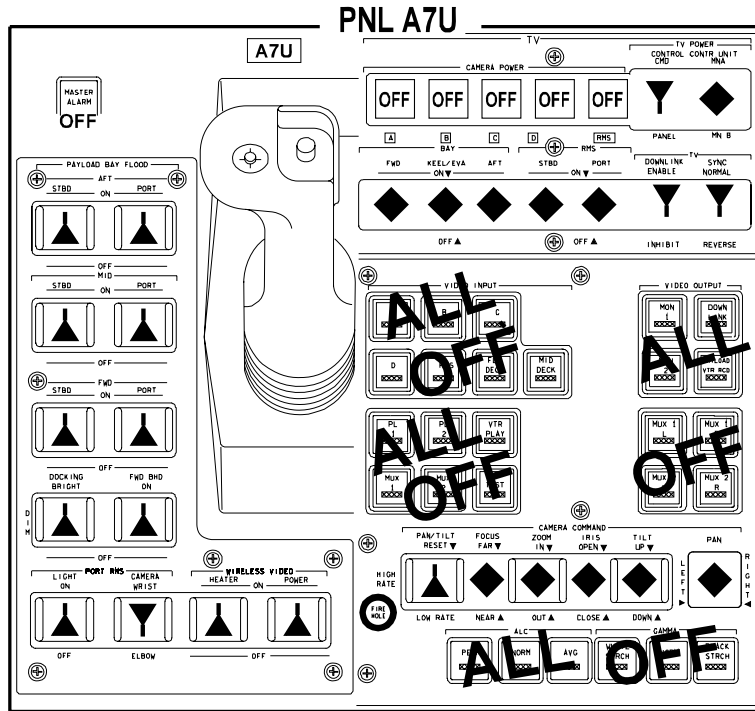

OV105



PNL L9

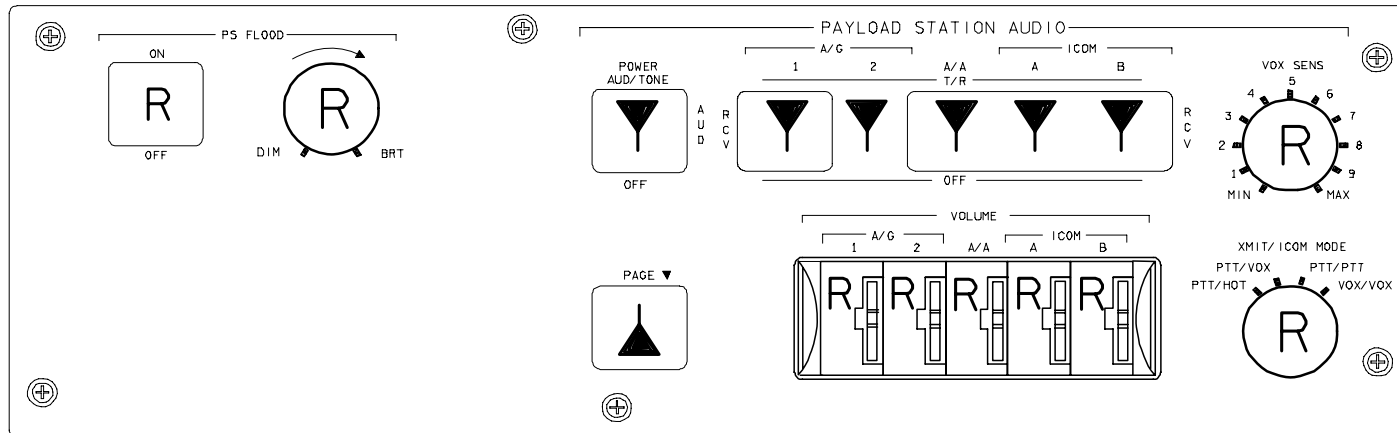

L9

OV105

PNL A6L

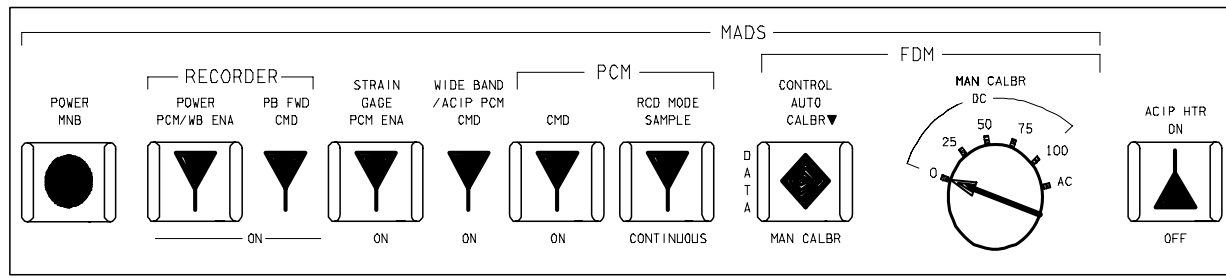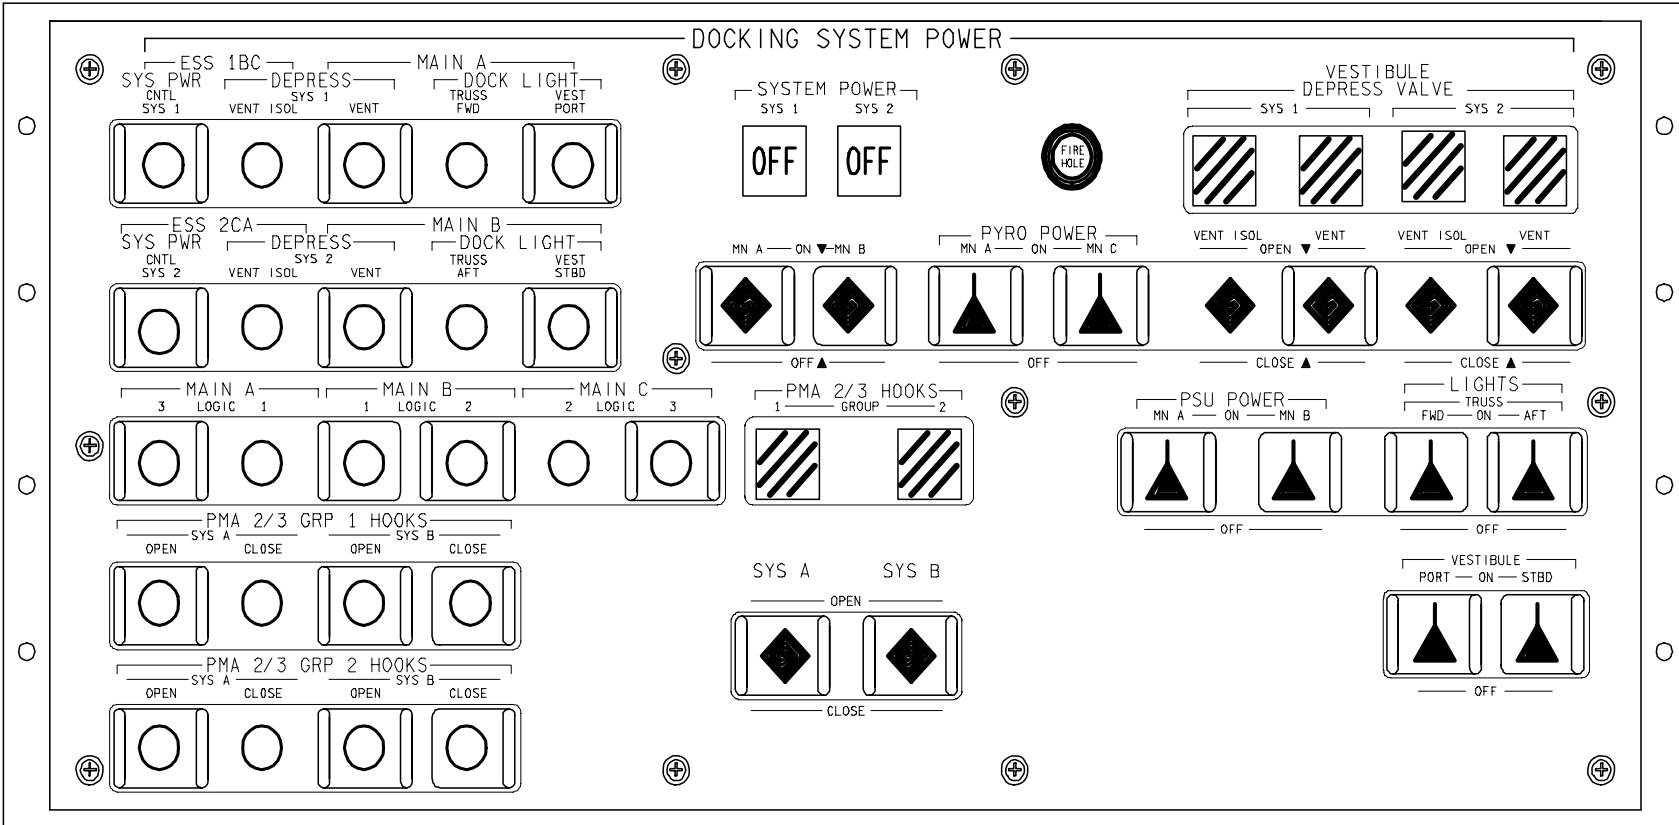

OV105

OV105

**CONTROL PANEL POWER**

A ON OFF      B ON OFF      C ON OFF

**HEATERS/DCU POWER**

H1 ON OFF      H2/DCU ON OFF      H3/DCU ON OFF

**APDS POWER**

A<sub>D</sub>S ON OFF      B<sub>D</sub>S ON OFF      C<sub>D</sub>S ON OFF

**STATUS**

POWER	ON	INITIAL	CONTACT
APDS PROTECT	CIRCUIT OFF	CAPTURE	CAPTURE
RING	ALIGNED	RING	FORWARD POSITION
RING	INITIAL POSITION	TO HOOK	
FIXERS	OFF	INTER	SEALED
HOOKS 1	OPEN	HOOKS 1	CLOSED
HOOKS 2	OPEN	HOOKS 2	CLOSED
LATCHES	CLOSED	LATCHES	OPEN
UNDOCK	COMPLET	RING	FINAL POSITION

**PYROS**

A<sub>p</sub> ON OFF      B<sub>p</sub> ON OFF      C<sub>p</sub> ON OFF

A<sub>p</sub> OFF      C<sub>p</sub> OFF

**FIRE HOLE**

PYRO CIRC PROT OFF

**PYRO COMMANDS**

PYRO CIRC PROT OFF      PYRO CIRC PROT ON

ACT HOOKS FIRING      PAS HOOKS FIRING

**APDS CONTROL COMMANDS**

OPEN HOOKS      OPEN LATCHES

UNDOCKING

A<sub>D</sub>S OFF      C<sub>D</sub>S OFF

LAMP TEST

PNL A7L

**APDS CONTROL COMMANDS**


POWER ON      POWER OFF      RING OUT      RING IN

APDS CIRC PROT OFF      CLOSE HOOKS      CLOSE LATCHES      FIXER OFF





APDS CONTROL PANEL

**OV105**

# OV105

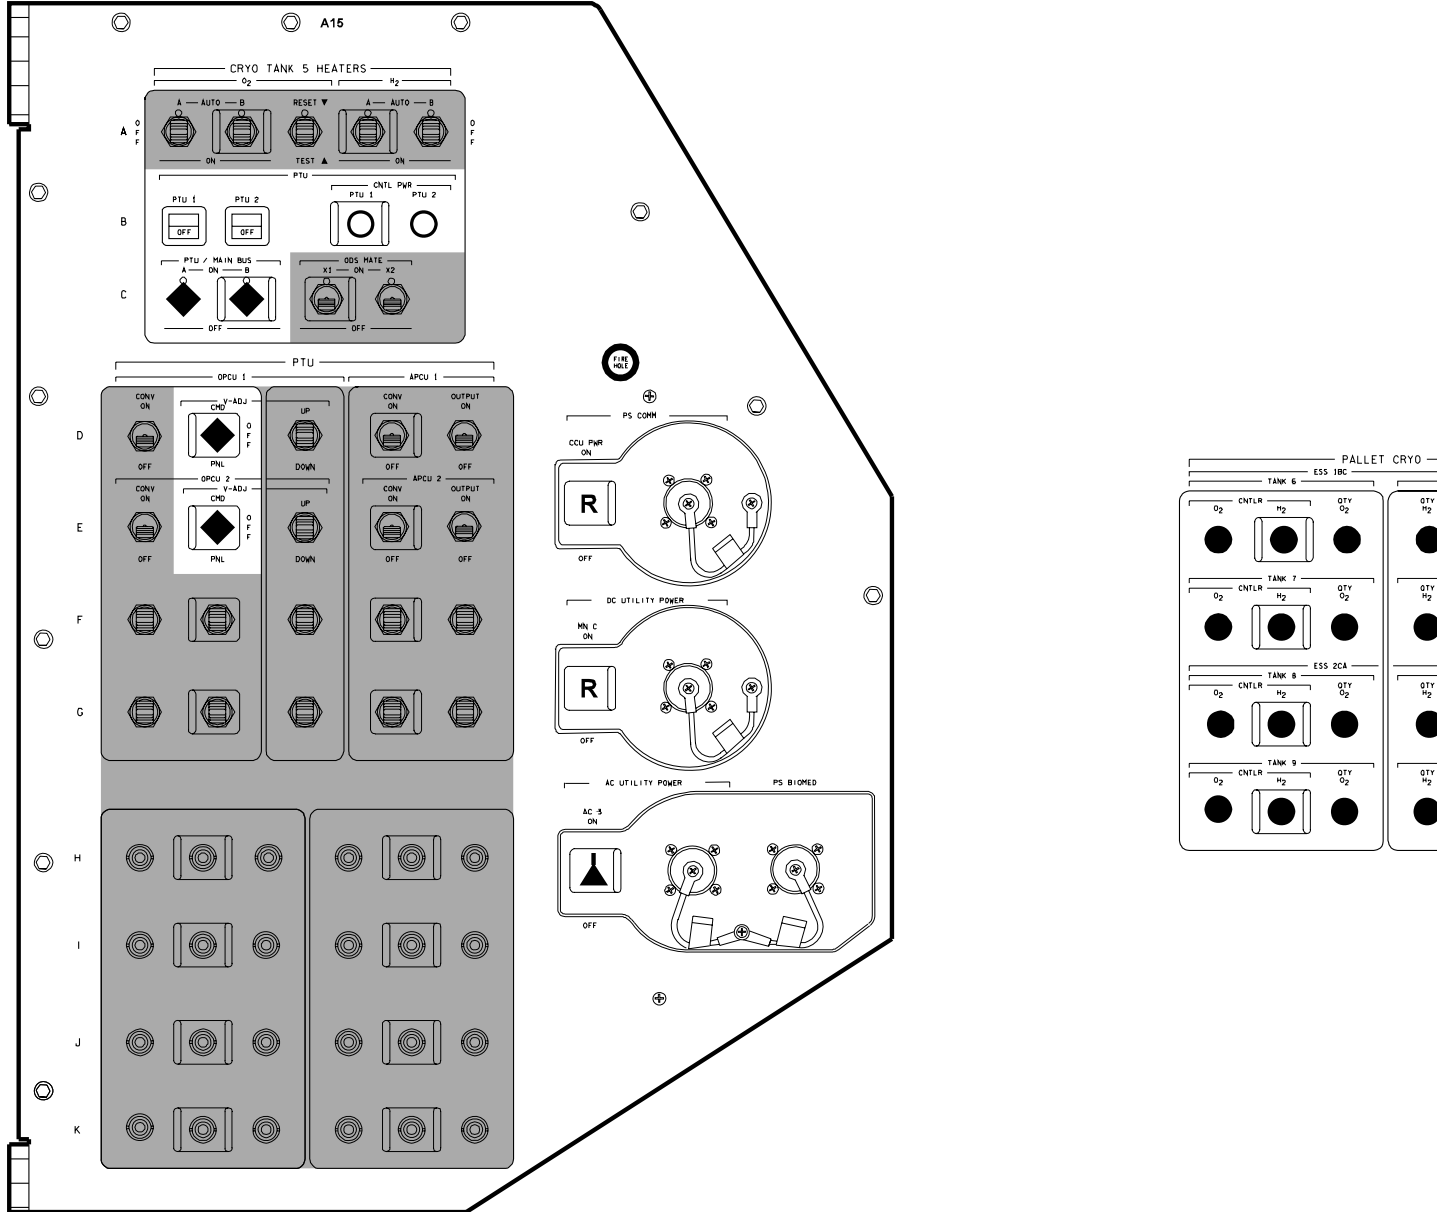




# OV105

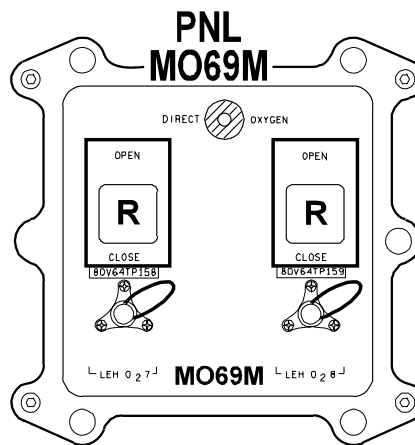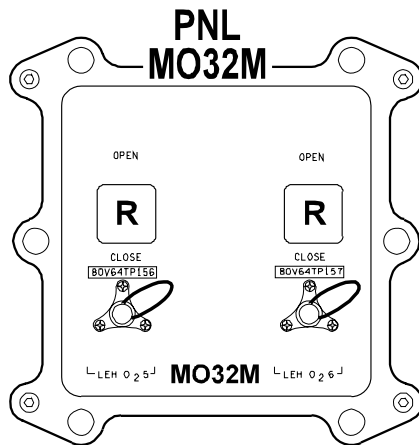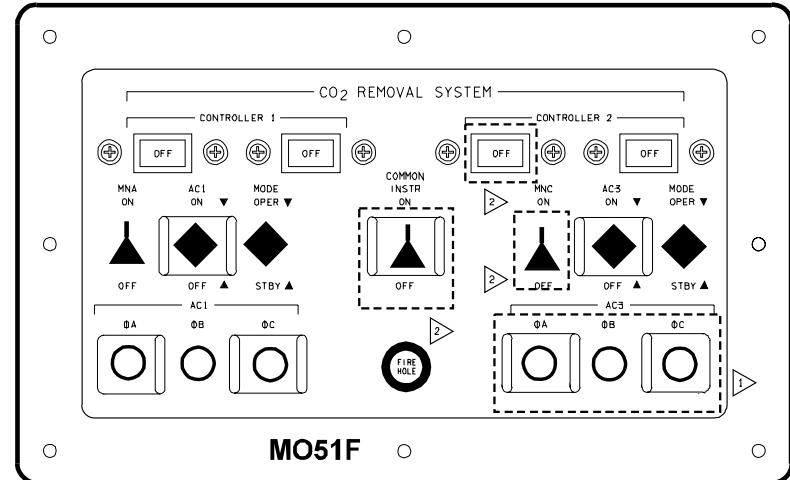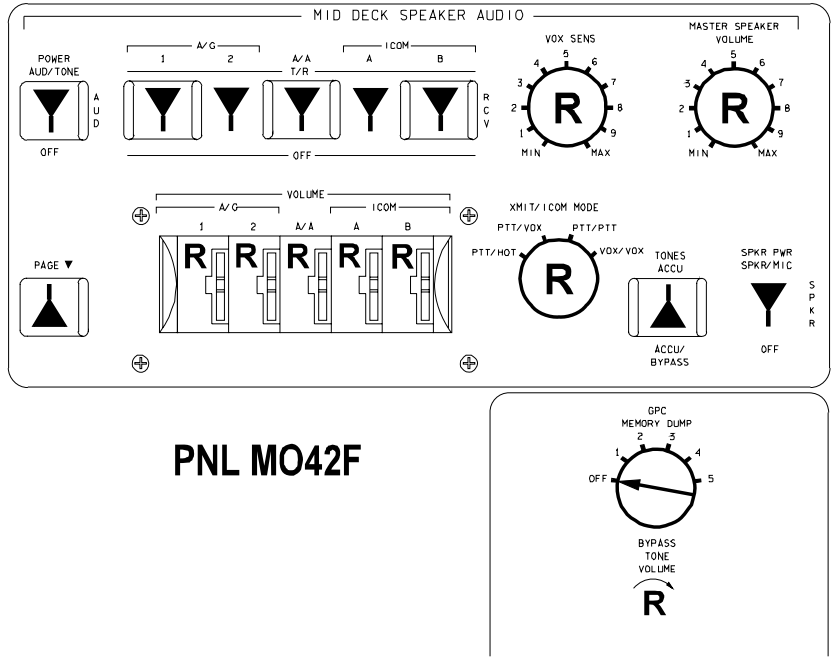

NOTES: CLOSED IF CO2 RMVL SYS FLOWN  
 ON IF CO2 RMVL SYS FLOWN



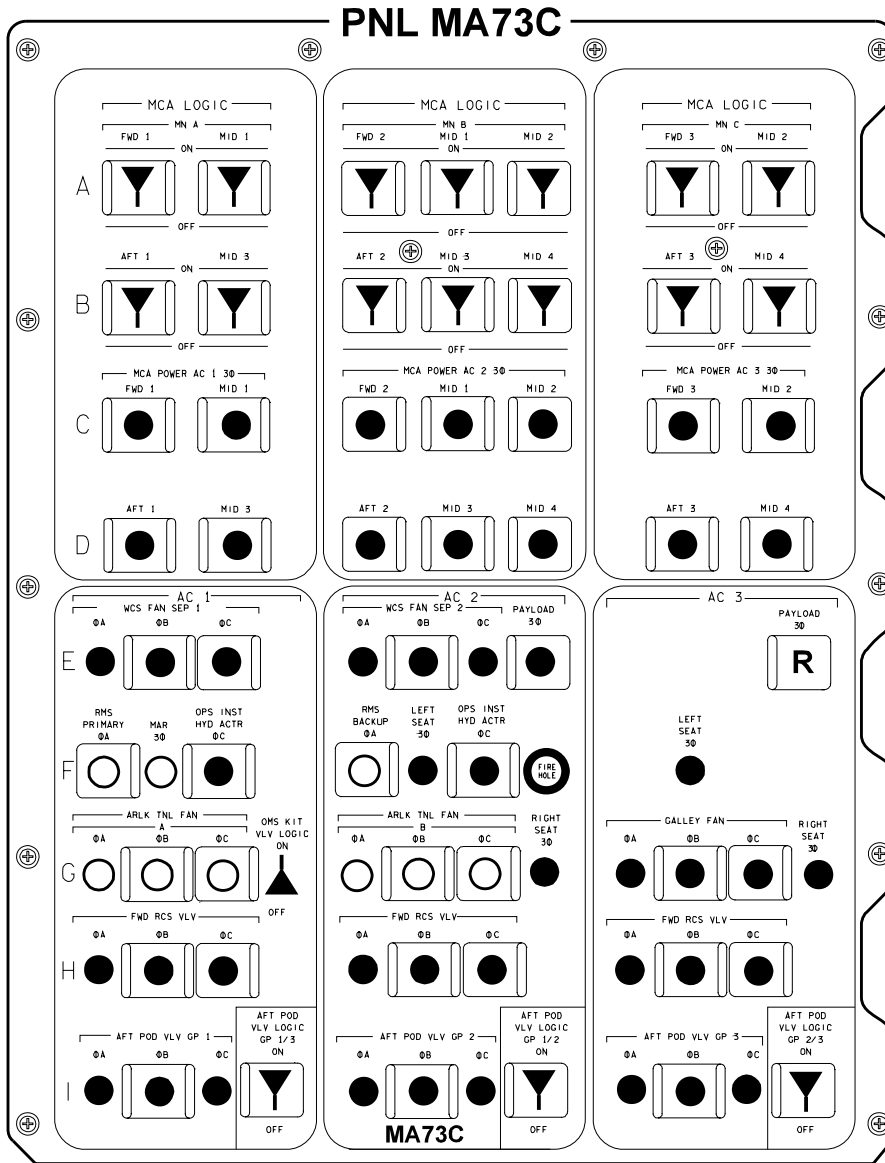

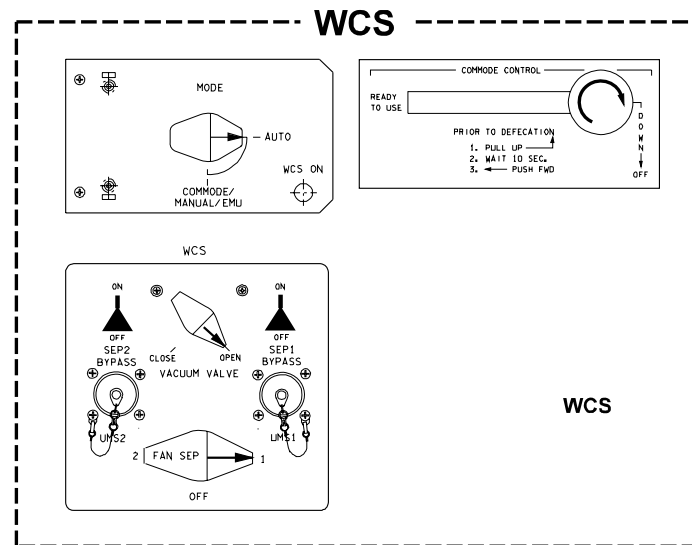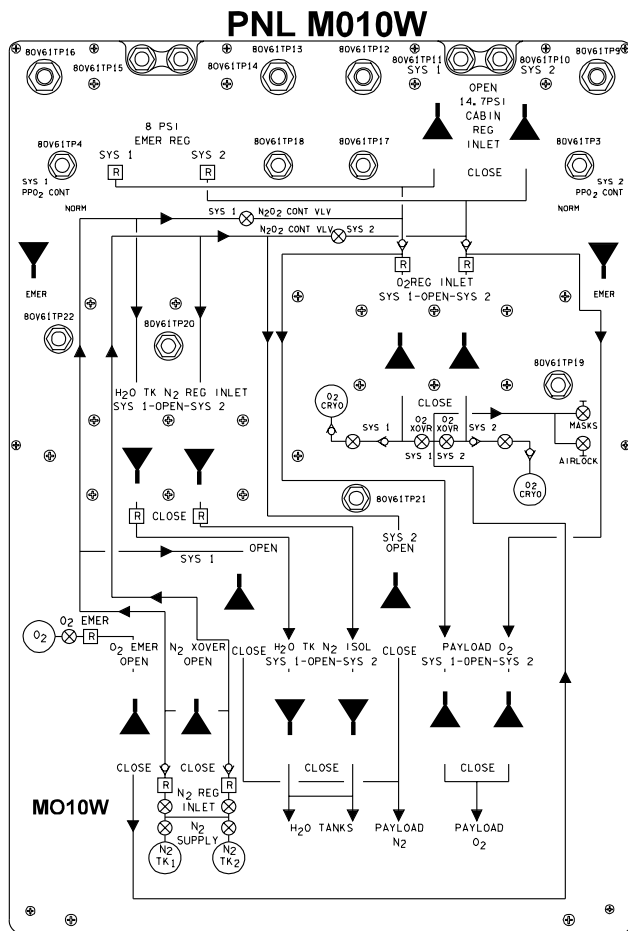

**BFS DEORBIT PREP NOTES**

# BFS DEORBIT PREP NOTES

## BFS DEORBIT PREP NOTES

- 1) BFS cannot support COAS Cal or an IMU Align
- 2) No AUTO DAP or AUTO TVC is available with BFS.  
After OPS 304 Transition, CSS must be used
- 3) BFS does not support MSN TIMER updates
- 4) BFS supports manual RCS to RCS Xfeed only
- 5) BFS follows PASS port moding via BFS I/O RESET
- 6) BFS does not support the following switches:

### NOTE

Boldface indicates items affected during Entry (MM 304)

### LEFT SEAT

- |      |    |  |
|------|----|--|
| C    | L1 | H2O PUMP LOOP 1 (GPC pos only)   |
| F6   |    | <b>ADI ERR</b><br><b>RATE</b><br><b>HSI SEL MODE</b><br><b>SOURCE 1, 2, 3</b><br><b>RDR ALTM</b> |
| C, P | C3 | DAP pb (six)<br>MAN MODE TRANSLATION pb (eight)<br>jet option PRI,ALT,VERN pb                    |
| O7   |    | <b>MSTR RCS XFEED</b><br>AFT L,R RCS TK ISOL (six) (GPC pos only)<br>XFEED (four) (GPC pos only) |

### RIGHT SEAT

- |            |           |   |
|------------|-----------|---|
| P          | F8        | <b>AIR DATA (slaved to CDRs)</b><br><b>ADI ERR</b><br><b>RATE</b><br><b>ATT (slaved to CDRs)</b><br><b>ATT REF pb</b><br><b>HSI SEL MODE</b><br><b>HSI SEL SOURCE TACAN (OV103,4),</b><br><b>GPS (OV105), MLS, NAV</b><br><b>(slaved to CDRs)</b> |
| F3         |           | <b>RDR ALTM</b><br><b>R TRIM RHC/PNL</b>  |
| R2         |           | HYD CIRC PUMP (three) (GPC pos only)  |
| <u>AFT</u> | <u>MS</u> | <b>R12U FC PURGE VLV (three) (GPC pos only)*</b><br><b>HTR (GPC pos only)*</b><br><b>GPC PURGE SEQ</b>  |

\* FC PURGE valve and heater functions can be ground-commanded through BFS when switches are in GPC position. Therefore, place these switches in GPC for entry

**CONTINGENCY DELTAS TO NOMINAL DEORBIT PREP**

NOTE

Perform NOMINAL DEORBIT PREP procedure with  
CONTINGENCY DELTAS for specific case

LOSS OF 2 CAB FANS ..... 5-3

LOSS OF AV BAY AIR COOLING ..... 5-4

8 PSI DEORBIT PREP ..... 5-6

AV BAY FIRE ..... 5-8

This Page Intentionally Blank

## LOSS OF 2 CAB FANS

Assumes LOSS OF 2 CAB FANS (ORB PKT, PWRDN) accomplished

1. Minimize use of IDPs,MDUs,FLT CNTLR PWR,DDUs to reduce cabin heat load and to save for use during entry
2. Minimize lighting
3. Wipe off any visible moisture with towels
4. Use IDP/CRT 4 when possible. Use one IDP/CRT with two MDUs as reqd. Use two IDP/CRTs with two MDUs for DPS ENTRY CONFIG. Save two forward IDP/CRTs with four MDUs that interface with those IDPs for entry
5. In DED DISP ENT CONFIG, do not power DDUs unless reqd. Minimize use
6. In DPS ENTRY CONFIG, skip SM CKPT except UL CNTL ENA – ITEM 36 EXEC. Skip MC9 RECONFIG
7. In CLOTHING CONFIG, prepare ACESs for donning. Don QDM if cabin temp > 90 degF and discomfort occurs. If cabin temp > 95 degF and no evaporative cooling, don ACES, activate O2, and close visor. Inflate Anti-G Suit as needed for circulatory support
8. ENTRY SWITCH LIST/VER will not reflect pwrdn items
9. FLUID LOADING: Continue drinking 8 oz container of water every 15 min with salt tablets every other 8 oz container through entry
10. Maintain tail Sun attitude/leave window shades installed until TIG-15 min

For ENTRY C/L deltas, go to LOSS OF 2 CAB FANS (ENT PKT, PWRDN)

## LOSS OF AV BAY AIR COOLING

Assumes MAL, DPS, GPC FRP-7 accomplished

1. For Av Bay 1 or 2 loss, skip DPS CONFIG FOR D/O PREP [4a], but perform ENSURE BFS GPC CAN COMMAND AN IDP [4b]  
 If Av Bay 3 loss, perform both DPS CONFIG FOR D/O PREP [4a] and ENSURE BFS GPC CAN COMMAND AN IDP [4b]
2. In APU/HYD CONFIG:  
 If AV BAY 1 or 2 air cooling lost:  
 | FCS CH (four) – ORIDE  
 If AV BAY 3 air cooling lost:  
 √FCS CH 1,2,3 (three) – AUTO  
 4 – OFF
3. In DED DISP ENT CONFIG, delay activation of affected GPS,TACANs,MLSs,AAAs,ADTAs (EQUIP COOLING MATRIX, ORB PKT, ECLS); deactivate if already activated
4. During DPS ENTRY CONFIG
  - a. If loss of AV BAY 3, do not activate GPC 3
  - b. In all cases, substitute appropriate NBAT in following activities:

TRANSITION GPC 1 & 2 TO GNC OPS 3

CONFIG GPC	LOSS OF		
	BAY 1	BAY 2	BAY 3
	3 02000	3 10000	3 12000
STR 1	2	1	1
2	2	1	2
3	2	1	1
4	2	1	2
PL 1/2	0	0	0
CRT 1	2	1	1
2	2	1	2
3	2	1	2
4	0	0	0
L 1	0	0	0
2	0	0	0
MM 1	2	1	1
2	2	1	2

TRANSITION GPC 1,2,3,4 TO GNC OPS 3

CONFIG GPC	LOSS OF		
	BAY 1	BAY 2	BAY 3
	3 02300	3 10040	3 12040
STR 1	3	1	1
2	2	4	2
3	3	1	4
4	2	4	2
PL 1/2	2	1	1
CRT 1	2	1	1
2	3	4	2
3	2	1	4
4	0	0	0
L 1	0	0	0
2	0	0	0
MM 1	2	1	1
2	3	4	2

Cont next page



**LOSS OF AV BAY AIR COOLING (Cont)**

RECONFIG MC 9 TABLE (GNC 9) FOR POST LANDING →

5. In C,P ENT FWD FLT DECK CONFIG:

- O14:A If AV BAY 1 air cooling lost:  
 O15:A     √BRAKES MNA – OFF  
 O16:A             MNB – ON  
            √MNC – OFF  
 O14:A If AV BAY 2 air cooling lost:  
 O15:A     BRAKES MNA – ON  
 O16:A             √MNB – OFF  
            MNC – ON

6. ENT SWITCH LIST/VERIF will not reflect pwrn items

7. Incorporate following pen and inks to ENT MNVR

Cue Cards:

- El: Power up affected air-cooled equipment  
 except affected TACAN (OV103,4) (EQUIP COOLING  
 MATRIX, ENT PKT, ECLS)

If OV103,4:

- V = 10K: If unaffected TACAN failed,  
 Affected TACAN MODE – GPC

O7

8. If just prior to OPS 302 TRANSITION, affected GPCs have  
 been in HALT for ≥ 3.5 hr, add to RS as follows:

- a. Modify MC3 per table →  
 b. MODE affected GPCs to RUN  
 c. BFC CRT DISP – OFF  
    OPS 301 PRO  
    BFC CRT DISP – ON  
    BFS GNC I/O RESET  
 d. FCS CH (four) – AUTO

9. Update GPC/FCS CHANNEL CONFIGURATION (Cue Card)

CONFIG	LOSS OF		
	BAY 1	BAY 2	BAY 3
GPC	9	9	9
	02300	10040	12040
STR 1	3	1	1
2	2	4	2
3	3	1	4
4	2	4	2
PL 1/2	2	1	1
CRT 1	2	1	1
2	3	4	2
3	0	0	4
4	3	4	0
L 1	0	0	1
2	0	0	2
MM 1	2	1	1
2	3	4	2

CONFIG	LOSS OF		
	BAY 1	BAY 2	BAY 3
GPC	3	3	3
	12340	12045	12340
STR 1	1	1	1
2	2	2	2
3	3	4	4
4	4	5	3
PL 1/2	2	1	1
CRT 1	2	1	1
2	1	2	2
3	3	4	4
4	0	0	0
L 1	0	0	0
2	0	0	0
MM 1	2	1	1
2	3	4	2

## 8 PSI DEORBIT PREP

Assumes LOSS OF CABIN PRESS (ORB PKT, PWRDN) accomplished

If TIG < 4 hr: Begin NOMINAL DEORBIT PREP timeline at TIG-4 hr immediately and perform procedures as rapidly as possible with all following CONTINGENCY DELTAS except step 7

If TIG > 4 hr: Perform steps 1, 2, 3, and 4;

At TIG-4 hr, perform NOMINAL DEORBIT PREP with all remaining CONTINGENCY DELTAS

1. Back out of PRIORITY PWRDN, as reqd (ORB PKT, PRIOR PWRDN)
2. If previous FC PURGE was not accomplished within last 6 hr: Accomplish FC PURGE (ORB OPS, EPS) anytime prior to DPS ENTRY CONFIG
3. MS accomplish CABIN CONFIG/STOW (FLIGHT PLAN) as time permits
4. Perform IMU ALIGN-S TRK (ORB OPS, GNC)  
√MCC for align attitudes or use STAR PAIRS PAD (ORB OPS FS, PTG)
5. Leave shades in until SEAT INGRESS
6. Minimize IDP/MDU use until TIG-20
7. Delay blocks 4a and 4b until immediately prior to DPS ENTRY CONFIG block 12. In block 4a activate GPC 1 stringing 1212
8. Replace RAD BYPASS/FES C/O with following:

	√DAP: A/AUTO/ALT (PRI)
ML86B:A	√cb MNC SPLY H2O XOVR VLV – cl
R11L	√SPLY H2O TK A OUTLET – CL (tb-CL) XOVR VLV – OP (tb-OP)
L1	√HI LOAD DUCT HTR – B EVAP – ENA RAD BYP VLV MODE (two) – MAN MAN SEL (two) – BYP (tb-BYP ~3 sec) RAD CNTLR LOOP (two) – OFF
	After 2.5 min:
O1	√FREON EVAP OUT TEMP ind: $39 \pm 1$ degF
L1	√FLOW PROP VLV LOOP 1,2 tb (two) – ICH RAD CNTLR OUT TEMP – NORM

Cont next page

## 8 PSI DEORBIT PREP (Cont)

9. In DED DISP ENT CONFIG, delay activation of ADTAs, GPS, TACANs, MLS, RAs, and DDUs
10. In ENT FWD FLT DECK CONFIG block 14, skip panel L2 actions under PCS/ARS CONFIG
11. In ENT MIDDECK CONFIG block 16, skip all of MIDDECK PCS
12. Continue to manage cabin atmosphere per O2(N2) FLOW HIGH/CABIN P LOW/dP/dT (OPCL, ECLS) as reqd until just prior to WCS DEACT block 27. When ready to perform WCS DEACT, config PCS as follows:

MO10W	14.7 CABIN REG INLET SYS 1,2 – CL
	O2 REG INLET SYS 1,2 – CL
	H2O TK N2 REG INLET 1,2 VLV – OP
MO69M	LEH O2 8 VLV – CL
	Remove, stow Bleed Orifice
L2	O2/N2 CNTRL VLV SYS 1,2 – OP
	O2 XOVR SYS 1,2 – OP
C5	DIRECT O2 VLV – CL
	When PPO2 < 2.2
	DON ACES, open LEH O2 vlvs
	check tabs, visors – CL, Suit O2 – ON
13. ENTRY SWITCH LIST/VER will not reflect pwrdn items

### IN ENT CL

14. At TIG-4, activate DDUs
15. At EI-15, activate unpowered GPS. Work star block in step 2a of GPS TROUBLESHOOTING (EPCL, GNC) (any vehicle)
16. At EI, activate ADTAs
17. At V=15K, activate TACANs (except OV105), MLSs, RAs

## AV BAY FIRE

Assumes AV BAY FIRE (ORB PKT, PWRDN) and MAL, ECLS SSR-12, AV BAY FIRE RECOVERY/RECONFIG accomplished

1. For Av Bay 1 or 2 loss, skip DPS CONFIG FOR D/O PREP 4a , but perform ENSURE BFS GPC CAN COMMAND AN IDP 4b  
If Av Bay 3 loss, perform both DPS CONFIG FOR D/O PREP 4a and ENSURE BFS GPC CAN COMMAND AN IDP 4b
2. In APU/HYD CONFIG:  
If AV BAY 1 or 2 air cooling lost:  
| FCS CH (four) – ORIDE  
If AV BAY 3 air cooling lost:  
√FCS CH 1,2,3 (three) – AUTO  
4 – OFF
3. During DED DISP ENT CONFIG, power up only three ADTAs, three AAs, two MLSs, and two GPS (OV105) or two TACANs (OV103,4)

**AV BAY FIRE (Cont)**

4. During DPS ENTRY CONFIG
  - a. If loss of Av Bay 3, do not pwrap GPC 3
  - b. During SM CHECKPOINT, skip MMU 1 (if Av Bay 1) or MMU 2 (if Av Bay 2)
  - c. Using column for affected Av Bay, substitute appropriate NBAT in following activities

**TRANSITION GPC 1 & 2 TO OPS 3**

CONFIG GPC	LOSS OF		
	BAY 1	BAY 2	BAY 3
	3 02000	3 10000	3 12000
STR 1	2	1	1
2	2	1	2
3	2	1	1
4	2	1	2
PL 1/2	0	0	0
CRT 1	2	1	1
2	2	1	2
3	2	1	2
4	0	0	0
L 1	0	0	0
2	0	0	0
MM 1	2	1	1
2	2	1	2

**TRANSITION GPC 1,2,3,4 TO OPS 3**

CONFIG GPC	LOSS OF		
	BAY 1	BAY 2	BAY 3
	3 02300	3 10040	3 12040
STR 1	3	1	1
2	2	4	2
3	3	1	4
4	2	4	2
PL 1/2	2	1	1
CRT 1	2	1	1
2	3	4	2
3	2	1	4
4	0	0	0
L 1	0	0	0
2	0	0	0
MM 1	2	1	1
2	3	4	2

**RECONFIG MC 9 TABLE (GNC 9)  
FOR POST LANDING**

CONFIG GPC	LOSS OF		
	BAY 1	BAY 2	BAY 3
	9 02300	9 10040	9 12040
STR 1	3	1	1
2	2	4	2
3	3	1	4
4	2	4	2
PL 1/2	2	1	1
CRT 1	2	1	1
2	3	4	2
3	0	0	4
4	3	4	0
L 1	0	0	1
2	0	0	2
MM 1	2	1	1
2	3	4	2




5. ENT SWITCH LIST/VERIF pictorials will not reflect pwrn items

This Page Intentionally Blank

**PLBD CONTINGENCY EVA TIMELINE**

This Page Intentionally Blank



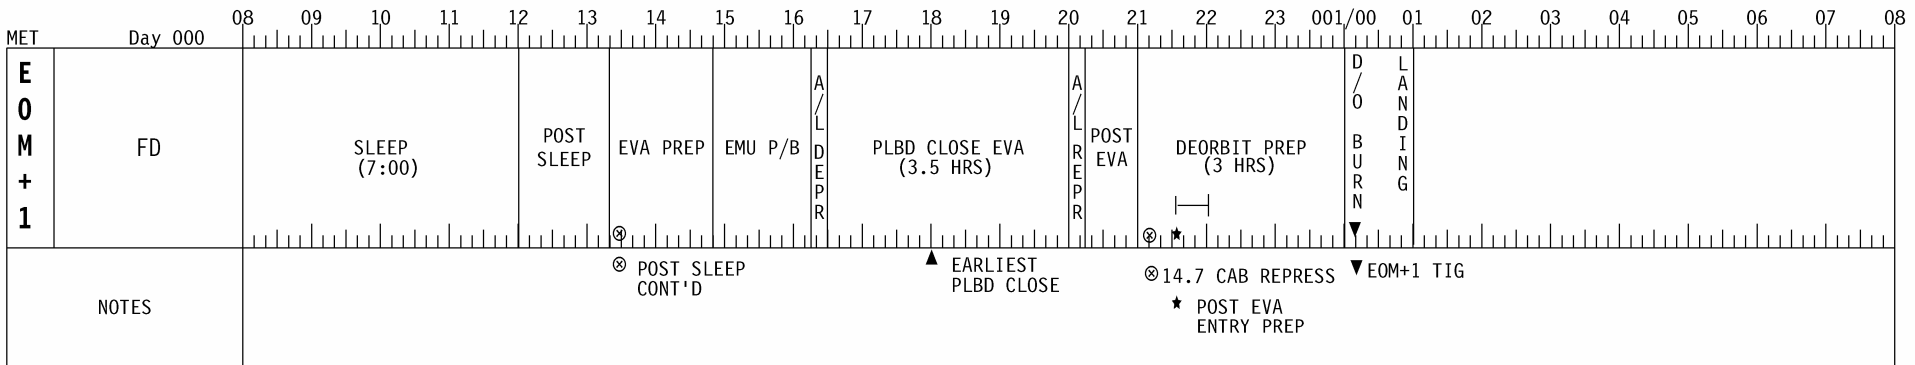
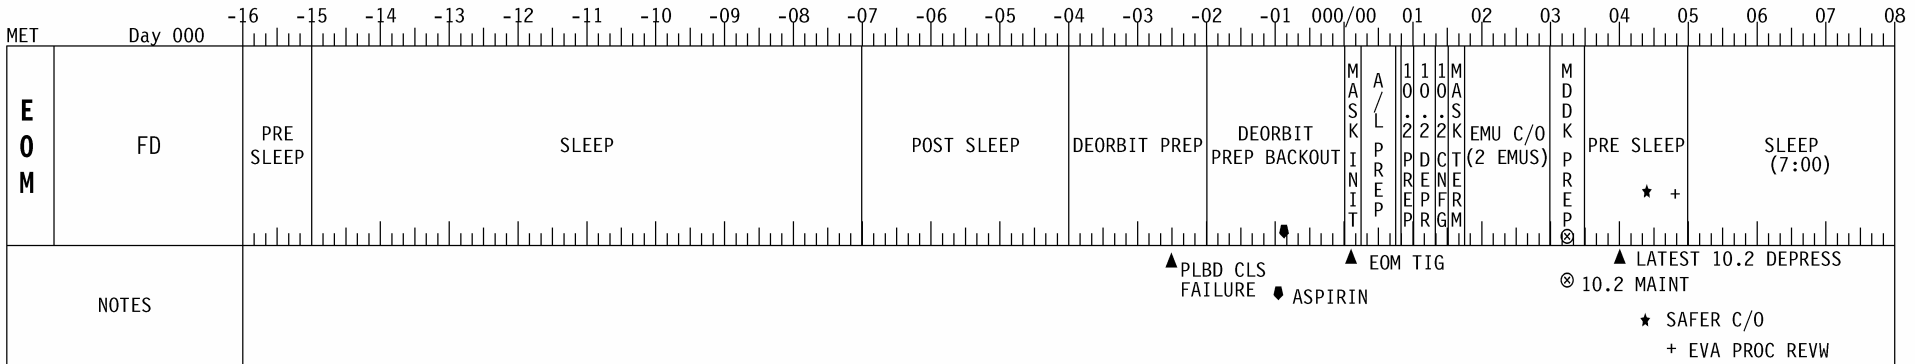
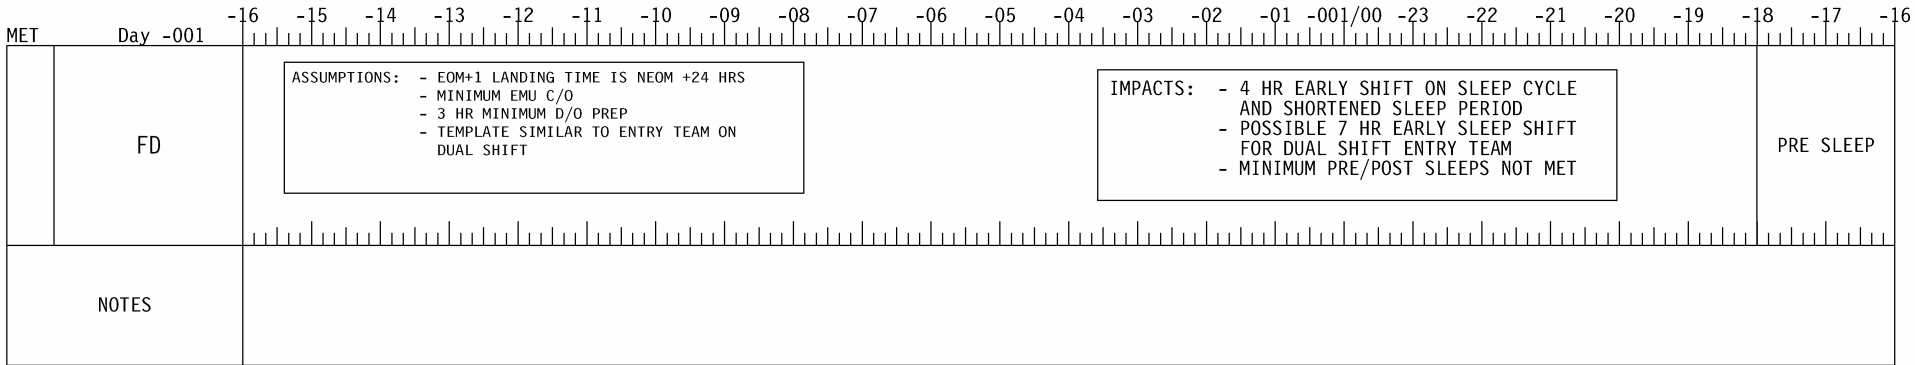


## PLBD CONTINGENCY EVA NOTES

1. This timeline is an overview template that covers a payload bay door contingency EVA with a 10.2 cabin depress. The scenario starts from a closure failure 1.5 hr into the deorbit prep followed by a D/O PREP BACKOUT and cabin depress activities. The EVA and landing will occur on the EOM + 1 day
2. The timeline assumes that a two-crewmember 3.5 hr EVA to repair the problem is immediately followed by an entry to the prime landing site
3. Specific procedure block callouts for the EV and IV crewmembers during the EVA will be coordinated in real time
4. RCS hot fire testing, FCS C/O, and CABIN STOW are assumed to be previously accomplished
5. The timeline utilizes minimum activity durations for POST/PRE SLEEPS, EMU C/O, and DEORBIT PREP
6. The crew will be reqd to perform A/L PREP during Mask Pre-Breathe prior to cabin depress
7. Due to necessity of performing the EVA on the same day as landing, the crew is reqd to start their sleep period 3.5 hr earlier than the previous day
8. This template can be adapted for dual-shift timelines by scheduling Non-Entry team sleep with Entry team sleep in order to modify the timeline to single-shift operations
9. The MET scale on this timeline is actually a PET scale counting down to nominal deorbit TIG

## HARDWARE CONTINGENCY EVA TIMELINE

This Page Intentionally Blank

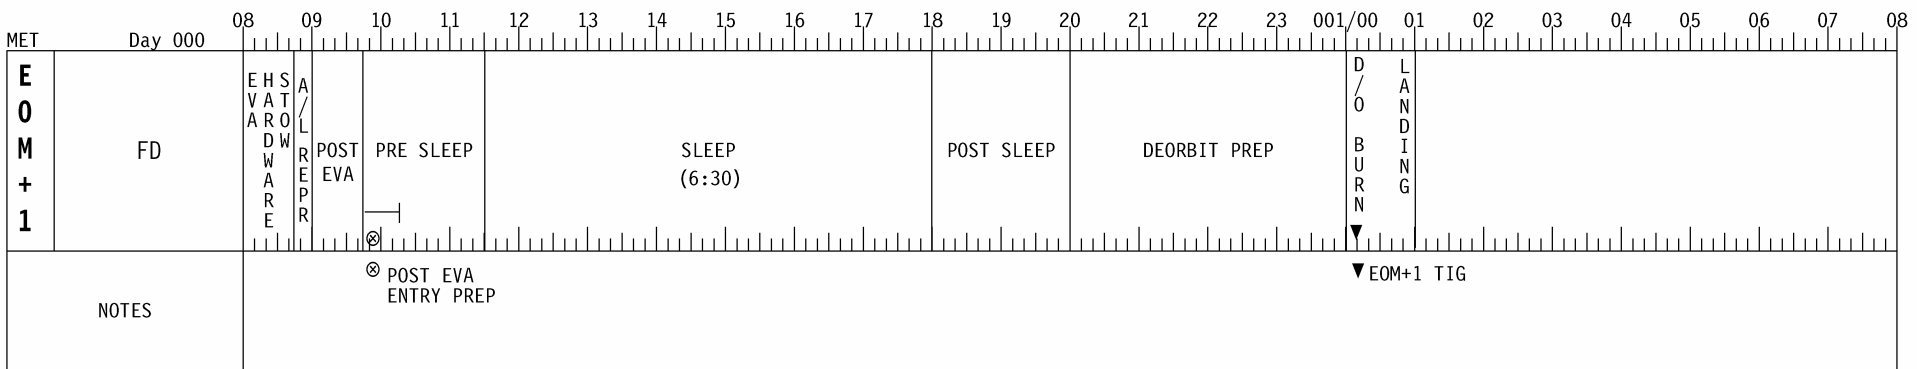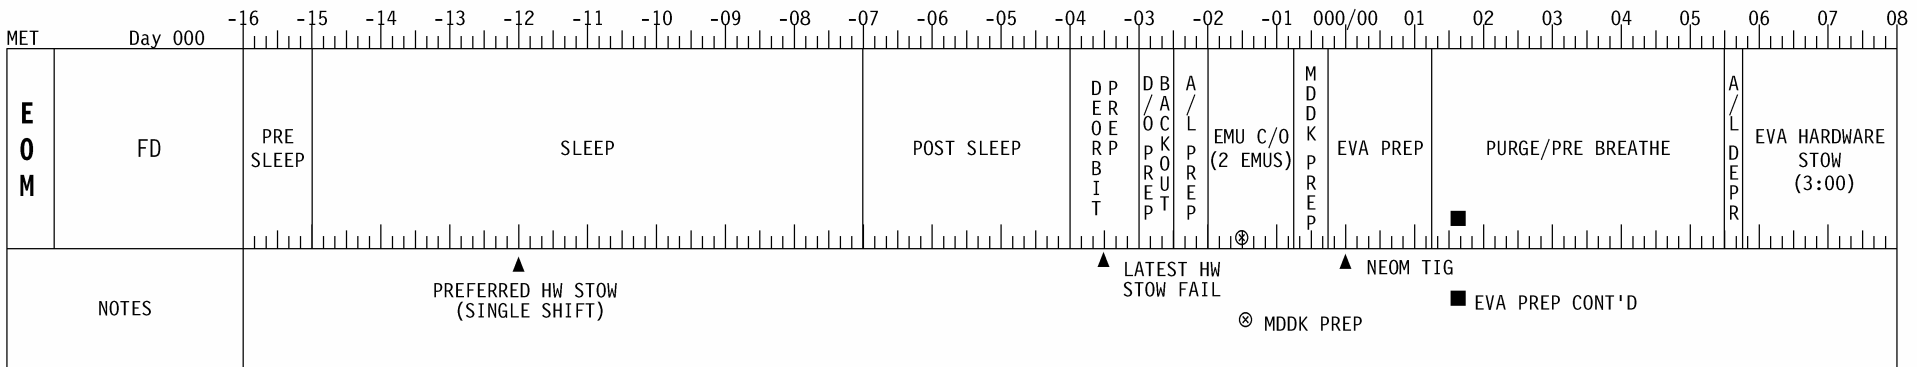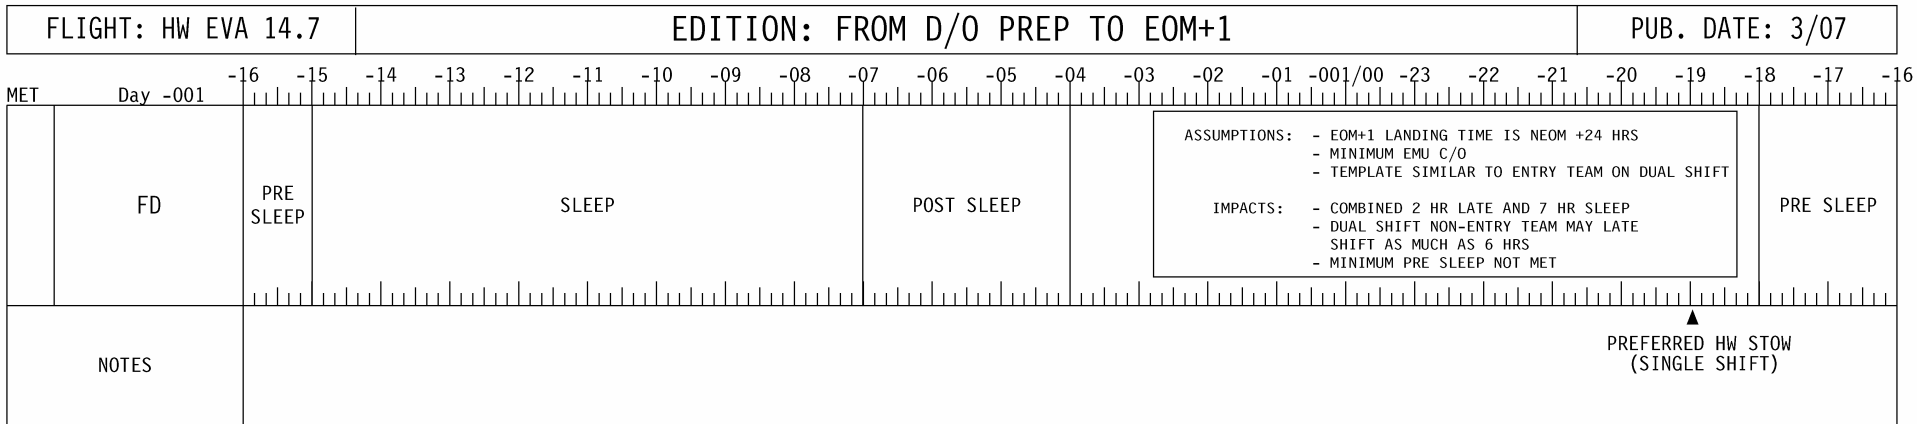

## HARDWARE CONTINGENCY EVA NOTES

1. This timeline is an overview template that covers KU antenna, RMS, and RAD stow contingency EVAs with a “no cabin depress” scenario starting from a stow failure as late as 30 min into deorbit prep. The Pre-Breathe and EVA will be performed after D/O BACKOUT is complete and a landing will occur on the EOM + 1 day
2. The timeline assumes a two-crewmember 3 hr EVA to repair the problem
3. Specific procedure block callouts for the EV and IV crewmembers during the EVA will be coordinated in real time
4. RCS hot fire testing, FCS C/O, and CABIN STOW are assumed to be previously accomplished
5. The timeline utilizes minimum activity durations for EMU C/O and PRE/POST SLEEP
6. Due to the necessity of the timeline, the crew is reqd to shorten their sleep to 7 hr and shift the sleep late by 2 hr
7. This template can be adapted for dual-shift timelines by scheduling Non-Entry team sleep with Entry team sleep in order to modify the timeline to single-shift operations
8. The MET scale on this timeline is actually a PET scale counting down to nominal deorbit TIG

CUE CARD CONFIGURATION

MS MIDDECK ACTIVITIES (Front).....	CC 8-2
(Back).....	CC 8-3
MS MIDDECK BACKOUT ACTIVITIES (Front) .....	CC 8-4
(Back).....	CC 8-5

CUE CARD  
CONFIG

# CUE CARD CONFIG

TOP

## MS MIDDECK ACTIVITIES

NOTE

WAIT FOR GO FROM CDR OR PLT BEFORE STARTING ANY ACTIVITY ON THIS PAGE

TIME (TIG-)	MS MIDDECK ACTIONS
3:50	<u>ENT STOWAGE</u> [ 3 ]
3:50	<u>ENT AIRLOCK CONFIG</u> [ 3A ], 1-32
3:35	<u>SPECIALIST SEAT INSTALLATION</u> Verify Leg Attach Collars (four) – DOWN/LOCKED Verify LiOH Door Latches (four) – ENGAGED
3:10	<u>PARTIAL ENT SWITCH LIST/VERIF (MID)</u> , 3-10 thru 3-12
1:55	<u>ENT MIDDECK CONFIG</u> [ 16 ]
1:50	<u>FINAL ENT SWITCH LIST/VERIF (MID)</u> , 3-30 thru 3-32
1:40	<u>ENTRY REVIEW</u>
1:28	DSO 603, if reqd (BIOMED, BIOMED DSOs)
1:10	<u>CLOTHING CONFIG</u> [ 20 ], 1-32
1:00	Begin Fluid Loading per individual prescription. Fluid Loading should be completed by EI For 1 rev waveoff, repeat half the protocol If > 1 rev waveoff, repeat entire protocol
0:55	Remove, stow Side Hatch UV Filter, Locking Device, and Pyro Box Safing Pin
0:51	<u>MD AUD SPKR CONFIG</u> [ 29 ], 1-32
0:35	<u>GALLEY DEACT</u> [ 26 ]
0:33	<u>WCS DEACT</u> [ 27 ], 1-32

<u>ENT MIDDECK CONFIG</u> [ 16 ]	
MO42F	<u>ENTRY COMM</u> MIDDECK SPKR AUD A/G 1 – T/R A/G 2 – T/R A/A – T/R ICOM (two) – T/R VOX SENS – R VOL tw (five) – R XMIT/ICOM MODE – R
MO10W	<u>MIDDECK PCS</u> 14.7 CAB REG INLET vlv (two) – CL H2O TK N2 REG INLET vlv (two) – OP O2 REG INLET vlv (two) – CL
MO32M	LEH O2 vlv (two) – R
MO69M	LEH O2 8 vlv – CL Remove, stow O2 Bleed Orifice LEH O2 8 vlv – R 7 vlv – R
SIDE HATCH	NEG PRESS RLF VLV COVER (two) – pull open to vent; push firmly to close
MA73C:F	<u>RMS PNL LTS</u> (if RMS onboard) cb RMS PRI ΦA – op B/U ΦA – op <u>AC UTILITY OUTLET</u> cb AC1 MAR 3Φ – op

<u>ENT STOWAGE</u> [ 3 ] <u>PERSONAL HYGIENE SYS STOWAGE</u> Stow: Personal Hygiene Kits Hose <u>AIRLOCK CLOSEOUT</u> Tether soft goods to EVA tether point or A/L Stowage Bag. Gray Tape to floor <u>POLE SETUP</u> Reinstall Stbd Pip Pin Reinstall large Port Pin: Retract and hold Locking Pin (Ring) Reinstall large Pin Release Locking Pin (Ring) Slide forward Safing Latch √Pole Straps secure <u>DFD STOWAGE</u> Stow FLIGHT PLAN <u>CABIN CONFIG</u> Stow: Backup PGSC Middeck Camrs, Accessories FWD/AFT Shades, Filters Exercise Equipment Quick Don Masks √Retention net is in ASC/ENT config <u>EGRESS ROUTE CONFIG</u> Tape Foot Loops in egress routes <p style="text-align: center;">NOTE</p> Chemlights are middeck carry-on items. Activate green chemlights after TIG. Do not activate orange chemlights (slide ops only) Install green chemlights (8 ea) near egress hdw and egress routes Install orange chemlights (2 ea) above side hatch
--

<u>GALLEY DEACT</u> [ 26 ]	
GALLEY	OVEN/RHS – OFF H2O HTRS (two) – OFF √OVEN FAN – OFF √REHYD STA lever – cl (push in) √OVEN DOOR LATCH – latched  MA73C:G      cb AC3 GALLEY FAN (three) – op ML86B:A      MNC SPLY H2O GALLEY SPLY – op :B           MNA GALLEY OVEN – op MNB GALLEY H2O HTR – op

HOOK  
VEL-  
CRO

HOOK  
VEL-  
CRO

HOOK  
VEL-  
CRO

(reduced copy)

CC-8-2

D/O/ALL/GEN Q

D/O-1a/E/A



TOP  
BACK OF "MS MIDDECK ACTIVITIES"

ENT AIRLOCK CONFIG 3A	
MO13Q	1. √AIRLK FAN A(B) – OFF
TNL EXT	2. Disconnect A/L Fan Inlet Duct from aft middeck floor fitting and A/L Fan Inlet and strap to Tunnel Extension wall
MA73C:G	3. cb AC1,2 ARLK TNL FAN A,B (six) – op
EXT A/L	4. Unstow,install diffuser cap on aft middeck floor fitting
AW18A	5. NEG PRESS RLF vlv cover (two) – pull open to vent; push firmly to close
INNER HATCH	6. LTG FLOOD 1(3,4) – OFF
	7. Perform AIRLOCK ENTRY SWITCH LIST/VERIFICATION, 3-3
	8. Close hatch: Position handle to preclosing posn per decal Hatch – rotate about hinge and push Handle – CCW to LATCH Lock lever to LOCKED
	9. Equal vlv (two) – NORM, install caps
MIDDECK FLR	10. √EMU O2 ISOL vlv – CL
MO13Q	11. AIRLK 2 – OFF/ON
	12. √AIRLK H2O S/O vlv – OP (tb-op)
ML86B:C	13. cb MNB EXT ARLK HTR VEST Z1/2/3 – op If TNL ADAPT flown: :E 14. cb MNA FLOOD TNL ADAPT 2 – op cb MNB FLOOD TNL ADAPT 3 – op cb MNC FLOOD TNL ADAPT 4 – op :F 15. cb MNA FLOODS AIRLK 1 – op MIDDECK 9 – op cb MNB FLOODS MIDDECK 10 – op AIRLK 3 – op cb MNC FLOODS AIRLK 4 – op :G 16. cb ESS 1BC FLOOD AIRLK 2 – op If TNL ADAPT flown: 17. cb ESS 1BC FLOOD TNL ADAPT 1 – op

CLOTHING CONFIG 20	
	Unstow, don: ACES Harness Boots
	Verify ACES Gloves (Spare) available. Relocate as reqd
	Remove radiation dosimeter from inflight garments and insert in ACES; if waveoff, remove radiation dosimeter from ACES and insert in inflight garments
	<b>NOTE</b>
	Refer to flight specific utility outlet plug-in plan if reqd
	Connect middeck cooling units per PWR/DATA/VIDEO: ASCENT/ENTRY CONFIG (REF FS, UTIL PWR)
MO13Q, MO30F, MO52J, PDB J2(3,4), ML85E (MUP)	DC UTIL PWR MNA(B,C) – ON as reqd Cooling units – Hose Jumper Plug installed Pre-chill cooling units 10 min prior to seat ingress

WCS DEACT 27	
WCS	VAC VLV – CL √MODE sel – AUTO FAN SEP sel – OFF Unstow hose from cradle, attach hose to WCS housing via Velcro straps Stow: WCS Trash Can Mirror Privacy Curtain  Foot/toe restraints – up,latched  Close and latch door
ML31C	VAC VENT ISOL VLV BUS SEL – MNB CNTL – CL (tb-CL) NOZ HTR – OFF  √Middeck lts as reqd

MD AUD SPKR CONFIG 29	
MO42F MO39M	MIDDECK AUD SPKR PWR – OFF MIDDECK COMM CCU PWR – OFF Disconnect and stow Handheld Mic Configure MHA to MID CCU per entry plug-in plan Connect Lightweight Headsets or ACES Comm Cap MIDDECK COMM CCU PWR – ON

HOOK  
VEL-  
CRO

HOOK  
VEL-  
CRO

HOOK  
VEL-  
CRO

D/O-1b/E/A

CC-8-3  
(reduced copy)

D/O/ALL/GEN Q

TOP

### MS MIDDECK BACKOUT ACTIVITIES

NOTE  
WAIT FOR GO FROM CDR OR PLT BEFORE STARTING ANY ACTIVITY ON THIS PAGE

TIME (ET)	MS MIDDECK ACTIONS
00:20	<u>SPECIALIST SEAT EGRESS</u>
00:21	MO32M LEH O2 vlv (two) – CL MO69M LEH O2 vlv (two) – CL
00:22	<u>PRELIM MIDDECK CONFIG</u> [ 7 ]
00:40	If reqd. PAYLOAD REACT, (PL OPS, DEORB PREP) or PAYLOAD REACTIVATION (SODF: ASSY OPS: DEORBIT PREP)
00:52	<u>MIDDECK CONFIG</u> [ 14 ]
01:00	<u>CLOTHING CONFIG</u> [ 15 ], 2-18
01:40	<u>ON-ORBIT PCS 2(1) CONFIG</u> [ 19 ], 2-18
01:42	<u>SPECIALIST SEAT REMOVAL/STOWAGE</u>
01:50	<u>AIRLOCK SETUP FOR INGRESS</u> [ 21 ], 2-18

<u>PRELIM MIDDECK CONFIG</u> [ 7 ]	
	<u>INSTALL FILTERS</u> Unstow,install: Side Hatch UV Filter and Locking Device Pyro Box Safing Pin
	<u>COMM CONFIG</u> Unstow: Headsets, Handheld Mics and/or Wireless Comm if flown (see <u>WCCS COMM PLAN</u> (Cue Card))
	If WCCS perform STD WCCS CONFIG (ORB OPS, COMM/INST) or see <u>WCCS COMM PLAN</u> (Cue Card)
MO42F	If middeck Handheld Mic/speaker operation: MIDDECK SPKR AUD SPKR PWR – SPKR/MIC A/G 1 – T/R, tw-2 A/G 2 – RCV, tw-2 A/A – RCV, tw-2 ICOM A – T/R, tw-2 ICOM B – RCV, tw-2 XMIT/ICOM MODE – PTT/PTT MSTR SPKR VOL – 8
MO39M	MIDDECK COMM CCU PWR – OFF Connect Handheld Mic to CCU MIDDECK COMM CCU PWR – ON
ML31C	<u>HTR CONFIG</u> VAC VENT ISOL VLV BUS SEL – MNA NOZ HTR – ON ISOL VLV CNTL – OP (tb-OP)
	* If VAC VENT ISOL VLV CNTL tb – CL or bp: *
	* VAC VENT ISOL VLV BUS SEL – MNB *
	* CNTL – OP (tb-OP) *
	* If VAC VENT ISOL VLV CNTL tb still CL or bp: *
	* √MCC for further actions *

<u>MIDDECK CONFIG</u> [ 14 ]	
ML86B:A :B	<u>GALLEY ACTIVATION</u> cb MNC SPLY H2O GALLEY SPLY – cl cb MNA GALLEY OVEN – cl cb MNB GALLEY H2O HTR – cl
R11L:G	√SPLY H2O GALLEY SPLY VLV – OP (tb-OP)
GALLEY	H2O HTRS (two) – ON OVEN/RHS – ON
MA73C:G	cb AC3 GALLEY FAN (three) – cl Unstow,install Personal Hygiene Hose
WCS	<u>WCS ACTIVATION</u> VAC VLV – OP  Unstow Urinal Hose from Velcro strap, install hose in cradle √MODE – AUTO √CRADLE – AUTO FAN SEP SEL sw – 1 Unstow hose from cradle (√airflow) √WCS ON It – ON Stow hose in cradle √WCS ON It – OFF  Unstow,install: WCS Trash Can Mirror Urine Collection Cue Card Foot/Toe Restraint – down,locked  (Cont next page)

HOOK  
VEL-  
CRO

HOOK  
VEL-  
CRO

HOOK  
VEL-  
CRO

CC 8-4  
(reduced copy)

D/O/ALL/GEN Q

D/O-2a/E/A

TOP  
BACK OF "MS MIDDECK BACKOUT ACTIVITIES"

If PRIORITY PWRDN GROUP C not reqd:  
PGSC ACTIVATION (backup PGSC) PGSC  
ACTIVATION (ORB OPS, PGSC)

POLE STOWAGE

Remove large Port Pin:  
Slide back Safing Latch  
Retract and hold Locking Pin (Ring)  
Remove large Pin  
Release Locking Pin (Ring)  
Remove Stbd Pip Pin  
Stow Pole

FLOODLIGHT CONFIG

If TNL ADAPT flown:

ML86B:E	cb MNA FLOOD TNL ADAPT 2 - cl
	cb MNB FLOOD TNL ADAPT 3 - cl
	cb MNC FLOOD TNL ADAPT 4 - cl
ML86B:F	cb MNA FLOODS AIRLK 1 - cl
	MIDDECK 9 - cl
	cb MNB FLOODS MIDDECK 10 - cl
	AIRLK 3 - cl
	cb MNC FLOODS AIRLK 4 - cl
ML86B:G	cb ESS 1BC FLOOD AIRLK 2 - cl

If TNL ADAPT flown:  
cb ESS 1BC FLOOD TNL ADAPT 1 - cl

CLOTHING CONFIG 15

Doff/stow:

Harness, Boots, ACES, UCD (if not used)

Remove radiation dosimeter from ACES and insert in inflight garments

Doff, stow in Wet Trash (if used):

UCD (clamp)  
Emesis Bag (unstow new bag)

ON-ORBIT PCS 2(1) CONFIG 19

C	L2	√O2 XOVR SYS (two) - OP O2/N2 CNTLR VLV SYS 1(2) - CL 2(1) - AUTO
	O1	O2/N2 FLOW sel - SYS 2(1) O2
	C7	√LEH O2 SPLY vlv (two) - OP Expect possible 'S66 CAB O2(N2) FLO 2(1)' msg
MS	MO10W	14.7 CAB REG INLET SYS 2(1) vlv - OP H2O TK N2 REG INLET SYS 1(2) vlv - CL O2 REG INLET SYS 2(1) vlv - OP
	MO69M	√LEH O2 8 vlv - CL Insert O2 Bleed Orifice Assembly into LEH O2 8 QD LEH O2 8 vlv - OP

AIRLOCK SETUP FOR INGRESS 21

INNER	1. Equal vlv caps (two) - remove, stow
HATCH	2. √Equal vlv (two) - NORM
	3. Open hatch per decal
AW18A	4. LTG FLOOD 1(3,4) - ON (as reqd)
MO13Q	5. AIRLK 2 - ON/OFF
	6. √AIRLK H2O S/O vlv - OP (tb-op)
MIDDECK FLR	7. √EMU O2 ISOL vlv - CL
	8. Remove, stow diffuser cap on middeck floor air fitting (mark)
	9. Unstow, install bypass duct to middeck floor fitting
	10. √Airflow at top of external airlock halo

If Spacehab flown and reingress desired:  
11. Go to SPACEHAB INGRESS AFTER WAVEOFF  
(SH OPS, ON-ORBIT)

If orbiter only and Spacehab reingress not desired:  
12. Unstow bypass duct from Tunnel Extension wall and install on middeck floor fitting

HOOK  
VEL-  
CRO

HOOK  
VEL-  
CRO


HOOK  
VEL-  
CRO

D/O-2b/E/A

CC-8-5  
(reduced copy)

D/O/ALL/GEN Q

This Page Intentionally Blank

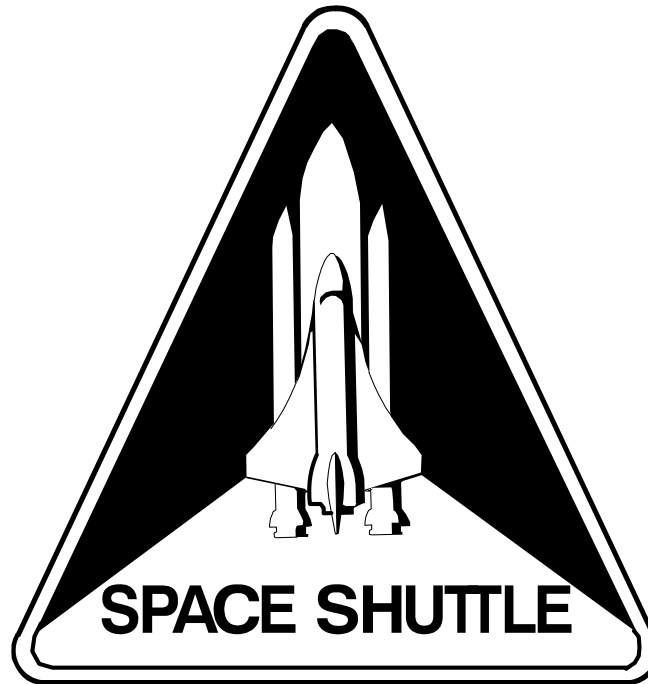

**DEORBIT PREP**

**STS  
ALL**